



KEYENCE

High-speed optical micrometer
LS-9000 Series

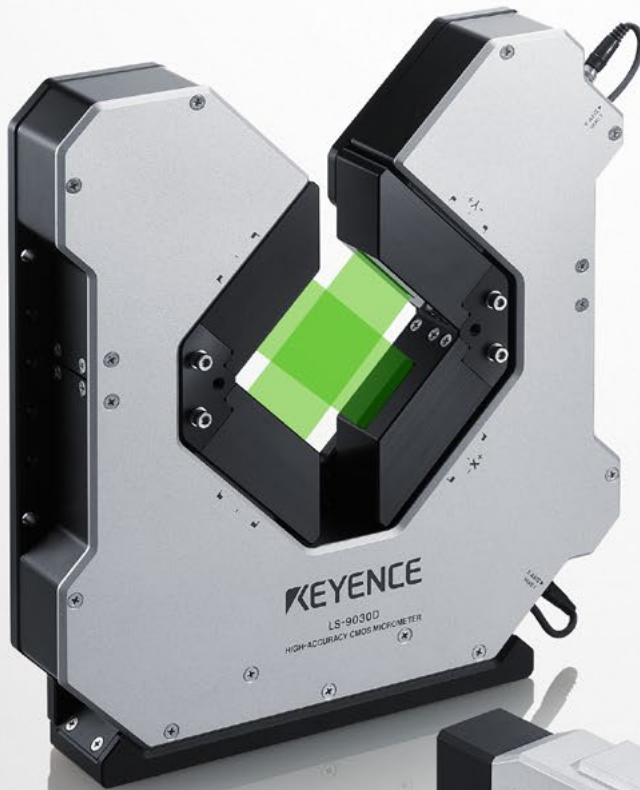

Fastest in its class

16000 Hz
sampling rate

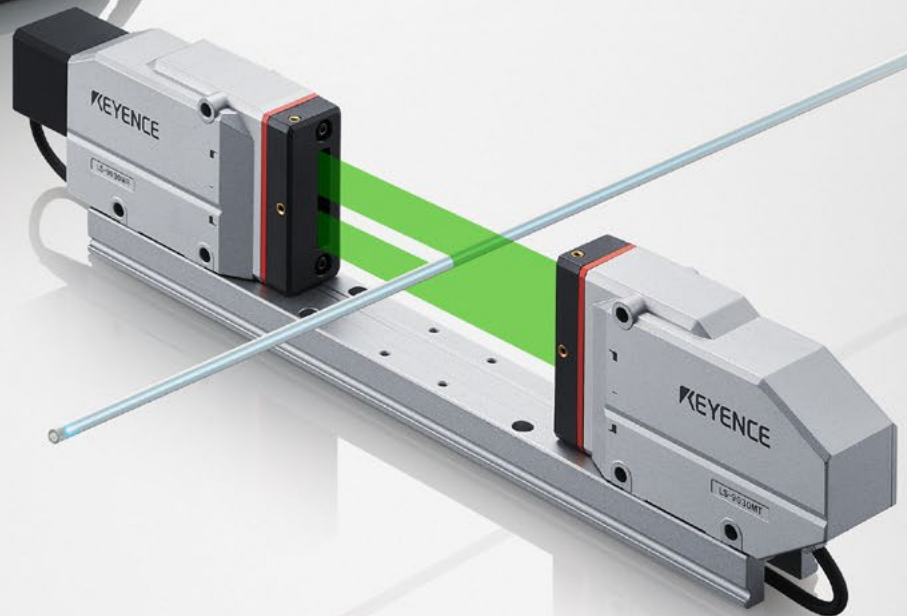

A NEW HIGH PRECISION MICROMETER SYSTEM

AUTOMATICALLY CORRECTS FOR TARGET MISALIGNMENT AND VIBRATION


LS-9000 Series

Compare against existing technology

The performance needed for 100% in-line measurement
KEYENCE's proprietary 3-CMOS x Green-LED measurement system


LS-9000 3-CMOS x Green-LED system

[Principle] Green-LED light is emitted as a uniform collimated beam. The CMOS detects the position of the edge between light and dark edges of the received light and calculates measured values.

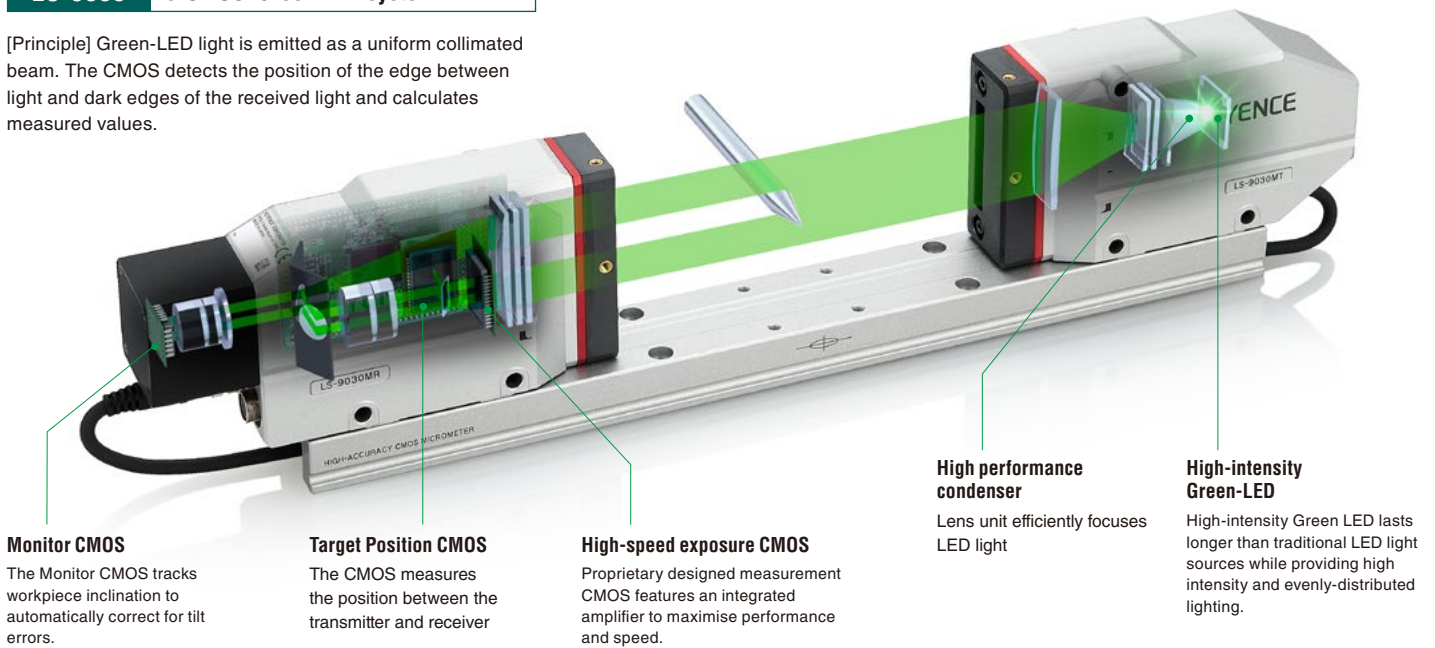


Conventional Technology Laser scan micrometer system

[Principle] A semiconductor laser is fired at a rotating polygon mirror and scans through the measurement range. Measured values are calculated by measuring how long the laser is obstructed by the target

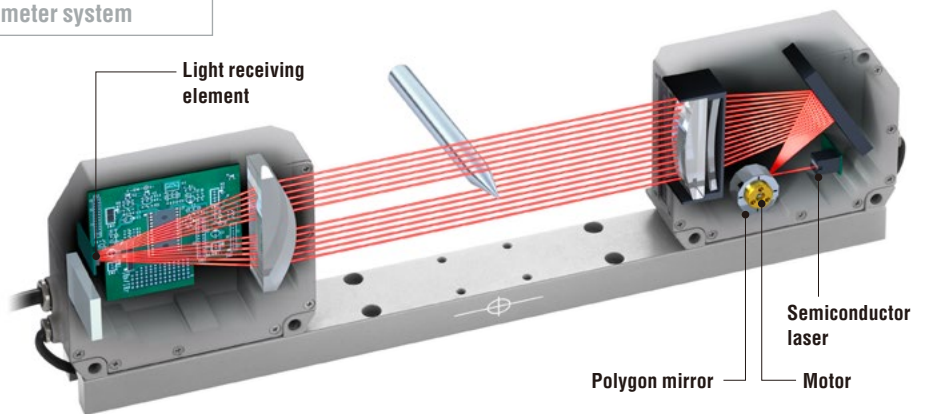

High-speed, Optical Micrometer:
the LS-9000 Series

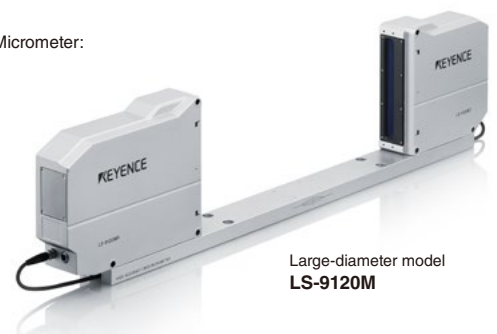

Speed

Stability

Durability

With the LS-9000 Series

13.3 times faster than conventional systems
Fastest in its class

16000 Hz sampling rate

Fitted with a high-speed exposure CMOS and high-intensity Green-LED to produce a 16000 Hz sampling rate, far outstripping previous systems. Improves production line cycle times and ensures more stable measurement.

A world-first

Active Tilt and Vibration Correction

The high-speed exposure CMOS clearly recognises measurement targets that suddenly move due to target vibration and corrects measurement errors. The monitor CMOS determines the alignment of the target to enable accurate measured values.

Low maintenance

No moving parts

Thanks to KEYENCE's proprietary optic design there are no moving parts. The use of a LED light source means no errors due to external sources. This combination of no moving parts with a LED light source means it can be used on-site for extended periods without requiring regular maintenance.

Problems with conventional systems

1200 Hz sampling

Motor speed must be increased to raise the sampling rate. However, it was hard to achieve both durability and stability, and the speed could not be dramatically increased.

* LS-5000 Series

Target alignment and vibration cause errors

Could not recognise tilting of the target due to only having one source of measurement data. Vibration in the target could also cause errors in the scan that lead to incorrect values.

Moving parts deteriorate

Regular calibration of the polygon mirror and laser was required due to the wear-related deterioration of moving parts.



2-axis standard model
LS-9030D



2-axis small-diameter model
LS-9006D



Standard model
LS-9030 (M)

Small diameter model
LS-9006 (M)



Display and settings panel
LS-D1000



Controller
LS-9501 (P)

Enhanced speed and accuracy

3-CMOS System

Three separate CMOS sensors provide advanced inspection capabilities

Target positioning CMOS


Monitor CMOS

High-speed exposure CMOS

Even vibrating targets are measured stably

High-speed exposure is used so that a precise inspection of the target can be performed even if the target is vibrating, making accurate measurement possible.

Measuring the outer diameter of a high-speed wire

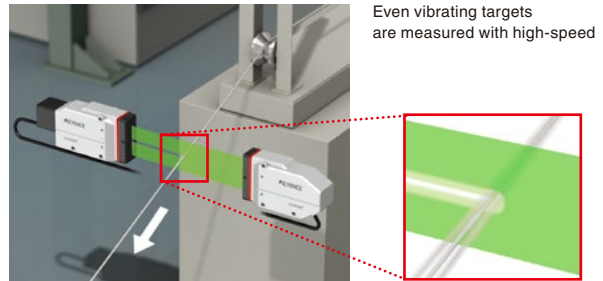


High-speed CMOS

16000 Hz sampling


By integrating the peripheral circuits of the measurement CMOS into one chip, the S/N ratio has been dramatically improved and high-speed sampling achieved. For example, targets that move at 1000 m/min. can be measured at a pitch of around 1 mm. Even parts that vibrate at high speeds can be measured stably.

Error in relation to vibrating workpieces

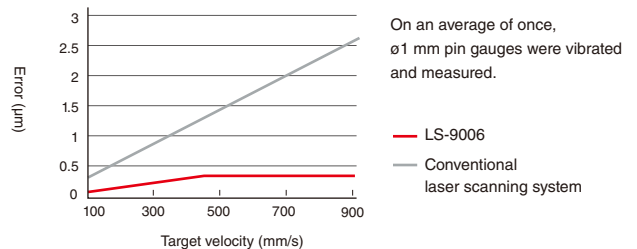

Even misaligned parts are measured stably


The target monitor CMOS recognises the orientation of the part and adjusts the measured value so there are no measurement errors due to inclination.

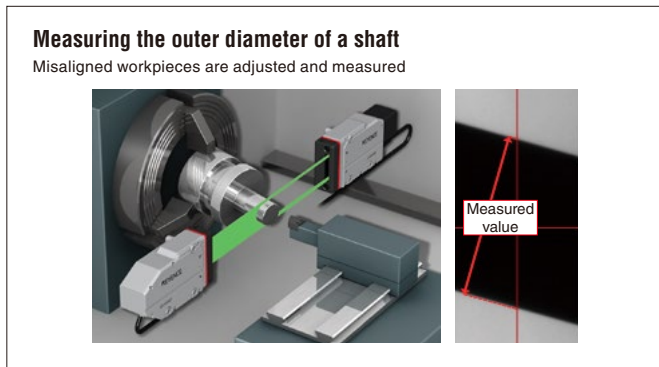

Monitor CMOS

Alignment adjustment^{*1}


Recognises the misalignment of a workpiece from the image taken by the monitor CMOS. Inclination error is removed automatically and does not affect the measurement result. The captured image can also be checked with computer software so even novices will have no problem taking measurements.

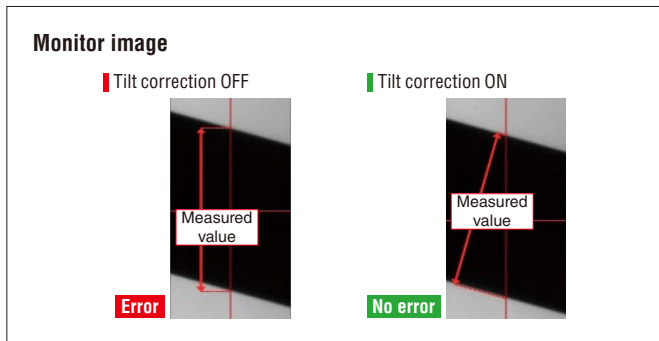

^{*1} Functions of the LS-9006M and LS-9030M heads only.

Two axis target position indicator


The LS-9000 can use the target positioning CMOS receiver to determine the location of the measurement target in two axes. This makes installation and part position feedback simple, even with a single axis system.

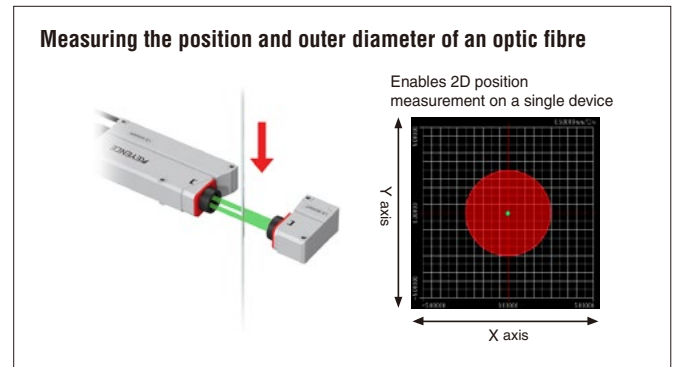

Target positioning CMOS

Transmitter/receiver direction and position measurement^{*2}

With the additional data obtained from the target positioning CMOS, the LS-9000 can determine the position of the target in both the X and Y axes.

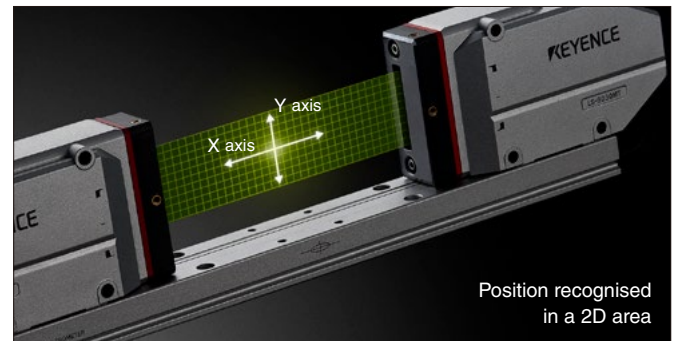


^{*2} Functions of the LS-9006 (M) and LS-9030 (M) heads only.

Enhanced durability and reliability

High durability design

Constructed with no moving parts, a design that offers enhanced service life.

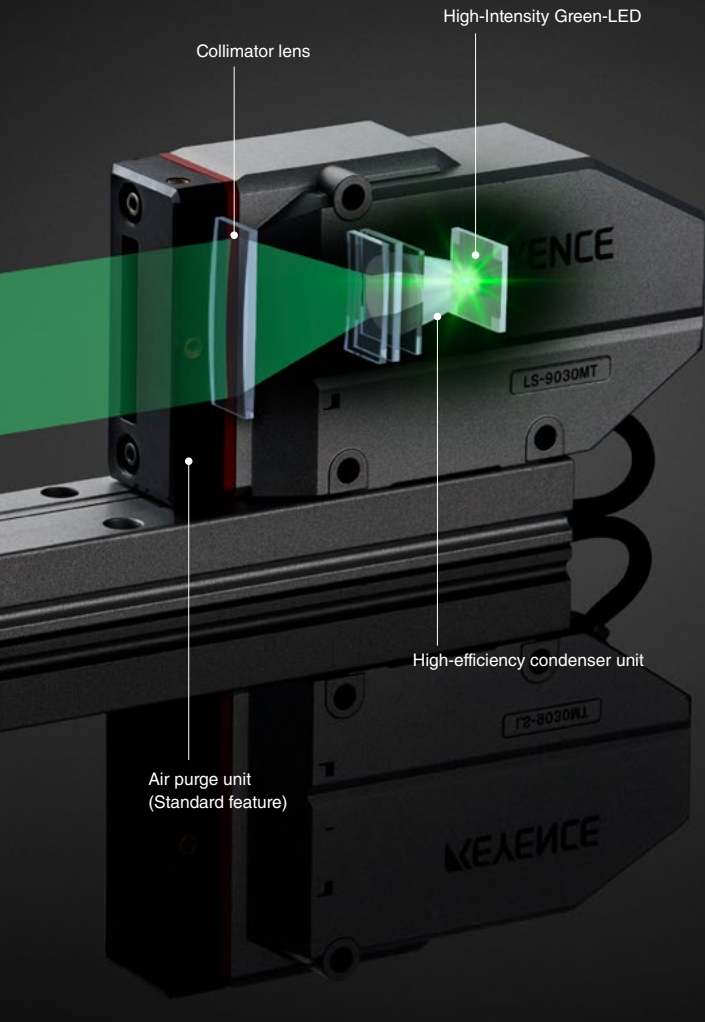

Huge reduction of maintenance time

With no motor to introduce wear and a long lifespan LED, minimal maintenance is required.


	LS-9000 Series	Existing systems
Motor durability	✓	✗
Light source durability	✓	✗



High-intensity Green-LED + high-efficiency condenser unit


Our proprietary wear-free construction

As a high intensity Green LED is used to generate the measurement beam, laser degradation typical with traditional systems is completely avoided. In addition, as the entire beam is generated with no moving parts, there is no motor or mirror system to wear out or replace.

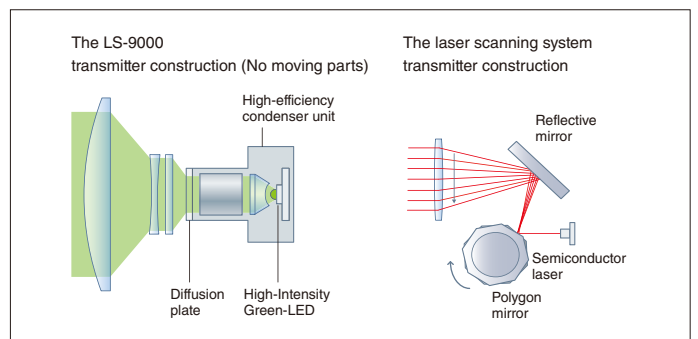

Stable measurements in harsh environments

The effects of water, dust, and oil mist on the measurement value are eliminated.

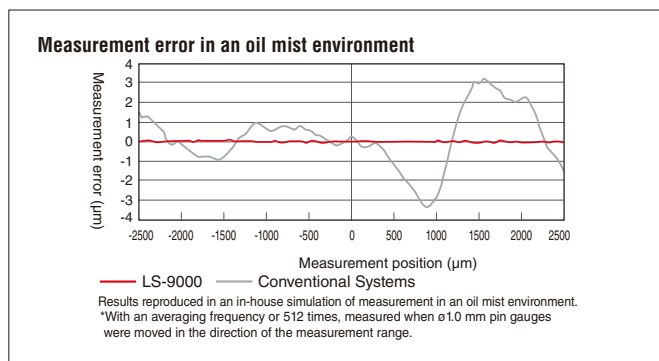

IP67 construction + air purge unit

Best in class environmental resistance design*


The system enclosure maintains an IP67 rated protection for all internal components. In addition, the LS-9000 Series heads come standard with a built in air purge mechanism to further enhance the system's resistance to environmental influence.



* The air purge unit is sold as an optional accessory only for the LS-9120M head.

Extreme resistance to shock and temperature drift

Revolutionary design eliminates the influence of shock and temperature fluctuations on the measurement value.

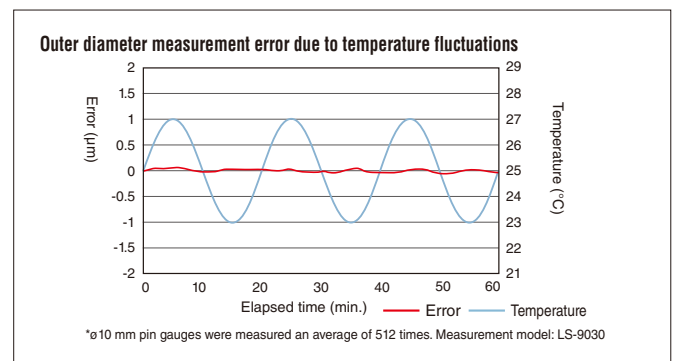

Die-cast housing + optical unit protection design

Hardened housing protects internal construction

The outer die-cast body has been mechanically isolated from the internal optical unit so that the outer body absorbs shocks and temperature variations, protecting the internal optics. Meets the IEC 68-2-29 standard (15G/6 ms) for shock resistance.




Easy setup and analysis via a computer.

Computer software solves those “difficulties” in setting and measuring

Conventional measurement system

- Setting each device separately is time-consuming
- Original settings are easily lost
- Controller setup is complicated and hard to understand
- Difficult to verify measurement setup
- Needs a separate recorder to save data


The LS-Navigator2 setup and diagnostics software simplifies and streamlines setup. (OPTIONAL)

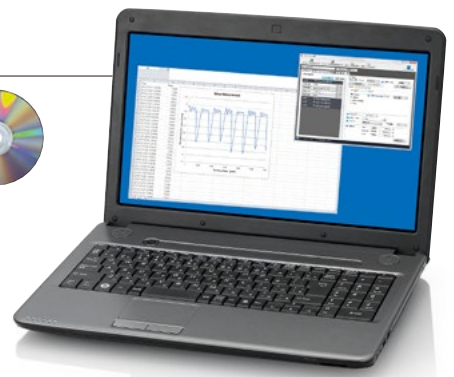

Easy setting and backup

Easy visual setting


Measurement details can be selected from a picture, so settings are simple, even for a novice. Setting details are stored on the computer as backup files.

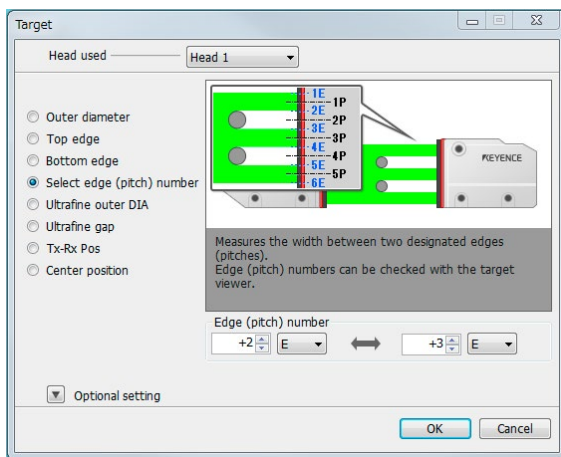

Customise your display

Multifunction measurement display


Support software features 12 independent display tools that let you customise your display. View any and all the information you need on a single screen to maximise efficiency.

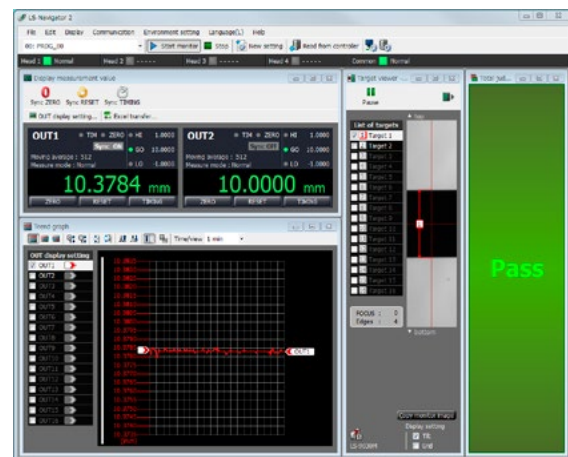

Automatically record data

High-capacity data storage

With a storage capacity of 400,000 points, it is easy to record output data without external units. This data can then easily be exported to Excel.

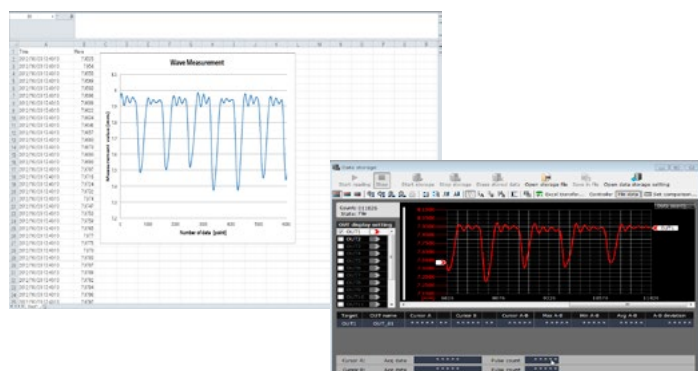

New measurement functions that make previously unobtainable measurements easy

■ Ultra-thin outer diameter and ultra-thin gap measurement*

Specialised ultra-fine diameter/gap tool now allows measurement of gaps and diameters previously undetectable.

Measuring the outer diameter of an ultra-thin wire

Smallest detectable object

	Standard mode	Ultra-thin mode
6 mm type	40 μm	10 μm
30 mm type	300 μm	80 μm

* Functions of the LS-9006 (M) and LS-9030 (M) heads only.

■ 16-channel simultaneous measurement

With up to 16 simultaneous outputs, it is possible to measure any combination of diameters, position, gaps, etc. to meet your needs.

Measuring the outer diameter and runout of a photocopier roller

■ Irregular surface cancellation

Irregular surface cancellation allows for proper outer diameter inspection of parts with complex profiles such as key slots or D-cuts.

Measuring the outer diameter of a motor shaft

■ Transparent object/two-level edge detection threshold value setting

Using two-level threshold settings, it is possible to simultaneously measure two targets of differing transparency.

Taking dimensional measurements of transparent film and coating material

■ Terminal operation monitoring


Ability to monitor live terminal I/O status with manual test data output greatly simplifies setup and troubleshooting.

■ Multi-point calibration

Up to 8 points can be adjusted and scaled. Multiple targets of differing diameters can be measured more precisely.

Controller

A wide variety of interfaces to ensure easy integration

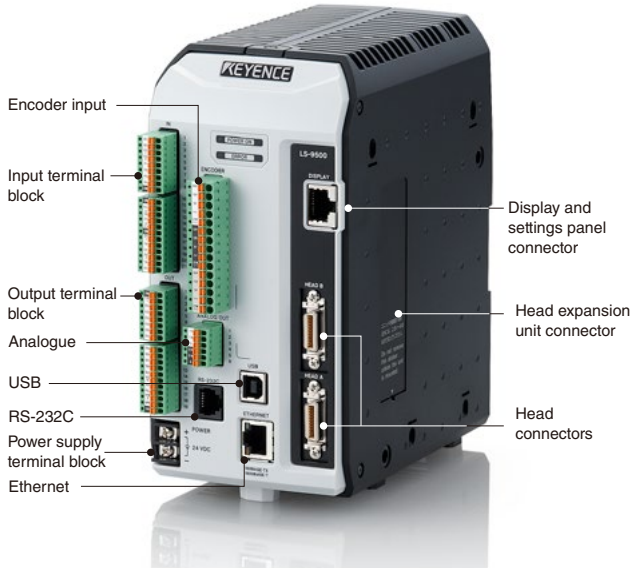

Controller **LS-9501 (P)**

A variety of I/O to suit on-site needs is a standard feature.

Controller line-up

NPN output type	LS-9501
PNP output type	LS-9501P



Setting and support software **LS-H2**



USB cable **OP-66844**

Max. of 4 heads can be connected

When an LS-HA100 head expansion unit is connected, a maximum of 4 heads can be connected.

Head cable Maximum extension 40 m

Encoder input

Can capture data whose signals have been synchronized with encoder pulses.

HMI/Display



Display and settings panel **LS-D1000**

Measured values, judgment values and positions can be seen at a glance on the display panel. A maximum of 4 displays can be connected.



Display panel stand **OP-87610**



Stand switch **OP-87611**

Expansion units



Head expansion unit **LS-HA100**

Used when 3 or 4 heads are being used.



EtherNet/IP™ unit **CB-EP100**

PROFINET unit **CB-PN100**



BCD output unit **CB-BD100**

Cables



Head cable **CB-B3** (3 m) **CB-B10** (10 m)



Head extension cable **CB-B5E** (5 m) **CB-B10E** (10 m) **CB-B20E** (20 m)



Transmitter-receiver cable **OP-87686** (1 m) **OP-87687** (3 m)



Display panel cable **OP-87602** (2 m) **OP-87603** (5 m) **OP-87604** (10 m) **OP-87605** (20 m)



RS-232C cable **OP-96368** (2.5 m)



D-sub 9-pin connector **OP-26401**



Ethernet cable **OP-66843**



Extension I/O cable (3 m) For the BCD output unit **OP-51657**

Options



Target positioning jig **OP-87609** (For the LS-9030) **OP-87684** (For the LS-9006) **OP-87749** (For the LS-9030D) **OP-87750** (For the LS-9006D)

Replacement glass **OP-87697** (For the LS-9030) **OP-87698** (For the LS-9006 transmitter head) **OP-87699** (For the LS-9006 receiver head) **OP-87756** (For the LS-9120M)

40 m extension connection unit **CB-BR01**


Replacement air purge unit **OP-87695** (For the LS-9030) **OP-87696** (For the LS-9006) **OP-87751** (For the LS-9030D) **OP-87752** (For the LS-9006D) **OP-87755** (For the LS-9120M)

Display panel protection sheet (Set of 5 sheets) **OP-87729**

Display panel stay **OP-87757**

Heads

Standard type offers both high speed and high precision

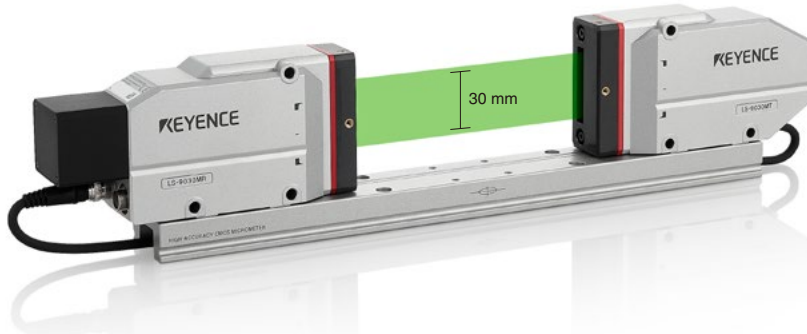

Standard model

LS-9030M (with monitor camera)
LS-9030 (without monitor camera)

Measurement range	0.08 to 30 mm
Smallest detectable object	0.08 mm
Measurement accuracy	±2 μm
Repeatability	±0.1 μm

Precise measurement of small diameter workpieces




Small-diameter model

LS-9006M (with monitor camera)
LS-9006 (without monitor camera)

Measurement range	0.01 to 6 mm
Smallest detectable object	0.01 mm
Measurement accuracy	±0.5 μm
Repeatability	±0.03 μm

Measures large-diameter workpieces of up to 120 mm in size

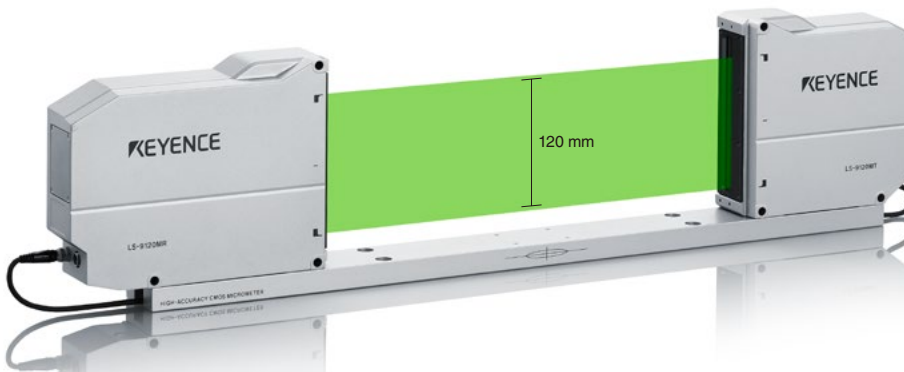

Large-diameter model

LS-9120M

Measurement range	0.8 to 120 mm
Smallest detectable object	0.8 mm
Measurement accuracy	±8 μm
Repeatability	±0.3 μm

Achieves high-speed and high-accuracy with two axes



2-axis standard model

LS-9030D (without monitor camera)

Measurement range	0.3 to 30 mm
Smallest detectable object	0.3 mm
Measurement accuracy	±2 μm
Repeatability	±0.1 μm

Uses two axes to perform highly accurate measurements of small-diameter workpieces



2-axis small-diameter model

LS-9006D (without monitor camera)

Measurement range	0.04 to 6 mm
Smallest detectable object	0.04 mm
Measurement accuracy	±0.5 μm
Repeatability	±0.03 μm



■ Head (Standard model/small-diameter model)

Model	LS-9006M (with monitor camera)	LS-9006 (without monitor camera)	LS-9030M (with monitor camera)	LS-9030 (without monitor camera)
Measurement range	0.04 mm (0.01 mm) to 6 mm		0.3 mm (0.08 mm) to 30 mm	
Smallest detectable object	0.04 mm (0.01 mm)		0.3 mm (0.08 mm)	
Transmitter/receiver distance	60 ±5 mm		160 ±40 mm	
Repeatability	±0.03 μm*1		±0.1 μm*2	
Measurement accuracy	±0.5 μm*3		±2 μm*4	
Sampling cycle*7	16000 samples/sec.			
Transmitter/receiver direction and position detection	Detection area	4 x 5 mm	20 x 24 mm	
	Smallest detectable object	0.04 mm	0.3 mm	
	Repeatability	±0.02 mm*5	±0.2 mm*6	
	Sampling cycle	4000 samples/sec.		
Light source	InGaN green LED			
Monitor camera	Provided	Not provided	Provided	Not provided
Environmental resistance	Ambient temperature	0 to +50°C		
	Relative humidity	20 to 85% RH (no condensation)		
	Ambient light	Incandescent lamp/fluorescent lamp 3000 lux or lower		
	Vibration resistance	10 to 55 Hz, double amplitude 1.5 mm, 2 hours in each direction (X,Y, and Z)		
	Shock resistance	15G/6 ms		
Enclosure rating	IP67 (including connector)			
Material	Aluminium			
Weight	Transmitter: Approx. 130 g Receiver: Approx. 300 g Base: Approx. 180 g	Transmitter: Approx. 130 g Receiver: Approx. 280 g Base: Approx. 180 g	Transmitter: Approx. 440 g Receiver: Approx. 500 g Base: Approx. 430 g	Transmitter: Approx. 440 g Receiver: Approx. 440 g Base: Approx. 430 g

The values in brackets are measured in ultra-thin mode. For details on the accuracy of ultra-thin mode, contact the nearest KEYENCE office.

- *1 A ±2σ margin of error when measuring a ø1.0 mm rod in the centre of the measurement area using outer diameter mode with the average measurement number set as 2048 times.
- *2 A ±2σ margin of error when measuring a ø10 mm rod in the centre of the measurement area using outer diameter mode with the average measurement number set as 2048 times.
- *3 Margin of error when a moving ø1.0 mm rod is measured in the 2 mm x 4 mm measurement area using outer diameter mode.
- *4 Margin of error when a moving ø10 mm rod is measured in the 10 mm x 20 mm measurement area using outer diameter mode.
- *5 A ±2σ margin of error when measuring the position of a ø1.0 mm rod in the centre of the measurement area with the average measurement number set as 512 times.
- *6 A ±2σ margin of error when measuring the position of a ø10 mm rod in the centre of the measurement area with the average measurement number set as 512 times.
- *7 The sampling cycle is changed by the number of OUT set, and by the use of the mutual interference prevention function.

■ Head (2-axis standard model/2-axis small-diameter model)


Model	LS-9006D	LS-9030D
Measurement range	ø0.04 mm to ø6 mm	ø0.3 mm to ø30 mm
Smallest detectable object	0.04 mm	0.3 mm
Repeatability	±0.03 μm*1	±0.1 μm*2
Measurement accuracy	±0.5 μm*3	±2 μm*4
Sampling cycle*5	16000 samples/sec.	
Light source	InGaN green LED	
Monitor camera	Not provided	
Environmental resistance	Ambient temperature	0 to +50°C
	Relative humidity	20 to 85% RH (no condensation)
	Ambient light	Incandescent lamp/fluorescent lamp 3000 lux or lower
	Vibration resistance	10 to 55 Hz, double amplitude 1.5 mm, 2 hours in each direction (X,Y, and Z)
	Shock resistance	15G/6 ms
Measuring head enclosure rating	IP67 (including connector)	
Material	Aluminium	
Weight	Approx. 4.8 kg	Approx. 9 kg

- *1 A ±2σ margin of error when measuring a ø1.0 mm rod in the centre of the measurement area using outer diameter mode with the average measurement number set as 2048 times.
- *2 A ±2σ margin of error when measuring a ø10 mm rod in the centre of the measurement area using outer diameter mode with the average measurement number set as 2048 times.
- *3 Margin of error when a moving ø1.0 mm rod is measured in the 2 mm x 2 mm measurement area.
- *4 Margin of error when a moving ø10 mm rod is measured in the 10 mm x 10 mm measurement area.
- *5 The sampling cycle is changed by the number of OUT set, and by the use of the mutual interference prevention function.

■ Measuring area and accuracy


LS-9006D

Unit: mm



LS-9030D

Unit: mm



Head (Large-diameter model)



Model		LS-9120M
Measurement range		0.8 mm to 120 mm
Smallest detectable object		0.8 mm
Transmitter/receiver distance		400 ±100 mm
Repeatability		±0.3 μm*1
Measurement accuracy		±8 μm*2
Sampling cycle		16000 samples/sec.
Light source		InGaN green LED
Monitor camera		Provided
Environmental resistance	Ambient temperature	0 to +50°C
	Relative humidity	20 to 85% RH (no condensation)
	Ambient light	Incandescent lamp/fluorescent lamp 3000 lux or lower
	Vibration resistance	10 to 55 Hz, double amplitude 1.5 mm, 2 hours in each direction (X, Y, and Z)
	Shock resistance	15G/6 ms
Enclosure rating		IP67 (including connector)
Material		Aluminium
Weight		Transmitter: Approx. 1800 g, Receiver: Approx. 2800 g, Base: Approx. 1600 g

*1 A ±2σ margin of error when measuring a ø40 mm rod in the centre of the measurement area using outer diameter mode with the average measurement number set as 2048 times.

*2 Margin of error when a moving ø40 mm rod is measured in the 40 mm × 120 mm measurement area using outer diameter mode.

Controller



Model		LS-9501	LS-9501P
No. of connectable sensor heads		2	
Head compatibility		Yes	
Display	Minimum display unit	0.01 μm	
	Display range	±99999.99 μm to ±9999.9 mm	
	LED display	POWER ON indicator, ERROR indicator	
Input terminal block	Encoder input	NPN/PNP open-collector output, voltage output (5 V/12 V/24 V), line-driver output	
	Synchronous 1, 2 input	Non-voltage input	Voltage input
	Auto-zero 1, 2 input		
	Reset 1, 2 input		
	Storage trigger input		
	Storage enable input		
	Storage data clear input	Non-voltage input x 4 inputs	Voltage input x 4 inputs
	Statistics 1, 2 input		
	Statistics clear 1, 2 input		
	Program selection input		
Output terminal	Analogue voltage output	±10 V x 2 outputs, output impedance 100 Ω	
	Analogue current output	4 to 20 mA x 2 outputs, compatible load max. 350 Ω	
	Universal output	NPN open-collector output x 10 outputs Measured value and tolerance judgment output, status output allocatable	PNP open-collector output x 10 outputs Measured value and tolerance judgment output, status output allocatable
	Status 1, 2 output	NPN open-collector output	PNP open-collector output
	Total judgment output		
	Memory FULL output		
	Strobe 1, 2 output		
Error output	NPN open-collector output (N.C.)	PNP open-collector output (N.C.)	
Ethernet interface*1		1000BASE-T/100BASE-TX	
USB interface*1		USB 2.0 HI-SPEED supported (USB 1.1 Full-SPEED compatible)	
RS-232C interface		Measured value output, control I/O, setting change, baud rate can be selected up to 115,200 bps	
Display and settings panel interface		LS-D1000 Max. four heads connectable	
Rating	Power supply voltage	24 VDC ±10%, including ripple (P-P)	
	Current consumption*2	When LS-HA100 not used: 1.0 A max. when 1 head connected; 1.4 A max. when 2 heads connected When LS-HA100 in use: 2.0 A max. when 3 heads connected; 2.3 A max. when 4 heads connected	
Environmental resistance	Ambient temperature	When LS-HA100 not used: 0 to +50°C When LS-HA100 in use: 0 to +45°C	
	Relative humidity	20 to 85% RH (no condensation)	
Weight		Approx. 1500 g	

•NPN open-collector output rating: 50 mA max. (40 V max.), residual voltage of 1 V max.

•PNP open-collector output rating: 50 mA max. (30 V max.), residual voltage of 1 V max.

•Non-voltage input rating: ON voltage of 1 V max., OFF current of 0.6 mA max.

•Voltage input rating: Input max. voltage 26.4 V, min. ON voltage 10.8 V, OFF current 0.6 mA max.

*1 Sample DLL and LabVIEW programs are available. Contact your local sales office for details.

*2 Add the current consumption values for all units when connecting the display settings panel and expansion units.

When the LS-9006D or LS-9030D is connected, it counts as two heads.

Head expansion unit



Model		LS-HA100
No. of connectable sensor heads		2
Head compatibility		Yes
LED display		POWER ON indicator, head status indicator
Analogue voltage output		±10 V x 2 outputs Output impedance 100 Ω
Analogue current output		4 to 20 mA x 2 outputs Compatible load max. 350 Ω
Power source		Supplied from the controller
Environmental resistance	Ambient temperature	0 to +45°C
	Relative humidity	20 to 85% RH (no condensation)
Weight		Approx. 600 g

■ OS environment for using the LS-H2 (LS-Navigator 2) Setting Support Software

Item	Required environment
Operating System	Windows 10*1 Windows (SP1 or later)*2 Windows Vista (SP2 or later)*3 Windows XP (SP3 or later)*4
Supported languages	Japanese, English, German, Simplified Chinese, Traditional Chinese
CPU	Core 2 Duo 2 GHz or more
Memory capacity	2 GB or more
L2 cache memory	2 MB or more
Free space in hard disk	10 GB or more
Display	XGA (1024 × 768 pixels) or more, 256 colours or more
Interface	USB
	Ethernet
	USB 2.0 HI-SPEED supported (USB 1.1 Full-SPEED compatible)*5 Ethernet 100BASE-T/100BASE-TX*6

If you wish to use the send to Excel function, please check that one of the Excel versions listed below is installed on your computer.

Excel 2010 (32 bit/64 bit), Excel 2007, Excel 2003, Excel 2002

*1 Home, Pro, and Enterprise editions are supported.

*2 Home Premium, Professional, and Ultimate editions are supported.

*3 Ultimate, Business, Home Premium, and Home Basic editions are supported.

*4 Professional and Home editions are supported.

*5 Connection through a USB hub is not included in the guarantee.

*6 Connection to LAN and connection via a router is not included in the guarantee.

■ Display and settings panel



Model		LS-D1000
Display interface	Measured value display	Measured value display: 2 colours, 8 digits, 16 segments OUT number display: Monochrome, 2 digits, 7 segments Tolerance judgment display: HH, HI, GO, LO, LL. Monochrome Control status display: TIM, ZERO indicator. Monochrome
		Program number display Monochrome, 2 digits, 7 segments
	Position monitor display	1D display: 2 colours, 32 levels 2D display: Monochrome, 7 x 7 matrix display
	Display update cycle	5 times/sec.
Operation input interface		Numeric keypad, function key, lock key timing input key, zero input key, reset input key, escape key, arrow keys (4)
Display and settings panel connection port		2
Power supply		Supplied from the controller
Rating	Current consumption	0.19 A max.
Environmental resistance	Ambient temperature	0 to +50°C
	Relative humidity	20 to 85% RH (no condensation)
Enclosure rating		IP65 (When panel attached, front surface only)
Weight		Approx. 400 g

■ BCD output unit

Model		CB-BD100
LED display		POWER-ON LED
Output terminal	BCD output *1	NPN open-collector output x 4 ports
	Strobe output	NPN open-collector output x 4 outputs
	OUT selection output	NPN open-collector output x 4 outputs
Input terminal	OUT selection input	Non-voltage input x 4 inputs
Power source		Supplied from the controller
Rating	Current consumption	0.16 A max.
Environmental resistance	Ambient temperature	0 to +50°C
	Relative humidity	20 to 85% RH (no condensation)
Weight		800 g

· Up to 1 unit can be connected to the controller.

· NPN open-collector output rating: 30 mA max. (30 V max.), residual voltage of 0.5 V max.

· Non-voltage input rating: ON voltage of 1 V max., OFF current of 0.6 mA max.

*1 Selectable from BCD output (29 bits, signed), binary output (25 bits, negative numbers are represented by the two's complement), and judgment output.

■ EtherNet/IP™ unit

Model		CB-EP100
Compatible network		EtherNet/IP™ and displacement sensor-specific protocols (socket communication)
Ethernet	Compliant standards	IEEE 802.3 (10BASE-T), IEEE 802.3u (100BASE-TX)
	Transmission speed	10 Mbps (10BASE-T), 100 Mbps (100BASE-TX)
	Transmission media	STP or Category 3 or higher UTP (10BASE-T), STP or Category 5 or higher UTP (100BASE-TX)
	Maximum cable length	100 m (Distance between the unit and Ethernet switch)
	Maximum number of connectable hubs *1	4 hubs (10BASE-T), 2 hubs (100BASE-TX)
EtherNet/IP™	Supported functions	Cyclic communication (Implicit messaging), Message communication (Explicit messaging), Compatible with UCMM and Class 3
	Number of connections	64
	RPI	0.5 ms to 10000 ms (in 0.5 ms)
	Tolerable communication bandwidth for cyclic communication	6000 pps
	Message communication	UCMM, Class 3
Conformance test		Compatible with Version A9
Power supply voltage		24 VDC ±10%, including ripple (P-P) (supplied from the controller unit of the laser scanner)
Current consumption		0.12 A max.
Environmental resistance	Ambient temperature	0 to +50°C
	Relative humidity	20 to 85% RH (no condensation)
Weight		Approx. 470 g


*1 The number of connectable hubs is not limited when using a switching hub.

■ PROFINET unit


Model		CB-PN100
Compatible network		PROFINET IO communication
Ethernet	Compliant standards	IEEE 802.3u *1
	Transmission speed	100 Mbps, full duplex (100BASE-TX)
	Transmission media	STP or Category 5e or higher UTP
	Maximum cable length	100 m
PROFINET IO	Supported functions	Data I/O communication Record data communication
	Number of connectable PROFINET IO controllers	1
	Update time	2 ms to 2048 ms
	GSDML	Version 2.25
	Conformance class	Conformance Class A compliant
	Conformance test version	Based on Version 2.2.4
	Applicable protocol	LLDP, DCP
Power supply voltage		24 V ±10% (supplied from the controller unit of the laser scanner)
Current consumption		0.12 A max.
Weight		Approx. 470 g

*1 Although this unit conforms to IEEE 802.3u and can establish 100 Mbps full duplex communication using AutoNegotiation function, it does not have AutoCrossOver and AutoPolarity functions that are normally required for the PROFINET IO standard. Select a straight or cross cable according to the Ethernet port of the device to be connected.

LS-9006D

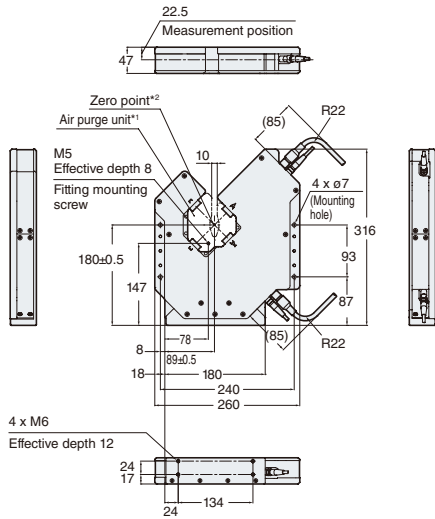


LS-9030D

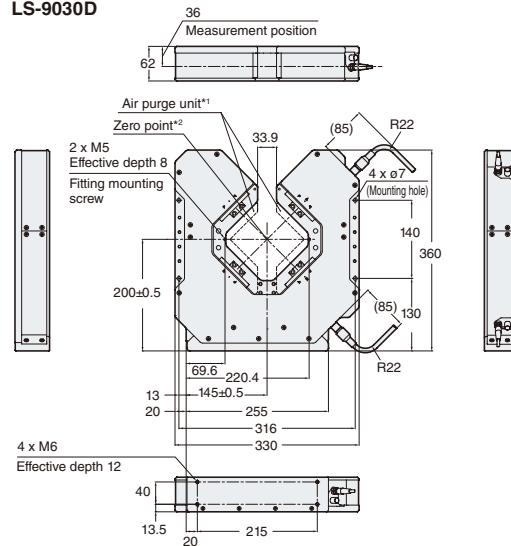


*1 With air purge unit attached
 *2 The zero point represents the intersection of the optical axis centre of X-axis head and that of the Y-axis head.


LS-9120M

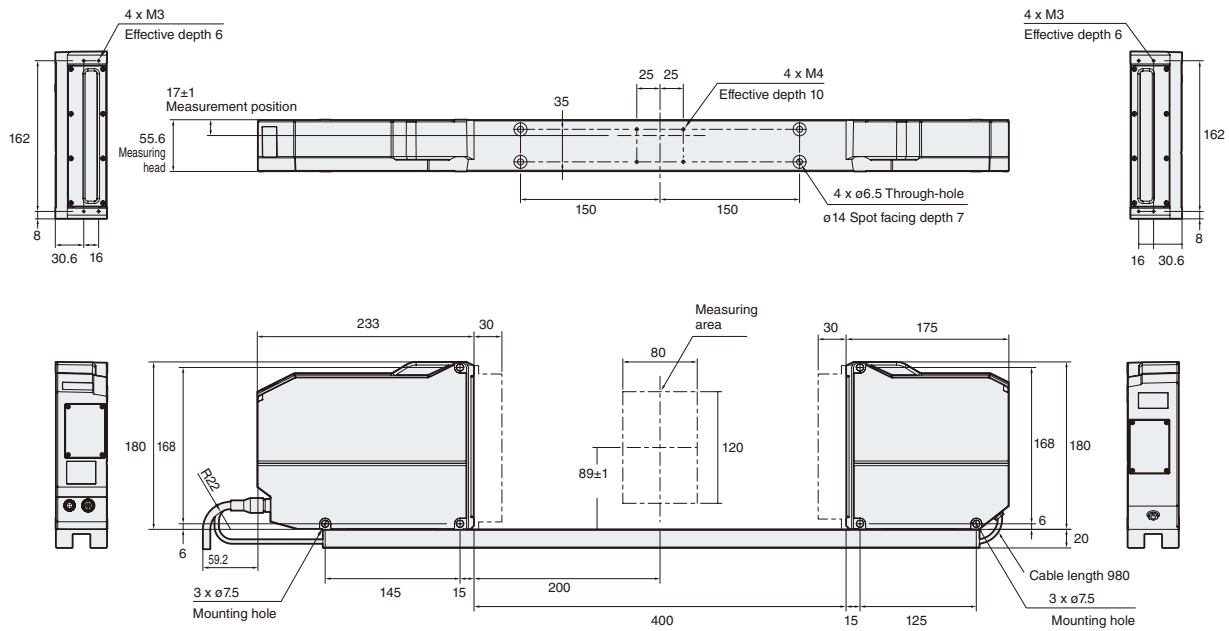


LS-9501/LS-9501P

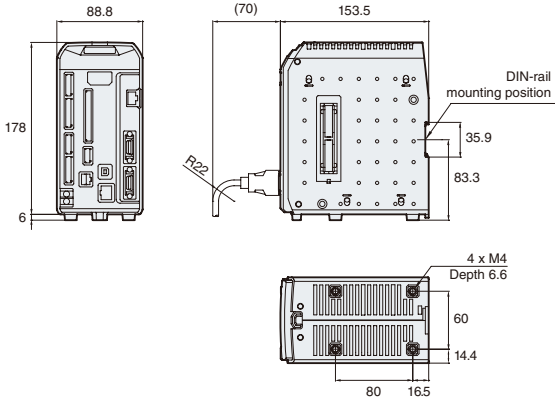


LS-HA100

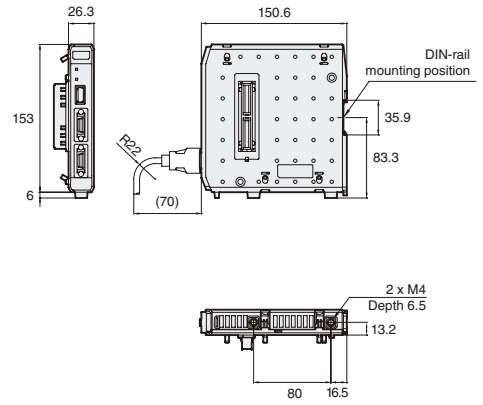


CB-BD100

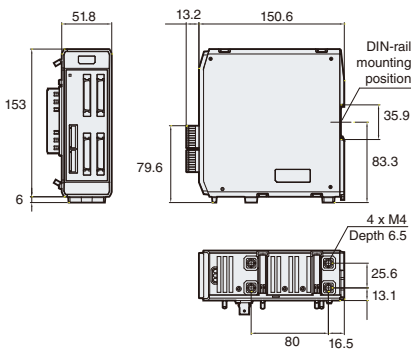


CB-EP100/CB-PN100

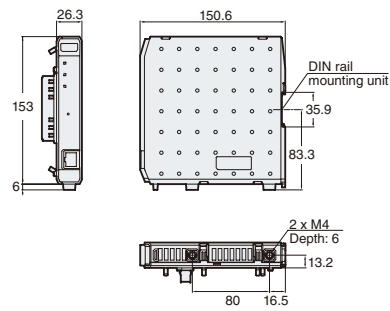


LS-D1000

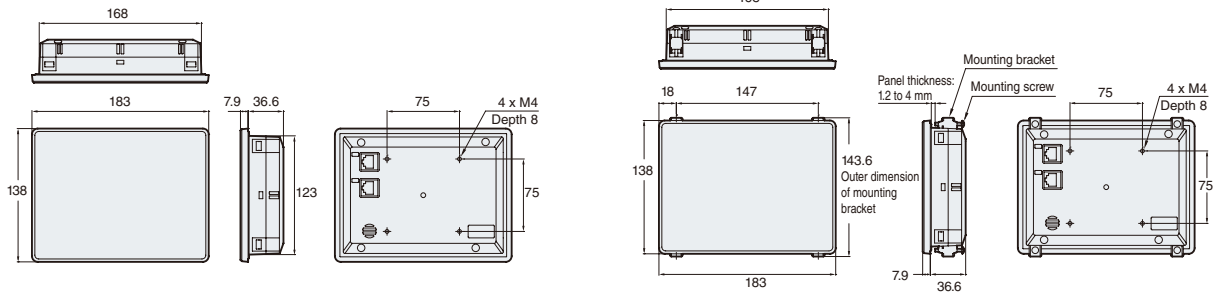


Panel cutout dimensions

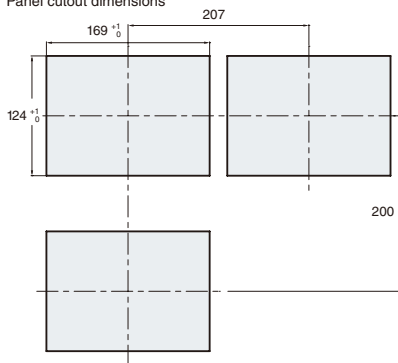


OP-87610

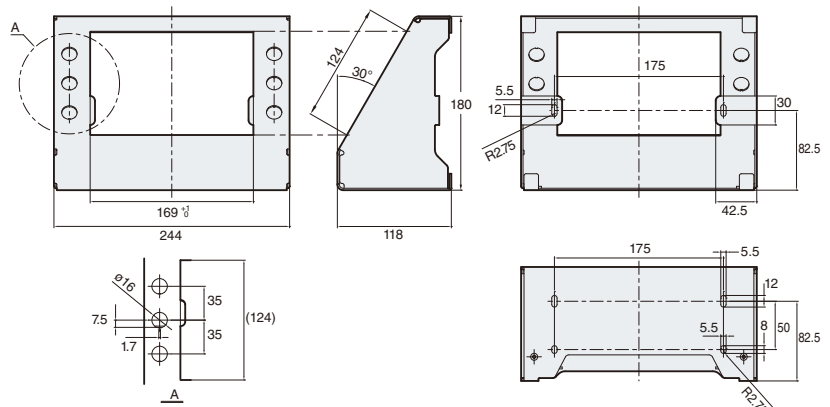


OP-87684

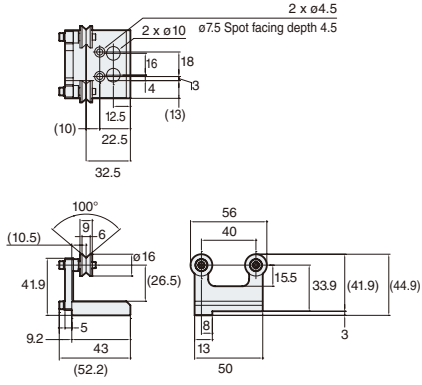


OP-87609

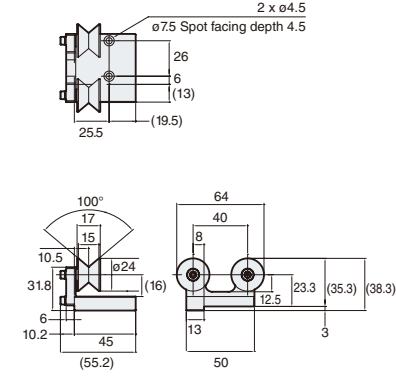


CB-B3/CB-B10




CB-B5E/CB-B10E/CB-B20E

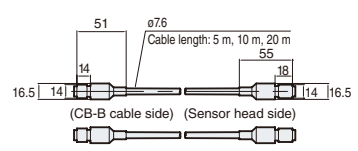


OP-87750

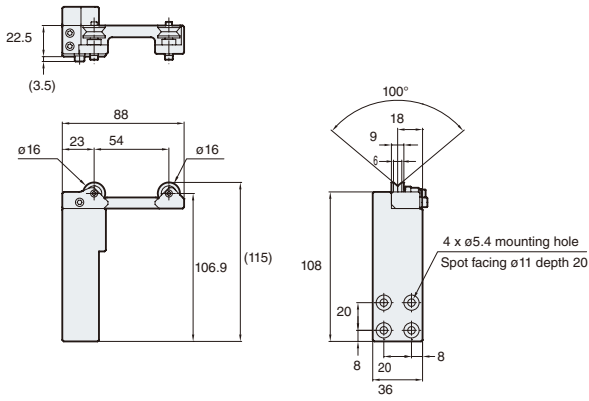





OP-87749

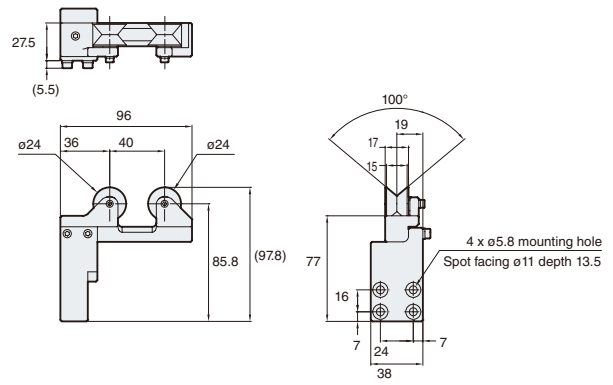

SIMULTANEOUS MEASUREMENT OF OUTER DIAMETERS AND EDGES AT MULTIPLE POINTS

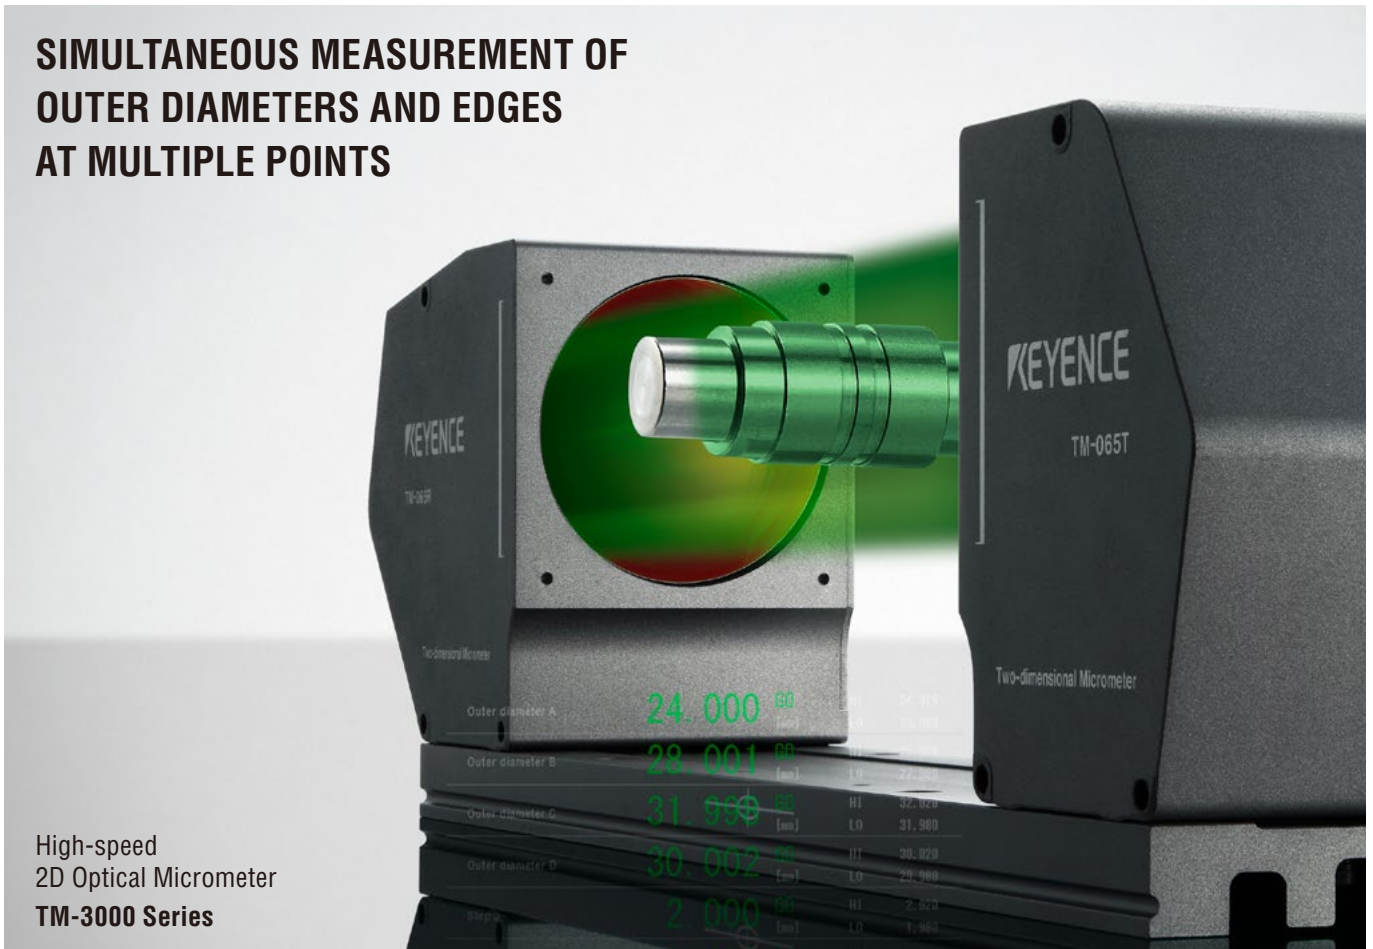

APPLICATIONS

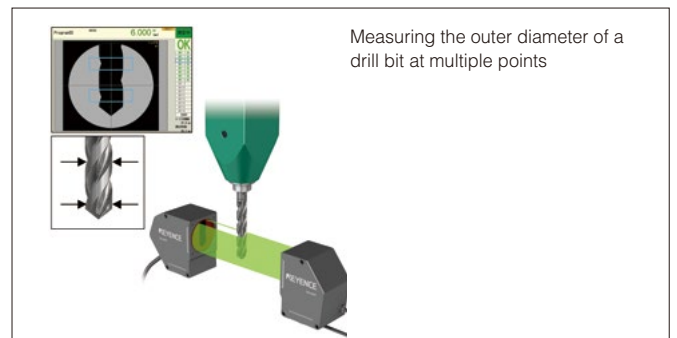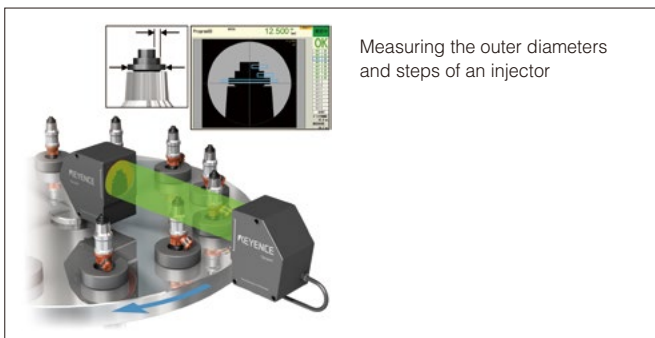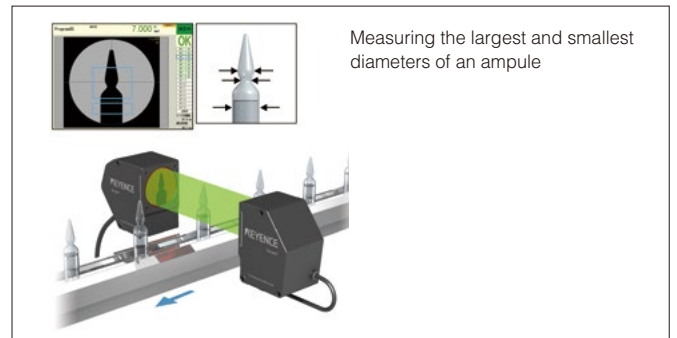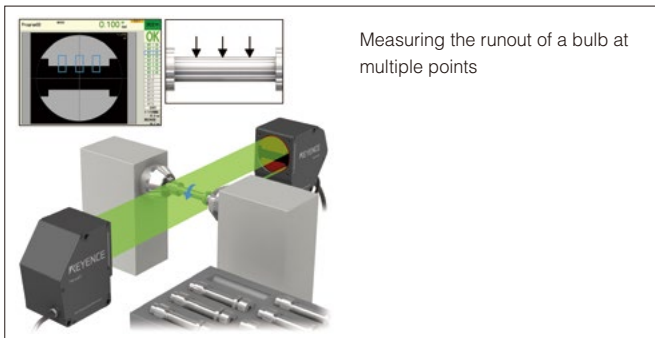

*Corporate names and brand names are the trademarks and registered trademarks of the companies.

DISPLACEMENT METER/DIMENSION MEASUREMENT SYSTEM LINEUP

Reflective-Type Measurement Instrument

**High-Speed, High-Accuracy
CMOS Laser Displacement Sensor**
LK-G5000 Series

HIGH-SPEED

WIDE RANGE

12 SENSOR HEADS CONNECTION



High-speed 2D/3D Laser Scanner
LJ-V7000 Series

2D/3D

MULTI POINT

HIGH-SPEED

PROFILES



**Surface Scanning Laser Confocal
Displacement Meter**
LT-9000 Series

HIGH-ACCURACY

DOUBLE-SCANNING

CLEAR TARGET THICKNESS



Thrubeam-Type Measurement Instrument

High-speed Optical Micrometer
LS-9000 Series

GREEN LED

LONG LIFE

HIGH-ACCURACY

HIGH-SPEED



High-speed 2D Measurement Sensor
TM Series

2D

MULTI POINT



Please visit: www.keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

GLOBAL NETWORK

CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

AUSTRIA
Phone: +43 2236 378266 0

BELGIUM
Phone: +32 15 281 222

BRAZIL
Phone: +55-11-3045-4011

CANADA
Phone: +1-905-366-7655

CHINA
Phone: +86-21-5058-6228

CZECH REPUBLIC
Phone: +420 220 184 700

FRANCE
Phone: +33-1-56-37-78-00

GERMANY
Phone: +49-6102-3689-0

HONG KONG
Phone: +852-3104-1010

HUNGARY
Phone: +36 1 802 73 60

INDIA
Phone: +91-44-4963-0900

INDONESIA
Phone: +62-21-2966-0120

ITALY
Phone: +39-02-6688220

JAPAN
Phone: +81-6-6379-2211

KOREA
Phone: +82-31-789-4300

MALAYSIA
Phone: +60-3-7883-2211

MEXICO
Phone: +52-55-8850-0100

NETHERLANDS
Phone: +31 40 20 66 100

PHILIPPINES
Phone: +63-2-981-5000

POLAND
Phone: +48 71 36861 60

ROMANIA
Phone: +40 269 232 808

SINGAPORE
Phone: +65-6392-1011

SLOVAKIA
Phone: +421 2 5939 6461

SLOVENIA
Phone: +386 1 4701 666

SWITZERLAND
Phone: +41 43 455 77 30

TAIWAN
Phone: +886-2-2721-8080

THAILAND
Phone: +66-2-369-2777

UK & IRELAND
Phone: +44 1908-696-900

USA
Phone: +1-201-930-0100

VIETNAM
Phone: +84-24-3772-5555