




HEKLA WAT73

INSULATED DOOR & WINDOW SYSTEM
YALITIMLI KAPI & PENCERE SİSTEMİ

Hekla WAT73 with 34 mm heat barrier performs at the highest level with its superior insulated structure, increased static values, energy efficiency and durability. It is designed according to the Eurogrove channel structure with different profile options. WAT73; It allows the use of triple glazing, PVC accessory applications and can be used in a wide variety of applications with all other opening accessories. With its highly durable profile structure, it enables the production of large size and weight structures such as door-window and lobby entrances for modern buildings.

34 mm ısı bariyerine sahip Hekla WAT73; üstün yalıtımlı yapısı, artırılmış statik değerleri, enerji verimliliği ve dayanıklılığı ile en üst düzeyde performans gösterir. Farklı profil seçenekleri ile Eurogrove kanal yapısına göre tasarlanmıştır. WAT73; üçlü cam kullanımına, PVC aksesuar uygulamalarına olanak sunar ve diğer tüm açma aksesuarları ile çok çeşitli uygulamalarda kullanılabilir. Yüksek dayanıklılığa sahip profil yapısı sayesinde modern binalar için kapı-pencere ve lobi girişleri gibi büyük ebat ve ağırlıktaki yapıların üretilmesini sağlar.

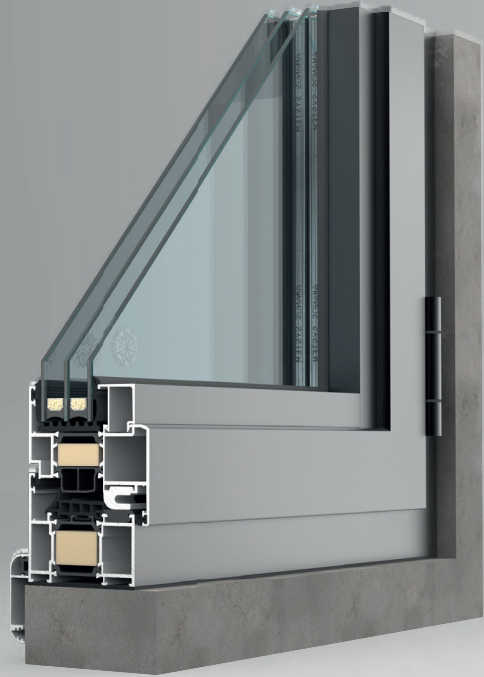

HEKLA WAT73

INSULATED DOOR & WINDOW SYSTEM
YALITIMLI KAPI & PENCERE SİSTEMİ



Frame Profile External Height	50 mm
Vent Profile External Width	74 mm
Vent Profile Minimum Width	37 mm
Vent Profile Maximum Width	67 mm
Glazing Range (With single and double glass options)	
Minimum Glass Thickness	4 mm
Maximum Glass Thickness	44 mm
Profile Wall Thickness	
Minimum Profile Wall Thickness	1,6 mm
Maximum Profile Wall Thickness	2 mm
Glazing Method	✓
EPDM Gasket	

