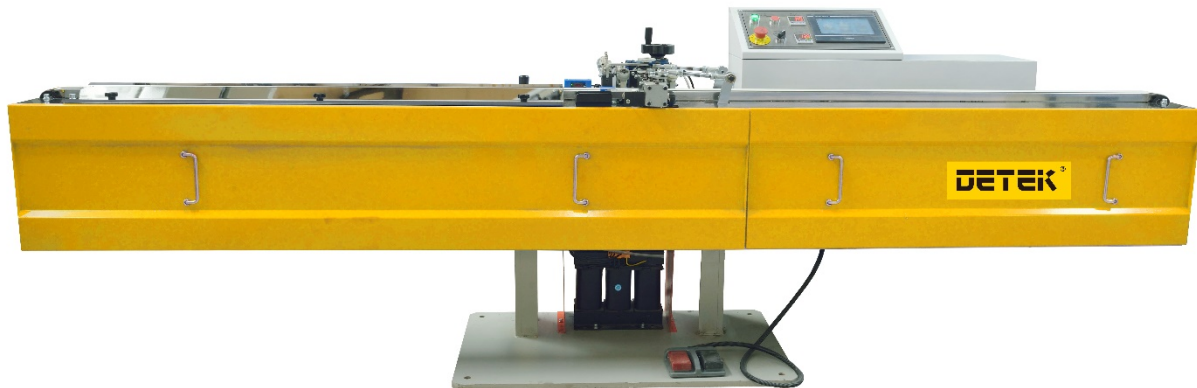


## Butyl extruder machine JT05

**Application**

JT05 butyl extruder machine is used to apply the primary butyl sealant to the aluminum spacers of insulating glass units. The use of large electrical control panel makes the operation easier.

**Feature**

1. Pneumatic system pump are famous brand imported from Germany
2. Touching screen interface, easy operation
3. Frequency inverter conveyor system, speed adjustable from 15-30m/min.
4. Auto butyl nozzle distance adjustable from 6mm to 24mm.
5. Sealant cylinder adopts rotate structure, easy for butyl sealant load and maintenance.
6. Pre-heating system, increase the production efficiency by pre-heating time setting.
7. Advanced device guarantees the best spreading effect on the arc aluminum frame.
8. Auto butyl alarm system, alarm when there is no butyl inside the butyl tank.
9. Butyl sealant cylinder volume is 14KG


**Parameter**

Total power	3P 380V 50HZ 1.45KW
Butyl pressure	15-20Mpa
Butyl temperature	110-140℃
Conveyor speed	15-30 m/min
Air pressure	0.5-0.8 Mpa
Air consumption	0.4m <sup>3</sup> /min
Aluminum spacer width	6-24mm
Butyl cylinder diameter	200mm
Dimension	3000mm×620mm×1102mm
Weight	500Kg

**Brand parts list**

Name	Brand	Country
Pneumatic pump	MAXIMATOR	Germany

Sensor	Omron	Japan
Proximity switch	Omron	Japan
Temperature controller	Omron	Japan
Breaker	Schneider	French
Contactor	Schneider	French
Relay	Schneider	French
Indicator	Schneider	French
Knob	Schneider	French
Touching screen	Kinco	China
PLC	Kinco	China
Solenoid	Airtag	TAIWAN
Air cylinder	Airtag	TAIWAN
Inverter	Airtag	TAIWAN
Power supply	MW	TAIWAN

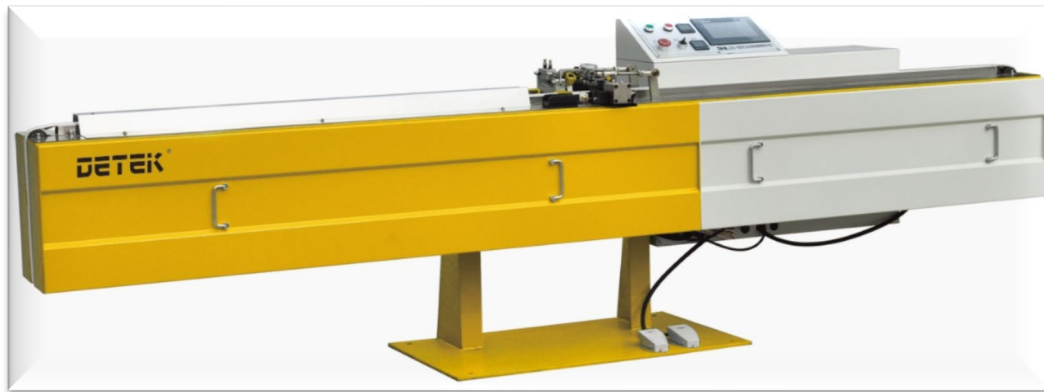**Butyl extruder machine JT01****Application**

JT01 butyl extruder machine is used to apply the primary butyl sealant to the aluminum spacers of insulating glass units. The use of large electrical control panel makes the operation easier.

**Feature**

1. Advanced pneumatic and hydraulic super-charging system ensure the stability and energy saving.
2. PLC control, touching screen, easy operation.
3. Auto butyl nozzle distance adjustable from 6mm to 20mm.
4. Sealant cylinder adopts rotate structure, easy for butyl sealant load and maintenance.
5. Pre-heating system, increase the production efficiency by pre-heating time setting.
6. Advanced device guarantees the best spreading effect on the arc aluminum frame.
7. No butyl alarm system

**Parameter**

Total power	3P 380V 50HZ 2.6 KW
Butyl pressure	10-15Mpa
Butyl temperature	110-160℃
Conveyor speed	21 m/min
Air pressure	0.5-0.8 Mpa
Air consumption	0.4m <sup>3</sup> /min
Aluminum spacer width	6-20mm
Butyl cylinder diameter	190mm
Dimension	3000mm×650mm×1000mm
Weight	490Kg

**Brand parts list**

Name	Brand	Country
Sensor	Omron	Japan

Proximity switch	Omron	Japan
Temperature controller	Omron	Japan
Breaker	Schneider	French
Contactator	Schneider	French
Relay	Schneider	French
Indicator	Schneider	French
Knob	Schneider	French
Touching screen	Kinco	China
PLC	Kinco	China
Solenoid	Airtag	TAIWAN
Air cylinder	Airtag	TAIWAN
Inverter	Airtag	TAIWAN
Power supply	MW	TAIWAN