





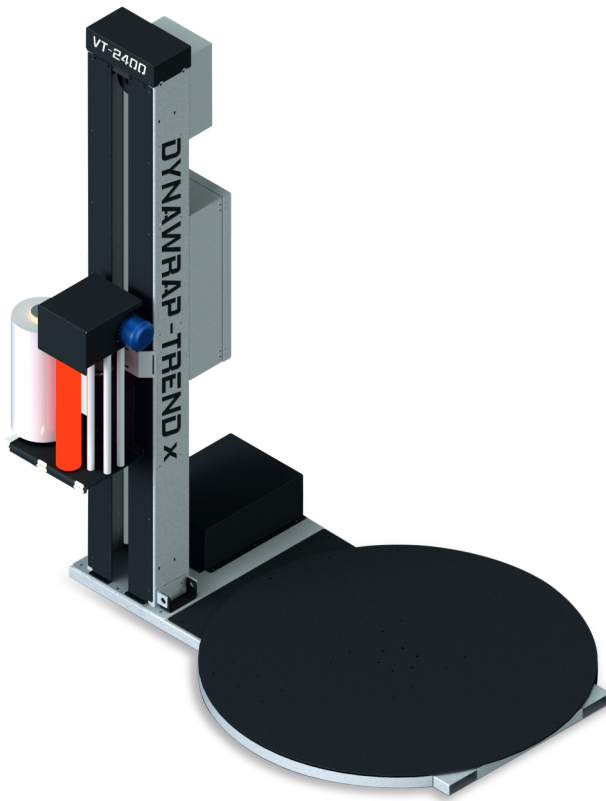

TREND X "Elevate Efficiency with Vertical Pallet Wrapping Excellence"


Standart Machine Includes:



- 
 Mechanical Tensioning

- 
 Photocell Sensor

- 
 Simple Assembling

- 
 Stretch Roture Warning System

MACHINE TECHNICAL SPECIFICATIONS

Wrapping Programs	Operating Panel 6 Programs
Turntable Diameters	1500 / 1650 / 1800
Max. Loading Weight (kg)	1500 (STD) / 2000 (OPT)
Wrapping Height	2200 / 2400 / 2700 / 3000
Spool Carriage Speed	1,3 up to 5,4 m/min
Voltage	230V-1Ph-50/60Hz
Turntable Rotation Speed	5-12 rpm
Output Capacity	25 Pallets/Hour*
Turning Diameter	1700 mm

*Depends on the Film Quality and Loading Supply



STRETCH FILM TENSIONING

Mechanical Tensioning	
Motorised Power Pre Stretch**	150 - 300%
Tensioning depends on Stretch Quality and Elongation	

RECOMMENDED STRETCH FILM

Max. Weight	20 kg
Thickness (Micron)	8-30

CUSTOMISE YOUR MACHINE WITH:

- 
 Wifi/Mobile Access
- 
 Barcode Program & Printer
- 
 Loading Ramp