


## AGRICULTURAL LEVEL BLADE, MOUNTED.

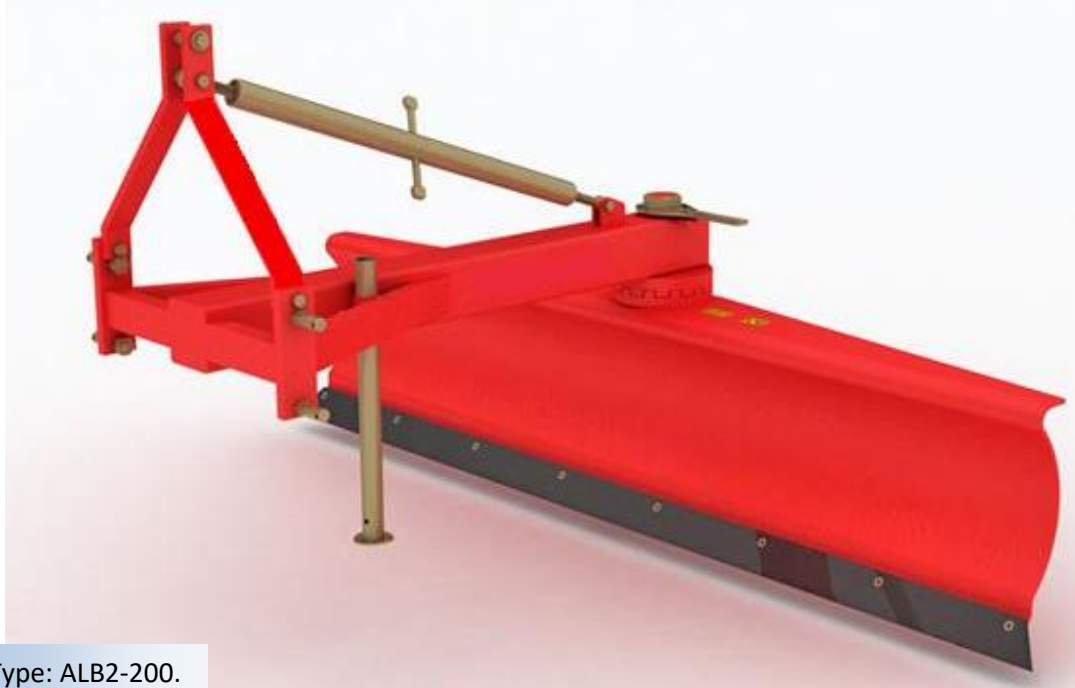

Type: ALB2-200.

SPECIFICATIONS				
TYPE	BLADE THICKNESS	WORKING WIDTH	WEIGHT	POWER REQUIRED
ALB2-200	6	200 cm	200 Kg	30-60 HP
ALB2-220	6	220 cm	220 Kg	30-60 HP
ALB2-240	8	240 cm	290 Kg	30-60 HP
ALB2-250	10	250 cm	370 Kg	40-90 HP
ALB2-300	10	300 cm	440 Kg	40-90 HP

COMMON SPECIFICATIONS	
SHOVEL HEIGHT	45 cm
OVERALL HEIGHT	110 cm
TRACTOR 3-POINT HITCH COMPATIBILITY	Category 1S and/or Category 2

We reserve the right to change any information on this brochure without prior notice.

ANIZ Tarım Endüstri İc ve Dis Ticaret Ltd.  
Musallabagları, Cakırlı Caddesi 56  
42110 Selçuklu  
Konya, Turkey

Phone|WhatsApp +90 (332) 236 0578  
Fax +90 (332) 236 7905  
<http://www.aniztarim.com.tr>  
[info@aniztarim.com.tr](mailto:info@aniztarim.com.tr)

## AGRICULTURAL LEVEL BLADE, MOUNTED.



Type: ALB2-200.

Tractors fitted with hydraulic lift, operate the mounted agricultural level blade. The ANIZ ALB2 series Agricultural Level Blades offer easy to use features like 360° blade angle by teethed turn table and are an excellent choice for leveling, finish grading and backfilling applications at feedlots, outdoor arenas, building sites, nurseries, and maintenance operations on farms, ranches, or home owner lanes, and roadways.

They are also excellent for snow removal in pulling or push blade mode.

Their easy alignable capability make them an excellent choice for construction and maintenance of drainage ditches, waterways, soil contours, and for maintaining silage pit operations.

Our level blades are built for years of trouble-free work with a minimum amount of maintenance.

We believe it will meet expectations of both you and your customers.

If you interest please do not hesitate to contact to us: [info@aniztarim.com.tr](mailto:info@aniztarim.com.tr)