

SUBSOILERS



ALFAST

Alpego Fast System



Interchangeability

Quick, easy accessory changes


Alpego has always offered different accessories for different technical and farming solutions. With the ALFAST system, machines can be customised for all working conditions in just a few minutes, by replacing the standard ploughshare or shank guard with other accessories.

LOCKED




Reinforced shanks and ploughshares with exclusive ALFAST system

Alpego introduces an innovative ultra-fast ploughshare and accessory replacement system. With ALFAST, all you need is a hammer. No need to remove pins or screws. The patented system consists of a clip which moves to free or lock the accessory on the shank.



RELEASED

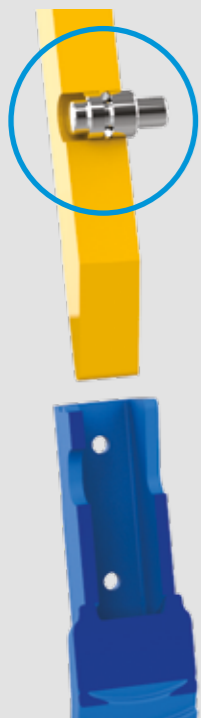

RELEASE



LOCK



WHAT YOU NEED:



x 1



15"




x 1




NO

STANDARD

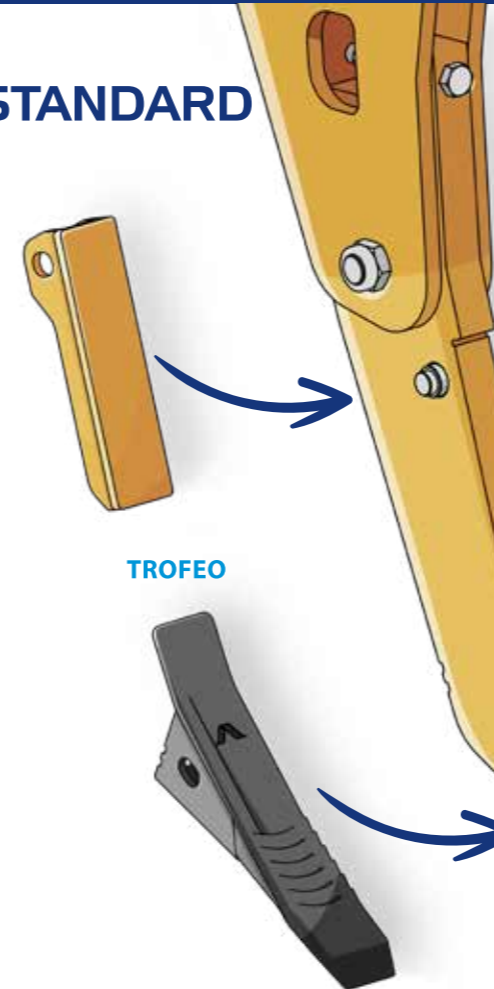

OPTIONAL

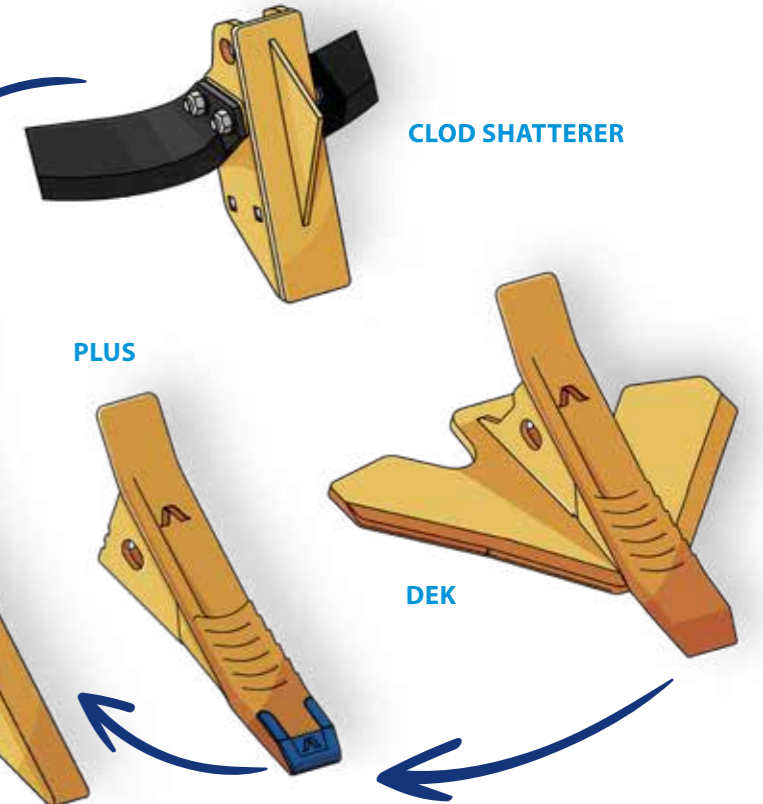


TROFEO

PLUS

DEK

The advantages of the new ALFAST DEK system

The new DEK system consists of the TROFEO DEK ploughshare coupled to the DEK fin.

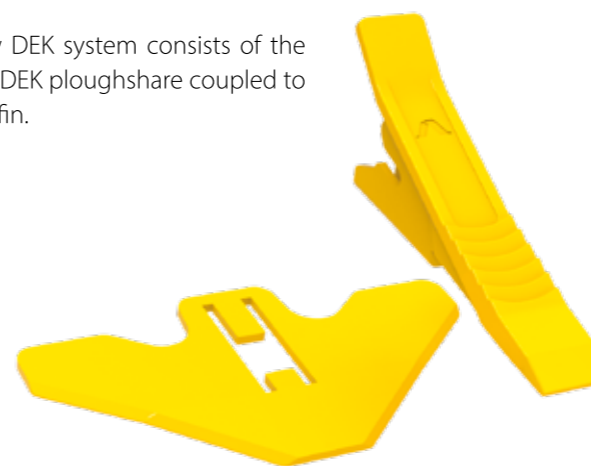

The coupled or single use of the two elements allows the operator to change operations in real time.



The advantage of this modular system is that the two elements can be reset separately.


CRAKER K-FORCE

TOP OF THE RANGE

Rigid mechanical subsoiler
for depths up to 65 cm

K-FORCE model subsoiler is intended for super-professional use, and is complete with ALFAST system and hydraulically adjusted roller as standard. Available in sizes 3-3.5-4m, recommended for tractors from 180 to 350 HP.

Mechanical subsoiler
K-FORCE

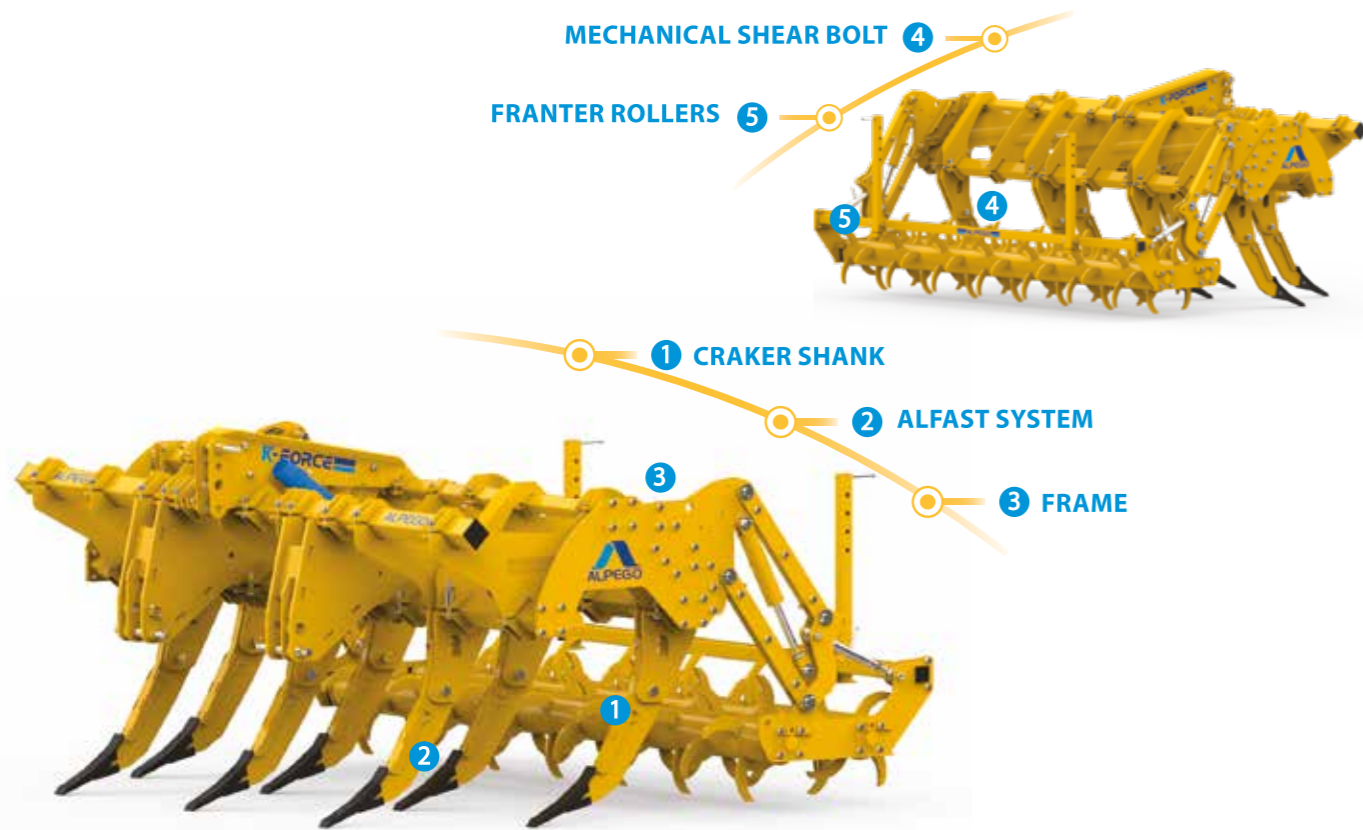

Model	CRAKER K-FORCE 7-300	CRAKER K-FORCE 7-350	CRAKER K-FORCE 9-400
Working width (mm)	3000	3500	4000
Transport width (mm)	3002	3495	3996
Tractor power (HP)	180-350	180-350	205-350
Working depth (mm)	650	650	650
Shanks (no.)	7	7	9
Weight with hydraulic Franter roller H22 (Kg)	2140	2290	2660
Weight with hydraulic Franter roller H50 (Kg)	2275	2415	2780
Weight with Cage Roller G6 (Kg)	2085	2135	-
Weight with Disc Roller DR6 (Kg)	2390	2520	-

1 CRAKER SHANK

Shank 35 mm thick with curved profile to reduce draft force and improve mixing both in-depth on the surface.

2 ALFAST SYSTEM

TROFEO forged ploughshares and shank guards with ultra rapid fitting and removal system.

3 FRAME

All-bolted frame in high strength steel with new design for higher performances.

4 MECHANICAL SHEAR BOLT

Safety bolt fitted on every shank; if the shank hits an obstacle, the bolt shears, protecting the machine's structure.

5 FRANTER ROLLERS

H22 FRANTER rollers (Ø 220 mm) Choice of two-point linkage (forward/rear) Optionals: Modular parallelogram kit.

EQUIPMENT

Linkage cat. 3, 4N, 3 USA and 4 USA / Diagonal shank fixing / Clamp shock absorber on all shanks / Two support legs (mounted on roller).



FOLDABLE POWER HARROWS

120 - 500 HP



RIGID POWER HARROWS

35 - 320 HP



SUBSOILERS

75 - 500 HP



ROTARY TILLERS AND STONE BURIERS

75 - 500 HP



SEED DRILLS

75 - 320 HP



FRONT HOPPERS

120 - 500 HP



CULTIVATORS

120 - 300 HP



FLAIL MOWERS

40-220 HP

