



- info@recap.com.tr
- +90 222 246 03 33
- Recap Makina Sanayi ve Ticaret Limited Şirketi

Autoclaves


Heating Type

- Electrical
- Indirect Steam
- Indirect Hot Oil
- Indirect Gas Burning

Composite



Working Pressure	7 Bar - 70 Bar
Working Temperature	200°C - 400°C
Usable Diameter	650 mm - 4,000 mm
Usable Length	Up to 20 Meters
Software	PLC & Scada System
Locking System	3 Ring Door Mechanism

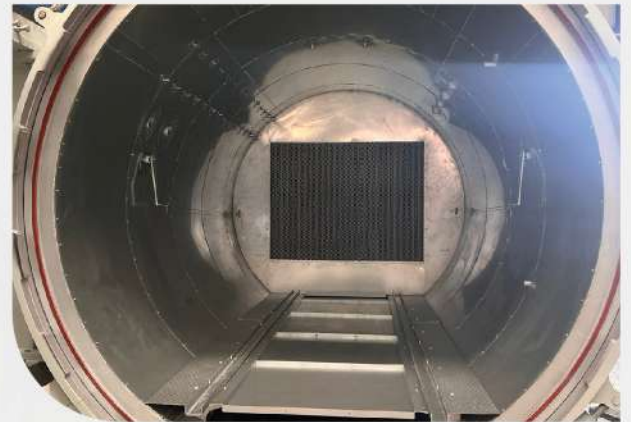

Quality
Standards







UK
CA



EN ISO 3834-2
CERTIFIED



User Interface & Graphics

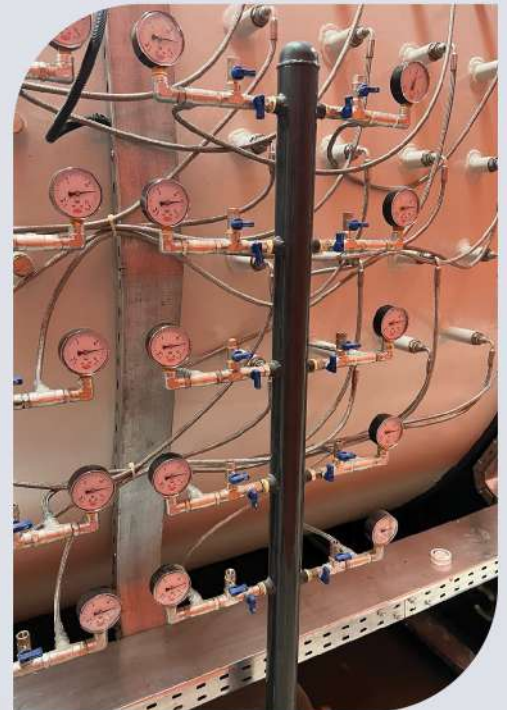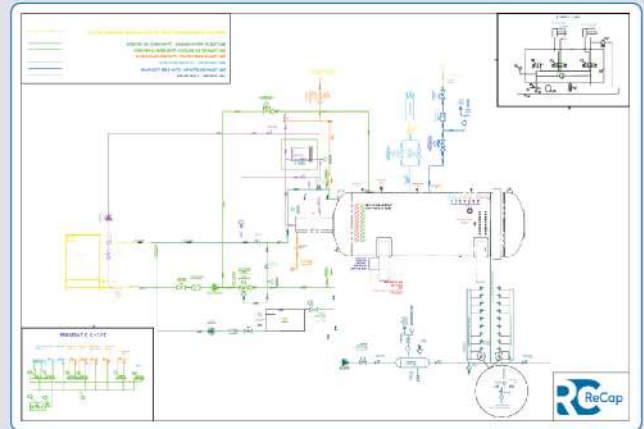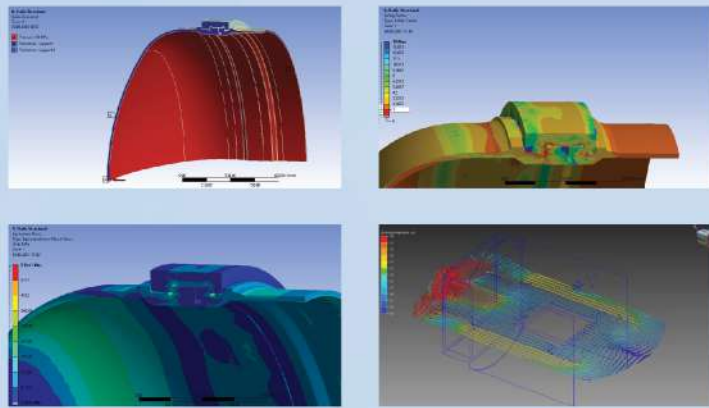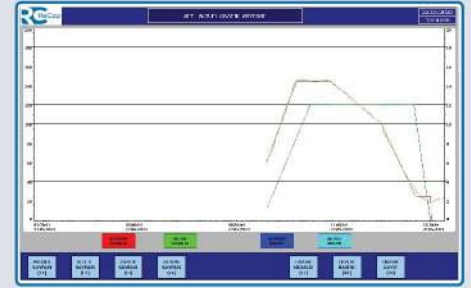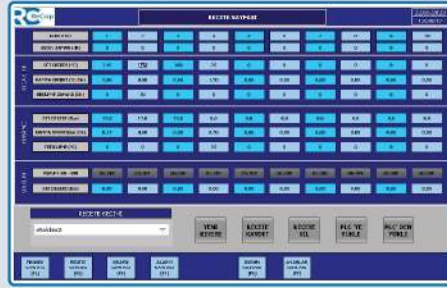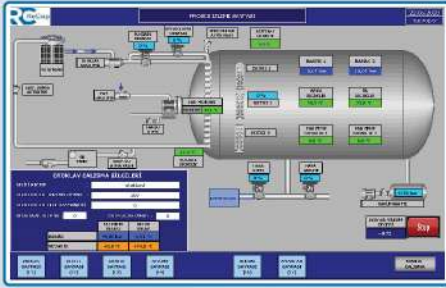

Heating Type

- Electrical
- Indirect Hot Oil
- Indirect Steam
- Indirect Gas Burning

Glass Lamination



Autoclave Size [mm]

Glass Size [mm]

ID2000x3500	1500x2500
ID2000x6000	1500x5000
ID2600x4000	2100x3000
ID2600x6000	2100x5000
ID3000x5000	2600x4000
ID3000x6000	2600x5000
ID3000x8000	2600x7000
ID3300x7000	2800x6000
ID3300x8500	2800x7000
ID3300x9500	2800x8000
ID3900x7500	3210x6000
ID3900x9500	3210x6000
ID4000x7500	3300x6000

Working Pressure

14 Bar

Working Temperature

150°C

Max Working Pressure	15 Bar
Max Working Temperature	210°C
Usable Diameter	900 - 4000 mm
Usable Length	Up to 60 Meters



Rubber




Heating Type

- Electrical Heating
- Direct Steam Heating



Scan the QR code to watch videos of the autoclaves we produce

Manufacturing state of art retreading autoclaves for OTR and TBR Tyres. The heating system is electrical, direct steam and direct steam depending on the process requirements.

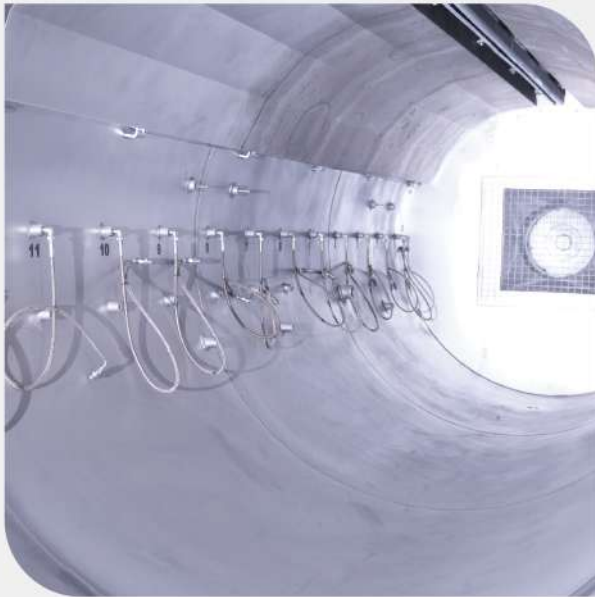

Code	Capacity	Heating	Power [Kw]	Weight [Kg]
RC812	12 Tyres	Electrical [Steam Optional]	70	4,800
RC816	16 Tyres	Electrical [Steam Optional]	70	5,500
RC820	20 Tyres	Electrical [Steam Optional]	100	6,300
RC824	24 Tyres	Electrical [Steam Optional]	100	7,200

