


INFUSION PUMP

DPfusion VP3

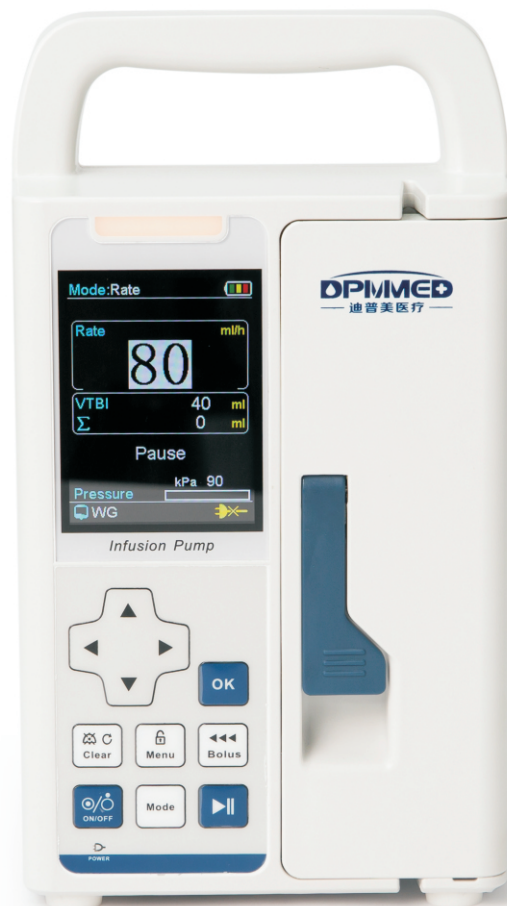

Features

- Manual /Automatic Bolus.
- Vertical & Horizontal mounting clamp.
- Anti-bolus system.
- DPS dynamic pressure display.
- 2000 events stored can be checked and downloaded.
- Large color TFT display with adjustable brightness

Deepmed Medical Technology Co., Ltd.

Add: Room 709-717, Building 1, Haiping Park, No.229,
Guyuan Road, Hi-tech Zone, Changsha 410205, China

ISO13485:2003/ISO9001:2008/CE certificate

Tel: 86-731-85532635 Email: info@dpmmed.com

Web: www.dpmmed.com

Specifications(DPfusion VP1/VP3)

PARAMETER	SPECIFICATION
Fit IV tubes	Can be used with any brand IV set after exactly calibration
Accuracy	±2%
Delivery rate range	0.1-1500ml/h
Delivery time range	00h01min ~ 99h59min (1 min step)
Volume limit range	0.0-9999ml (1 ml step)
Total Volume Range	0.0-9999ml (1 ml step)
Dose Mode	Volume:0.1-999.9ml(0.1ml step) DRUG MASS:0.1-999.9mg (0.1mg step) DOSE:0.001-9999ug/kg/min(0.001ug/kg/min step) WEIGHT:0.1-300kg(0.1kg the least step)
Drug library Mode	Available
Sequential mode	Available
KVO Rate	0.0~5.0ml/h. Programmable and adjust able
DPS Occlusion Pressure	24 levels setting: 30~160kPa
Alarms	Rate Abnormal , Door Open , Air-in-line , Occlusion , Bottle Empty , Battery Empty, No Battery, Key Holding During Infusion/Pause, Infusion Complete, No Action, Battery Low
Alarm volume	Three levels: LOW, MEDIUM or HIGH
Bolus function	Bolus rate:1.0~1200ml/h, Bolus volume:1.0~100ml Automatic/Manual ,programmable and adjustable
Purge Rate	Programmable and adjustable
Interface	RS-232
Brightness	1~10 levels can be selected
History records	2000 events stored can be checked and downloaded
Power source	AC power supply: AC 100 to 240V(+/-10%), 50/60Hz; DC power supply: 12-15V, power>15W; Built-in Lithium Battery: Rechargeable, 7.4V,2600mAh. 8 hours of continuous operation
Protection Class	Class I, Type CF,IPX4
Dimension /N.W	120mm*100mm*215mm , 1.7kg
Packing size/G.W	250mm*190mm*155mm , 2.5kg