
a <small> addition will make a <BIG> change!

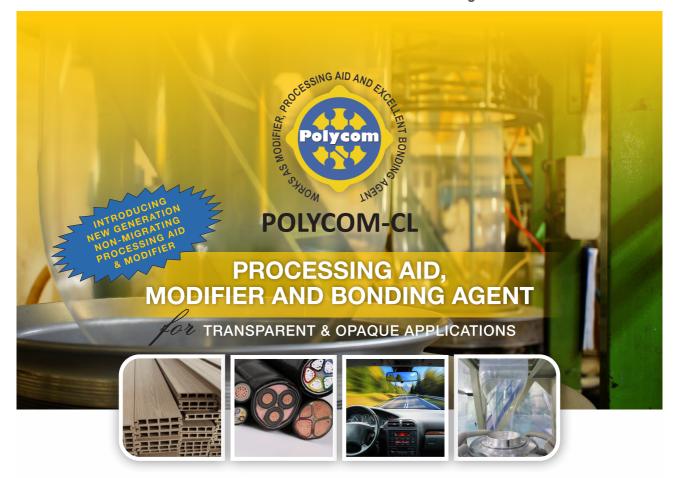

Polycom – CL is used as ■ Non – migrating processing aid and impact modifier for Polyethylene and Polypropylene extrusion and moulding applications.
Coupling agent, compatibilizer, dispersing agent for various compounds like Halogen Free Flame Retardant (HFFR) ■ Wood composites, recycle material. ■ Layer resin for various polymers. ■ Helps in extrusion coating for improving bonding between aluminium foil and Polypropylene / Polyethylene ■ Used as purging agent.

APPLICATIONS

■ Shrink films ■ PET Preforms ■ Flexible packing ■ Woven bags ■ Pipes ■ Cables ■ PP/PE glass fiber compounds ■ Wood composite ■ Halogen free flame retardant compounds ■ Recycle materials ■ Bitumin ■ Purging compound ■ Laminations ■ Tie layer resin

KEY ADVANTAGES

- Eliminates melt fracture/shark skin Imporve tensile strengh & ellongation Improve gloss Imporve rheology property ■ Reduce carbon formation in die ■ Reduce microns of films ■ Thickness variation is controlled
 - Eliminates slippage during processing Improves adhesive strength



201-203, Siddharth Annex Complex. Opp. Prasang Party Plot, Sama-Savli Road, Vadodara- 390 008. Gujarat. India. Phone: 0265-2710943

E-mail: sales@omegaplasto.com

SKYPE: omegaplasto