

ALFA

Portable Compound Saw with Tabletop Ø 300 mm



Features

Used for cutting processes of aluminum, plastic and wooden profiles.



- Safe cutting with double spring system and saw barrier
- 0°, 15°, 22.5°, 30°, 45° right and left angle fixing
- Cutting at any desired angle between -45° and +45°
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lowerplate is at 0° (Zero) position)

Standard Equipment

- Screw workpiece clamp

Optional Equipment

- Ø 300 mm saw blade
- Second clamp
- Conveyor
- Stand
- Brake System
- Three-phase system
- Profile gauge

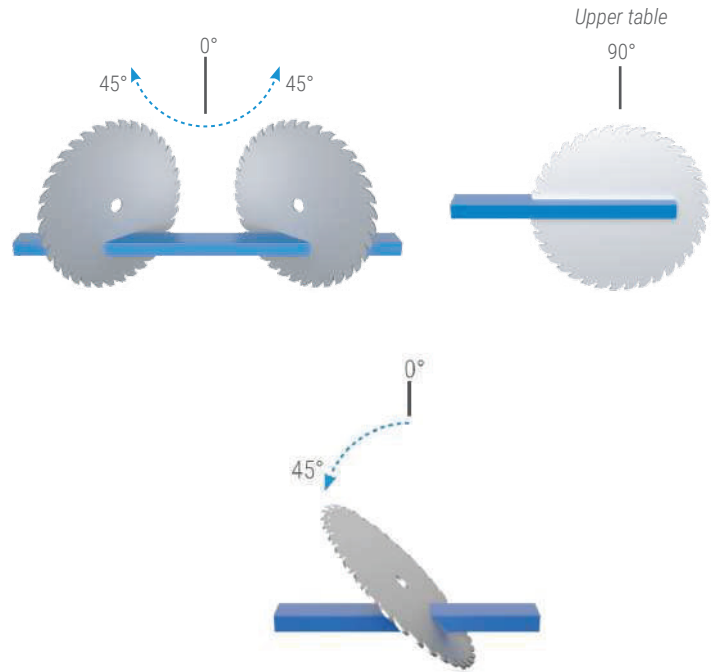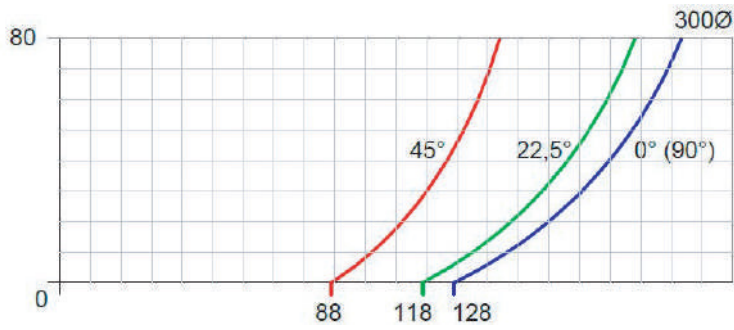

HP kW	n r.p.m	Hz	I (230 V) A	∅ D mm	∅ d mm	s mm	n r.p.m	c mm	h mm	l x w x h (mm) kg	45° a x b mm
1,5 1,1	3000 r.p.m	50 60	5 A	300 mm	30-32 mm	3,2 mm	3000 r.p.m	165 mm	40 mm	550 x 540 x 685 25 kg	128 X 35 mm