

Omega 1250

Roll-bag Converting

For production of bags on roll with thin gauge film in up to 6 lanes.

- Production speed up to 220 m/min
- More than 5.000 bags/min



} Omega – bags with thin gauge film }

Freezer & Fruit bags



Omega 1250

Roll-bag Converting


The Omega 1250 is perfect for high-capacity production of bags with thin gauge film, e.g. bags for fruits and vegetables or can liners. It is possible to run in up to 6 lanes, with production speed up to 220 m/min. This solution includes Roll-o-Matic's fully automated multi lane winder.

The Omega 1250 can be delivered in 4 different versions, depending on the requirements for bag length and production cycles. It is possible to start with a dedicated version and upgrade it according to your production demands. The Omega line can run in-line with an extruder or out-of-line, from an unwinder.

Technical data for Omega 1250


| | Omega 1250/6 | Omega 1250/8 | Omega Plus 1250/6 | Omega Plus 1250/8 |
|----------------------|------------------------|------------------------|------------------------|------------------------|
| Min. film thickness | 5 µm | 5 µm | 5 µm | 5 µm |
| Max. sealing width | 1250 mm (49.1 in) | 1250 mm (49.1 in) | 1250 mm (49.1 in) | 1250 mm (49.1 in) |
| Min. bag length | 250 mm (9.7 in) | 250 mm (9.7 in) | 250 mm (9.7 in) | 250 mm (9.7 in) |
| Max. bag length | 400 mm (15.6 in) | 2400 mm (94.6 in) | 400 mm (15.6 in) | 2400 mm (94.6 in) |
| Max. speed* | 220 m/min (720 ft/min) | 220 m/min (720 ft/min) | 220 m/min (720 ft/min) | 220 m/min (720 ft/min) |
| Max. cycles/min/lane | 700 | 700 | 880 | 880 |

*) Depending on film quality and thickness.

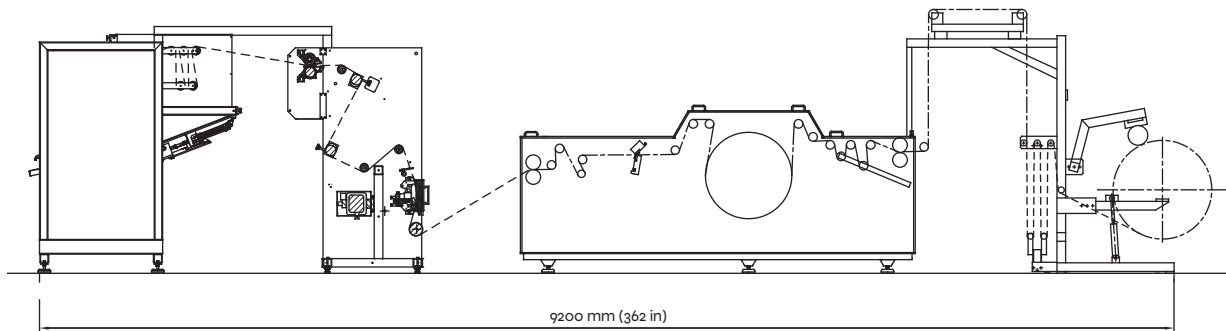


Omega 1250


Types of bags



Bottom sealed



Gusseted



Star sealed

Watch video of
Omega 1250

