



Supporter

Weight capacity: 60 kg
 Working Radius: 2500 mm
 Vertical Lift: 1600 mm
 Air consumption: 21 nl/min





Transporter

Weight capacity: 120 kg
 Working Radius: 3000 mm
 Vertical Lift: 1800 mm
 Air consumption: 50 nl/min



Magnetful


Weight capacity: 100 kg
 Working Radius: 3000 mm
 Vertical lift: 1800 mm
 Air consumption: 140 nl/min

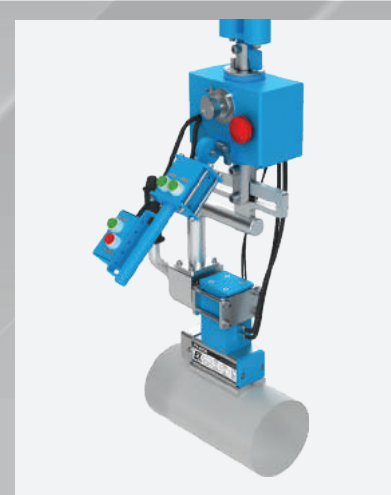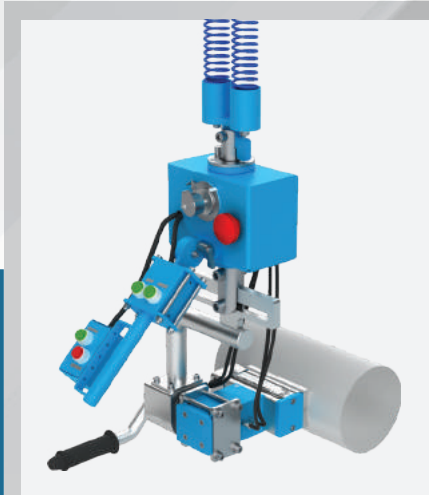



Glassfull & Panelful Vacuum Gripper

Weight capacity: 450 kg
 Working Radius: 2000 mm
 Vertical Lift: 1300 mm
 Air consumption: 140 nl/min

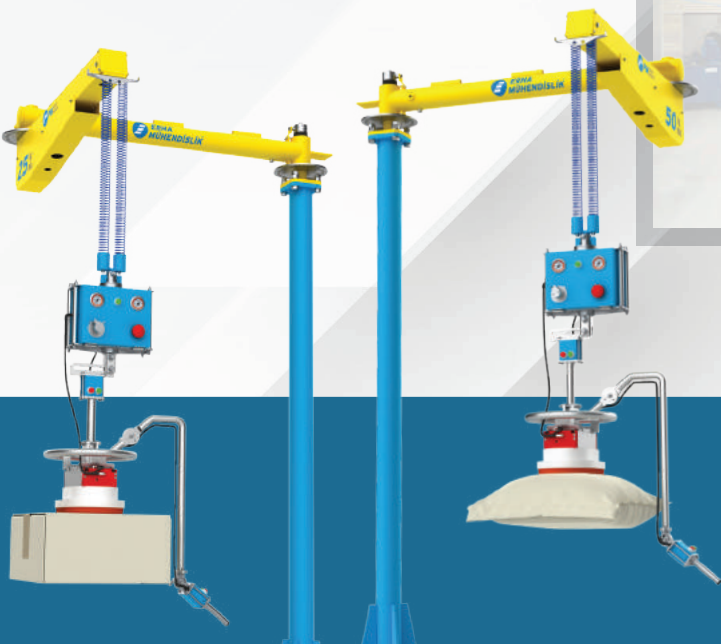

Vacful 25

Vacful 50

Weight capacity:	25 kg	50 kg
Working Radius:	3000 mm	2500 mm
Vertical Lift:	1600 mm	1600 mm
Air consumption:	21 nl/min	21 nl/min



All our products work with dry, filtered (40 µm) and oil-free compressed air.