



**ZHEJIANG NICE TAPE CO.,LTD.**



 [info@nicetape.cn](mailto:info@nicetape.cn)

 0571-89289708

 0571-89289855

 Room 509, Yanfa Building, No.528 Shunfeng Road,  
Liping District, Hangzhou, Zhejiang China







## Company profile

Zhejiang Nice Tape Co., Ltd. was established in 2009. We located in Hangzhou, near Shanghai Port and Ningbo Port. We are professional at the production of double sided tape, aluminum foil tape, BOPP tape and specialize tape. Our products are widely used in many industries like flexo printing, refrigerators, automobiles, electronics, package, constructions and so on.

We have 4 coating line with the ability to do the silicon and lamination and acrylic coating and hot melt coating; We also have more than 20 slitting line and rewinding line and cutting line and package line which could meet mostly OEM requirements.

As for sales team ,we have the experience to service professional customers like 3M, TESA, TESCO, Panasonic, Arcelik, Haier, Bunzl , AVERY DENNISON etc. You could find our products in more than 50 countries in the world, especially in Japan, USA, UAE, EU, UK, India, Latin America, Nigeria, South Africa.

Thank you for the supports from all of our customers, we look forward to establish long term business relationship with every valued customer.

## Contents


>>> Double Sided PET Tape .....	01
>>> Double Sided PE Foam Tape .....	02
>>> Double Sided Foam Plate Mounting Tape .....	03
>>> Double Sided Cloth Plate Mounting Tape .....	04
>>> Double Sided Tissue Tape .....	05
>>> Double Sided Filament Tape .....	06
>>> Special Double Sided Tape .....	07
1.D/S PVC Tape   2.D/S Acrylic Tape	
3.D/S EVA Tape   4.D/S Cloth Tape	
>>> Aluminum Foil Tape .....	09
>>> Aluminum Foil Tape Linerless .....	10
>>> Blue PET Tape .....	11
>>> MOPP Carry Handle Tape .....	12
>>> BOPP Packing Tape .....	13
>>> BOPP Printed Tape .....	14
>>> Masking Tape .....	15
>>> Kraft Tape .....	16
>>> Duct Tape .....	17
>>> PVC Warning Tape .....	18
>>> Special Single Side Tape .....	19
1.Green PET Tape   2.Bag Sealing Tape	
3.Roller Wrapping Tape   4.PVC Anti Slip Tape	
>>> Dispenser .....	21
>>> Quality Control .....	22
>>> Production Management .....	23
>>> Memo .....	24



## Double Sided PET Tape



### Structure

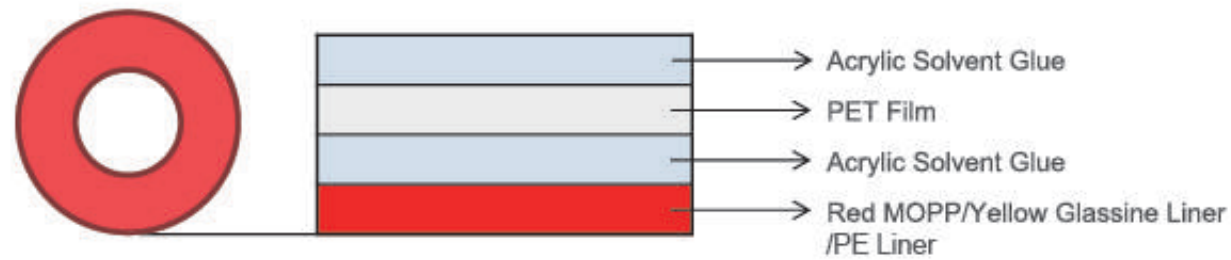

### Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (cm)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
DP205SM	PET Film	25	205	≤ 3	≥ 20	100
DP160SM	PET Film	25	160	≤ 5	≥ 20	100
DP130SM	PET Film	25	130	≤ 5	≥ 18	100

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1260mm x 500m(usable 1240mm)	6/8/10/12/15/18/24/48/50mm x 25/50/3000m

Note: Other width and length can be customized according to customer request.

### Feature

- Strong and stable adhesion
- Good low humidity resistance
- Good high temperature resistance
- Good chemical resistance

### Application


- Good for plastics parts mounting for the automobile industry, self-adhesive mounting for rubber/metal profiles sealing, decorative mounting in the furniture industry.



## Double Sided PE Foam Tape



### Structure

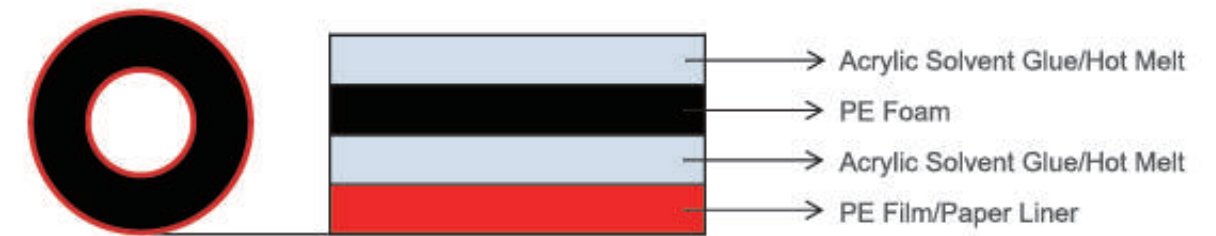

### Performance

Item	Backing	Foam Density (kgs/m³)	Total Thickness (mm)	Tack (cm)	Holding Power (hour)	Peel Adhesion (N/25mm)
DE1015S	PE Foam	67	1.0	≤ 5	≥ 24	≥ 18
DE0510S	PE Foam	100	0.5	≤ 5	≥ 24	≥ 18
DE1020H	PE Foam	50	1.0	≤ 10	≥ 24	≥ 15

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1070mm x 100/200/300m(usable 1030mm)	12/18/24/48/50mm x 5/10/15/25/1000m

Note: Other width and length can be customized according to customer request.

### Feature

- Strong and stable adhesion
- Good chemical resistance
- Good low humidity resistance

### Application

- Good for general mounting applications, suitable for automatic and manual module assembly, die-cut etc.






## Double Sided Foam Plate Mounting Tape



### Structure

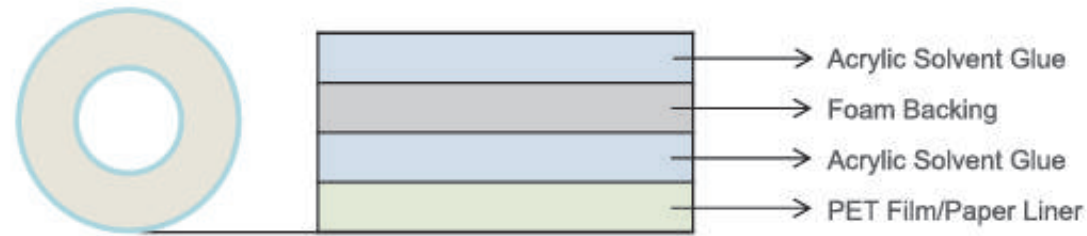

### Performance

Item	Backing	Foam Thickness (mm)	Total Thickness (mm)	Hardness
FP12015	White PE Foam	0.38	0.43	Medium Hard
FP12024	White PE Foam	0.5	0.55	Medium Hard

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
960mm x 25/50/100m(usable 940mm)	460mm x 4.5/25m

Note: Other width and length can be customized according to customer request.

### Feature


- Strong and stable adhesion
- No residue after use
- Good chemical resistance

### Application


- Specifically for mounting photopolymer plates with a thickness of 1.14 mm (0.045") or 1.70 mm (0.067") in flexographic label printing.



## Double Sided Cloth Plate Mounting Tape

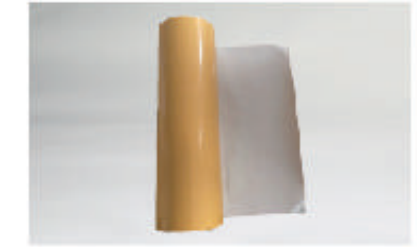

### Structure

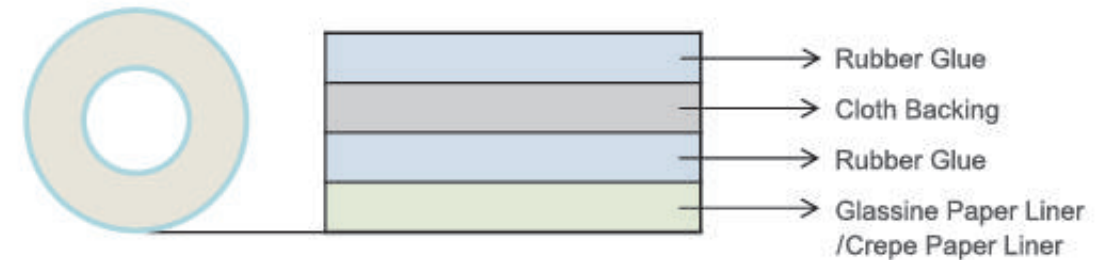

### Performance

Item	Backing	Cloth Thickness (mm)	Total Thickness (mm)	Usage (times)
FP12664	Cloth	0.2	0.38	2 to 3

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1040mm x 500m(usable 1020mm)	300/310/330mm x 4.5/20/25m

Note: Other width and length can be customized according to customer request.

### Feature

- Strong and stable adhesion
- No residue after use
- Good chemical resistance

### Application

- Specifically for mounting of photopolymer plates on polyester carrier films for corrugated board postprint.






## Double Sided Tissue Tape



### Structure

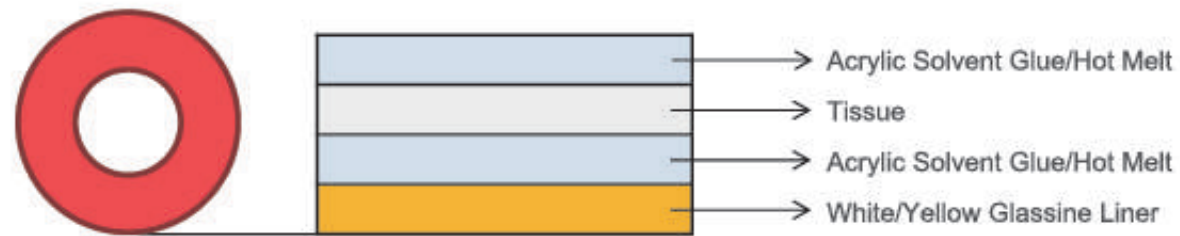

### Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (cm)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
DT090SW	Tissue	10	90	≤ 5	≥ 15	100
DT070HW	Tissue	10	70	≤ 10	≥ 10	60
DT100SY	Tissue	10	100	≤ 5	≥ 15	100

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1260/1040mm x 1000m(usable 1240/1020mm)	6/8/10/12/15/18/24/48/50mm x 25/50/500m

Note: Other width and length can be customized according to customer request.

### Feature


- Good adhesion and stable performance
- Good chemical resistance

### Application


- Good for sealing, fixing different material, widely used in automotive industry, stationery industry.



## Double Sided Filament Tape

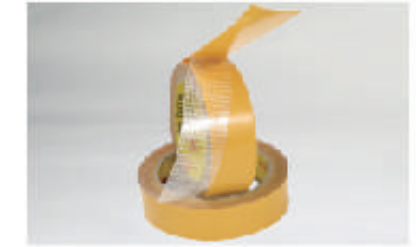

### Structure

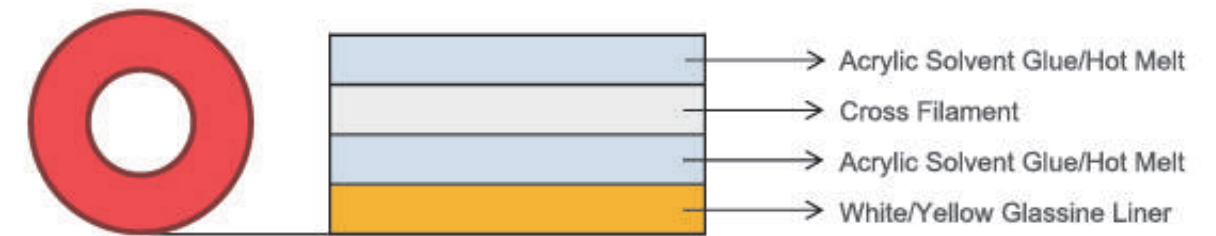

### Performance

Item	Backing	Total Thickness (mic)	Tack (cm)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
DF200SW	Cross Filament	200	≤ 5	≥ 25	120
DF155HW	Cross Filament	155	≤ 10	≥ 20	80
DF175HY	Cross Filament	175	≤ 8	≥ 20	80

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1260/1040mm x 500m(usable 1240/1020mm)	6/8/10/12/15/18/24/48/50mm x 25/50m

Note: Other width and length can be customized according to customer request.

### Feature

- Good adhesion and stable performance
- Good high temperature resistance
- High tensile strength, low elongation

### Application

- Good for sealing, fixing and filling different material, widely used in construction industry, automobile industry, EPDM etc.





## Special Double Sided Tape

### ◎ Double Sided PVC Tape




Item	Backing	Total Thickness (mic)	Backing Thickness (mic)	Tack (cm)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
DV225SY	White PVC	225	125	≤ 5	≥ 20	100
DV300SY	White PVC	300	200	≤ 5	≥ 20	100

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1260/1040mm x 500m(usable 1240/1020mm)	6/8/10/12/15/18/24/48/50mm x 25/50m

Note: Other width and length can be customized according to customer request.

### ◎ Double Sided Acrylic Foam Tape

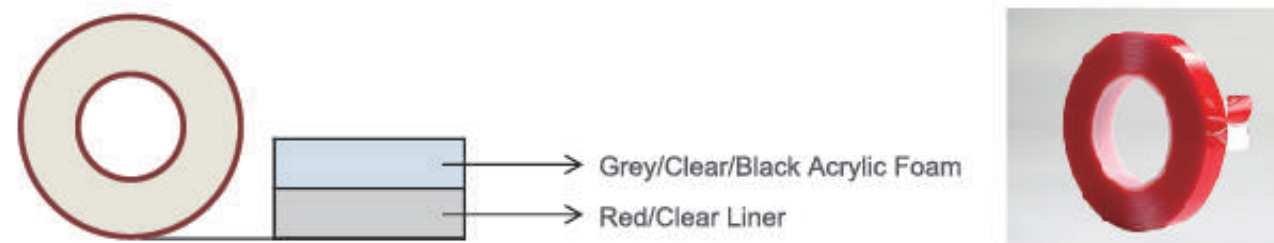

Item	Backing	Total Thickness (mm)	Peel Adhesion (N/25mm)	Elongation (%)	Temperature Resistance (°C)
VHB10R	Grey/Clear Foam	1	≥ 3	≥ 800	120
VHB05C	Grey/Clear Foam	0.5	≥ 2.5	≥ 800	120


Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
800mm x 165/330m(usable 800mm)	10/12/18/24/48/800mm x 3/5/10/33m

Note: Other width and length can be customized according to customer request.

## Special Double Sided Tape

### ◎ Double Sided EVA Tape

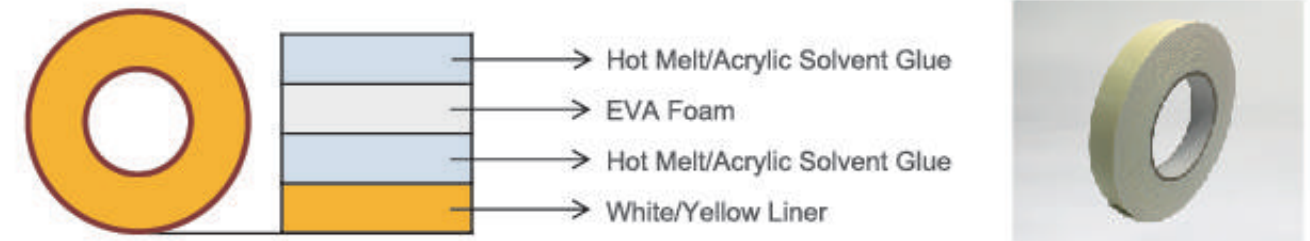


Item	Backing	Total Thickness (mm)	Hardness	Tack (cm)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
DA20HY	White EVA	2	40	≤ 10	≥ 15	60
DA10HW	White EVA	1	40	≤ 10	≥ 15	60

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1050mm x 100/200/300m(usable 1020mm)	10/12/18/24/48mm x 25m

Note: Other width and length can be customized according to customer request.

### ◎ Double Sided Cloth Tape

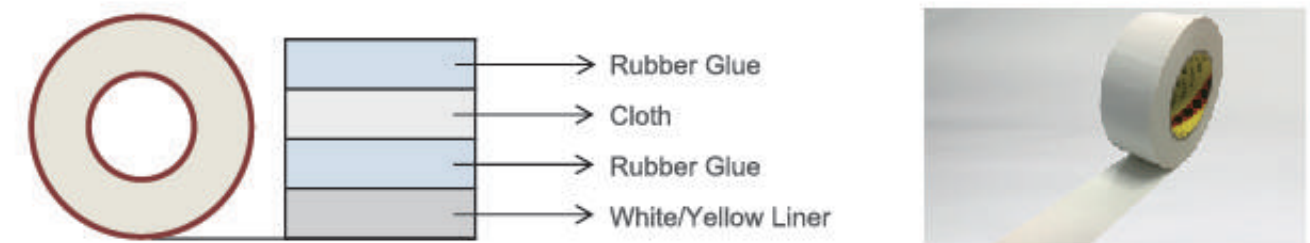

Item	Backing	Total Thickness (mic)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
DC170RY	Cloth 35 Mesh	170	≥ 20	80
DC300RY	Cloth 70 Mesh	300	≥ 20	80

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1040mm x 500m(usable 1020mm)	6/8/10/12/15/18/24/48/50mm x 25/50m


Note: Other width and length can be customized according to customer request.



# Aluminum Foil Tape



## Structure

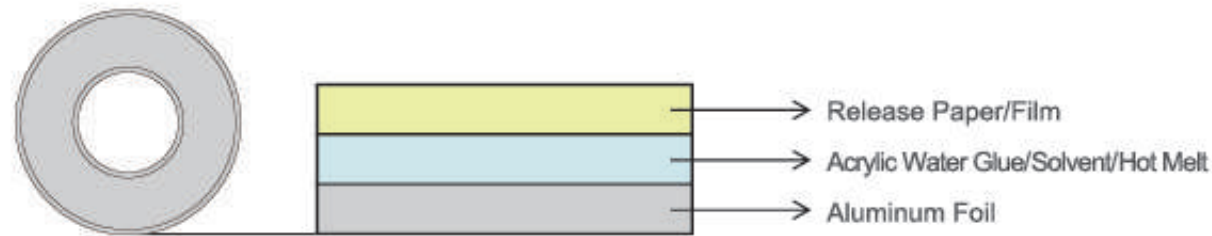

## Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (cm)	Holding Power (h)	Peel Adhesion (N/25mm)	Tensile Strength (N/25mm)	Temperature Resistance (°C)
AL2025W	Aluminum Foil	20	45	≤ 10	≥ 24	≥ 10	≥ 75	80
AL3040W	Aluminum Foil	30	70	≤ 10	≥ 24	≥ 10	≥ 75	80
AL3030S	Aluminum Foil	30	60	≤ 5	≥ 24	≥ 20	≥ 75	120

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1220/1040mm x 1000/1200m(usable 1200/1020mm)	24/38/40/45/48/50/72/100/144mm x 25/50/100m

Note: Other width and length can be customized according to customer request.

## Feature

- Excellent adhesion levels
- Easy unwind and tear
- Good chemical resistance
- High temperature resistance
- Good water resistance

## Application


- Good for sealing joints and seams of irregular metal surface, widely used in HVAC, refrigerator industry, metal patching.



# Aluminum Foil Tape Linerless



## Structure

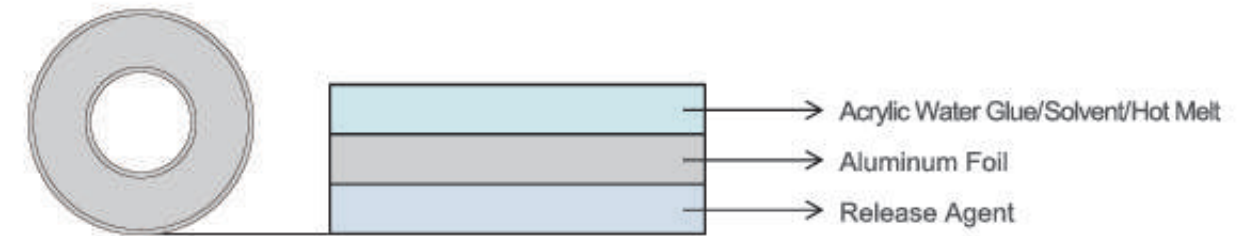

## Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (cm)	Holding Power (h)	Peel Adhesion (N/25mm)	Tensile Strength (N/25mm)	Temperature Resistance (°C)
ALC3030W	Aluminum Foil	30	60	≤ 10	≥ 24	≥ 10	≥ 75	80
ALC5040S	Aluminum Foil	50	90	≤ 5	≥ 24	≥ 20	≥ 80	120

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1220/1040mm x 1000/1200m(usable 1200/1020mm)	24/38/40/45/48/50/400mm x 25/50/200m

Note: Other width and length can be customized according to customer request.

## Feature

- Excellent adhesion levels
- Easy unwind and tear
- Good chemical resistance
- High temperature resistance
- Good water resistance


## Application

- Good for sealing joints and seams of irregular metal surface, widely used in HVAC, refrigerator industry, metal patching.





## Blue PET Tape

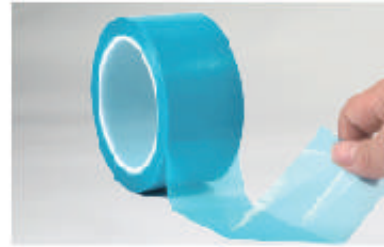

### Structure



### Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (cm)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
P2525R	PET Film	25	50	≤ 10	≥ 5	100
P3025R	PET Film	30	55	≤ 10	≥ 5	100

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1260mm x 1000m(usable 1240mm)	12/24/40/45/48/50mm x 25/50m

Note: Other width and length can be customized according to customer request.

### Feature

- Easy unwind and tear
- No residue after use
- High temperature resistance
- Good chemical resistance

### Application


- Good for sealing joints and seams of irregular metal surface, widely used in refrigerator industry.



## MOPP Carry Handle Tape



### Structure

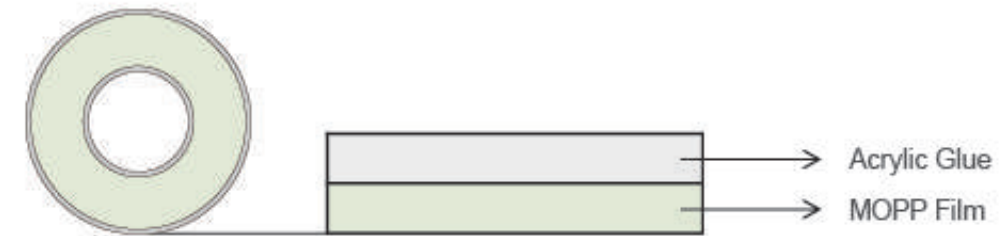

### Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Holding Power (h)	Peel Adhesion (N/25mm)
MC5025S	MOPP Film	50	75	> 24	> 6N

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
300-500 mm x 1500m	18/24/25/36mm x 1000/2000/3000m

Note: Other width and length can be customized according to customer request.

### Feature

- Excellent adhesion levels
- Comfortable feeling
- Excellent tensile strength
- Customized printing

### Application

- Good for carrying assembly package or single bottle drink or other heavy containers






## BOPP Packing Tape



### Structure

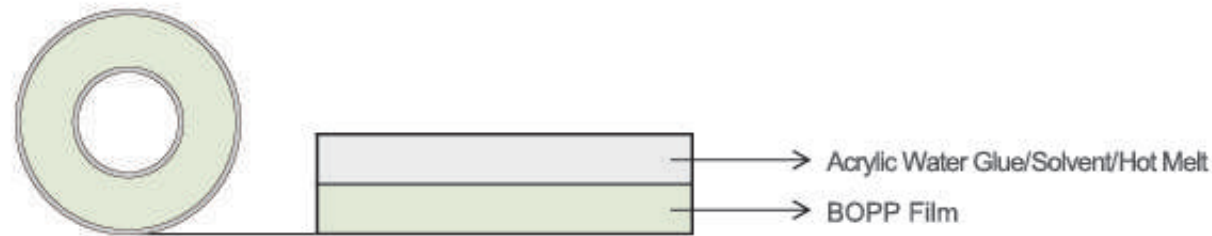

### Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (#)	Holding Power (h)	Peel Adhesion (N/25mm)	Tensile Strength (kg/cm)	Elongation (%)
O2340W	BOPP Film	23	40	≥ 14	≥ 24	≥ 5	≥ 3	130
O2548W	BOPP Film	25	48	≥ 14	≥ 24	≥ 6	≥ 3	130
O4065W	BOPP Film	40	65	≥ 14	≥ 24	≥ 8	≥ 3.5	150

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1280/1620mm x 4000/6000m(usable 1260/1600mm)	12/24/36/45/48/50/72mm x 50/66/100/200/1000/1500m

Note: Other width and length can be customized according to customer request.

### Feature

- Good adhesion, good tensile strength
- Smooth surface, light weight and environmental protection

### Application


- Widely used in general product packaging, sealing and bonding, gift packaging, etc.



## BOPP Printed Tape



### Structure

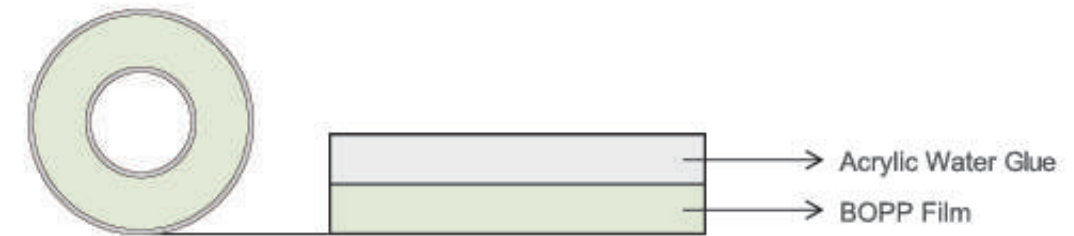

### Performance

Item	Backing	Backing Thickness (mic)	Total Thickness (mic)	Tack (#)	Holding Power (h)	Peel Adhesion (N/25mm)	Tensile Strength (kg/cm)	Elongation (%)
O2340W	BOPP Film	23	40	≥ 14	≥ 24	≥ 5	≥ 3	130
O2548W	BOPP Film	25	48	≥ 14	≥ 24	≥ 6	≥ 3	130

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1280mm x 4000m(usable 1260mm)	12/24/36/45/48/50/72mm x 50/66/100/200/1000m

Note: Other width and length can be customized according to customer request.

### Feature

- Good adhesion, good tensile strength
- Smooth surface, light weight and environmental protection


### Application

- Widely used in general product packaging, sealing and bonding, gift packaging, etc.






## Masking Tape

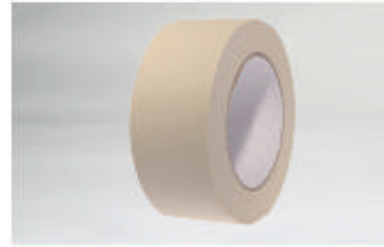

### Structure

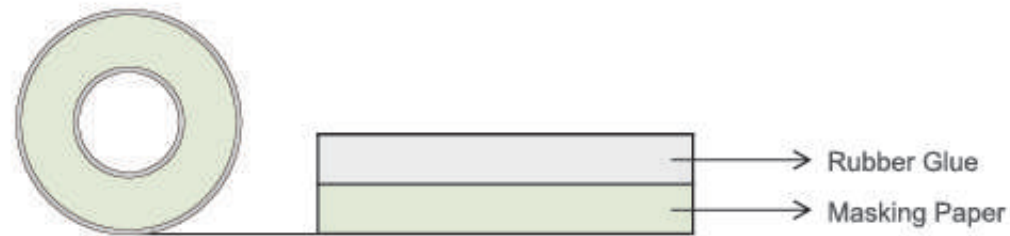

### Performance

Item	Backing	Total Thickness (mic)	Tack (#)	Peel Adhesion (N/25mm)	Tensile Strength (N/25mm)	Elongation (%)	Temperature Resistance (°C)
M130R	Masking Paper	130	≥ 6	≥ 3	≥ 60	≥ 6	60

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1280mm x 1800m(usable 1250mm)	12/24/36/45/48/50mm x 25/50m

Note: Other width and length can be customized according to customer request.

### Feature

- Stable performance
- Light weight and environmental protection
- No residue glue

### Application


- Widely used in indoor and outdoor paint masking, light duty packaging, car paint conservation and construction site.



## Kraft Tape



### Structure

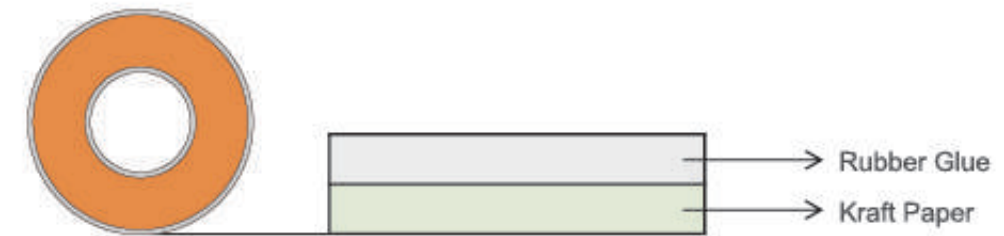

### Performance

Item	Backing	Total Thickness (mic)	Peel Adhesion (N/25mm)	Tensile Strength (kg/cm)	Elongation (%)	Holding Power (h)
K120R	Kraft Paper(non-reinforced)	120	≥ 20	≥ 110	≥ 1.5	≥ 48
KR140R	Kraft Paper(reinforced)	140	≥ 20	≥ 280	≥ 1.5	≥ 48

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1080mm x 1000m(usable 1060mm)	36/48/50/70/72mm x 50/100/132/1000m

Note: Other width and length can be customized according to customer request.

### Feature

- Good adhesion
- Environmental protection
- Good Tensile Strength

### Application

- Widely used in general product packaging, sealing and bonding etc.





## Duct Tape



### Structure



### Performance

Item	Backing		Total Thickness (mic)	Tack (#)	Peel Adhesion (N/25mm)	Tensile Strength (N/25mm)	Elongation (%)
D160R	Cloth	35 mesh	160	≥ 10	≥ 15	≥ 65	60

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1080mm x 1000m (usable 1060mm)	24/36/45/48/50mm x 25/50m

Note: Other width and length can be customized according to customer request.

### Feature

- Good adhesion, good tensile strength
- Smooth surface, light weight and environmental protection

### Application


- Good for sealing and fixing, widely used in carpet decoration, shelf fixing, heavy-duty packaging, waterproof packaging, etc.



## PVC Warning Tape



### Structure

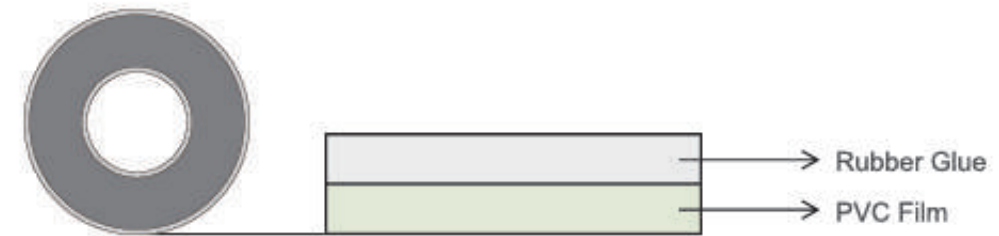

### Performance

Item	Backing	Total Thickness (mic)	Peel Adhesion (N/25mm)	Tensile Strength (kg/cm)	Elongation (%)
V130R	PVC Film	130	≥ 3	≥ 35	≥ 150
V150R	PVC Film	150	≥ 3	≥ 40	≥ 150

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1280mm x 300m (usable 1250mm)	45/48/50/72/1250mm x 33/50m

Note: Other width and length can be customized according to customer request.

### Feature

- Good adhesion, good tensile strength
- Smooth surface, light weight and environmental protection

### Application


- Widely used in warning signs, decorative stickers, the ground (wall) area is divided into areas with electrostatic sensitive product or anti-static area for identification, and etc.





## Special Single Side Tape

### Green PET Tape

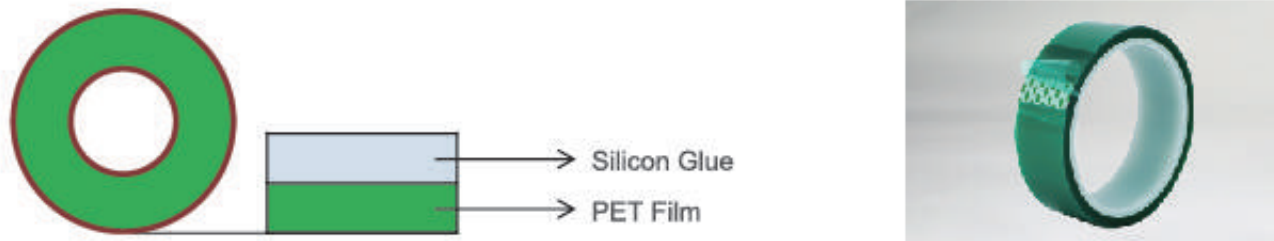

Item	Backing	Total Thickness (mic)	Backing Thickness (mic)	Elongation (%)	Peel Adhesion (N/25mm)	Temperature Resistance (°C)
GP60S	Green PET	60	38	≥ 50	≥ 7	200
GP80S	Green PET	80	50	≥ 50	≥ 9	200

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1260mm x 500m(usable 1240mm)	24/48/50/72/1260mm x 25/50/60m

Note: Other width and length can be customized according to customer request.

### Bag Sealing Tape



Item	Backing	Film Width (mm)	Glue Side	Adhesive Width One Side (mm)	Adhesive Width Other Side (mm)
BS08R	PE/OPP Film	8	Right/Left/Center	2.5	4.5
BS15R	PE/OPP Film	15	Right/Left/Center	4	6
BS18R	PE/OPP Film	18	Right/Left/Center	8	11


Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Finish Roll Size
8/9/13/14/15/18mm x 1000/1200/1500m

Note: Other width and length can be customized according to customer request.

## Special Single Side Tape

### Roller Wrapping Tape

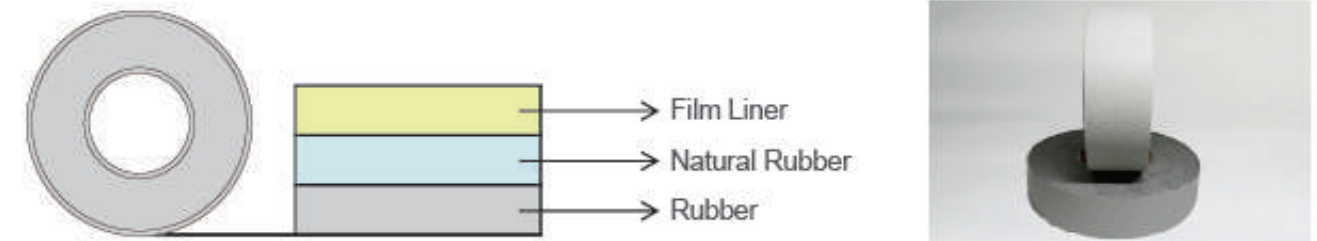

### Performance

Item	Backing	Total Thickness (mic)	Holding Power (h)	Peel Adhesion (N/25mm)
RW850R	Rubber	850	> 24	>7.5N

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
250mm x 25m	50mm x 10/25/50m

Note: Other width and length can be customized according to customer request.

### PVC Anti Slip Tape



Item	Backing (mm)	Total Thickness (mm)	Surface Granularity	Tensile Strength (N/25mm)	Elongation (%)	Peel Adhesion (N/25mm)
PA80C	0.1	0.6-0.65	80#	> 60	> 25	> 11

Note: Information and data are for universal values of product testing, and do not represent the actual value of each product.

Regular Jumbo Roll Size	Regular Finish Roll Size
1040mm x 500m(usable 1020mm)	24/25/48/50/72mm x 25/50m

Note: Other width and length can be customized according to customer request.



# DISPENSER

## ◎ Description

### NX5101



Holds up to 2"(50mm) width, 3" core Tape.  
Size(appr.): 240x150x68mm  
Weight(appr.): 0.3kg  
Colour: Blue, Red, green  
Qty:24pcs/CTN nw:8.2kg gw:9.5kg

### NX5201



Holds up to 2"(50mm) width, 3" core Tape.  
Size(appr.): 240x150x68mm  
Weight(appr.):0.25kg  
Colour: Blue, Red, Black  
Qty:24pcs/CTN nw:7.7kg gw:9kg

### NX5100



Holds up to 2"(50mm) width, 3" core Tape.  
Size(appr.): 245x150x75mm  
Weight(appr.): 0.34kg  
Colour: Blue, Red, green  
Qty:24pcs/CTN nw:9.6kg gw:11kg

### NX5200



Holds up to 2"(50mm) width, 3" core Tape.  
Size(appr.): 245x150x75mm  
Weight(appr.):0.31kg  
Colour: Blue, Red, Black  
Qty:24pcs/CTN nw:9kg gw:10kg

### NX5300



Holds up to 2"(50mm) width, 3" core Tape.  
Size(appr.): 180x65x260mm  
Weight(appr.): 0.36kg  
Colour: Blue, Red, Black  
Qty:24pcs/CTN

### NX7500



Holds up to 3"(75mm) width, 3" core Tape.  
Size(appr.): 235x165x95mm  
Weight(appr.): 0.48kg  
Colour: Blue, Red, Black  
Qty:24pcs/CTN

### NX4800



Holds up to 2"(50mm) width, 3" core Tape.  
Size(appr.): 245x150x75mm  
Weight(appr.): 0.34kg  
Colour: Blue, Red, green  
Qty:24pcs/CTN nw:9.6kg gw:11kg


## ◎ Quality Control

### Raw materials incoming inspection

Record the quality of each batch of raw material and evaluate suppliers according to the record.

### Shipment Inspection

Check products package and shipping mark before loading date.

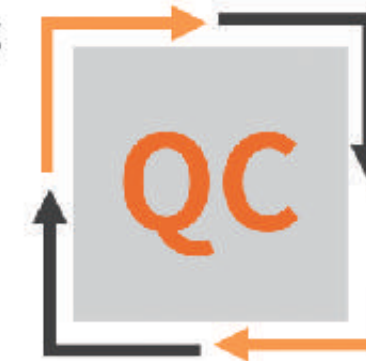

### Production process inspection

Each inspector each shift, checking quality randomly when coating and slitting.

### Finished product inspection

Inspect products appearance and performance by AQL standards.

## ◎ Lab Equipment



## ◎ Quality Certificate



## ◎ Technology R & D



### R & D Team

We have two R&D teams, one of them including our QC and core member of factory which leading by QC manager, the other team is professors of chemical major in universities and we cooperating with them in formula research and regular training.

### R & D Direction

Making our products with better performance, more environmentally friendly formulas, and higher added value.



### ◎ Production Management



### MEMO

