





Fixframe - filigree view

The exceptionally narrow profile provides even more light incidence in your living space and thus additional solar heat. neo smart-slide reduces your heating costs and improves your carbon footprint!

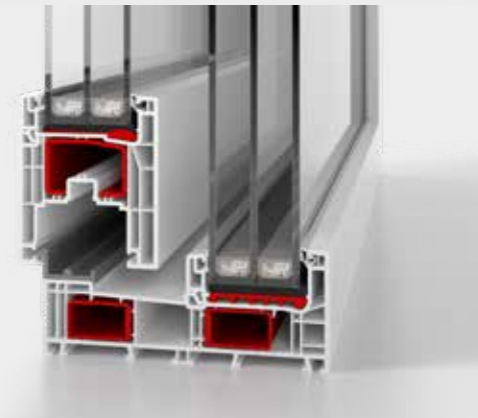

Step protection - robust solution

The additional frame profile in the lower area of the door protects the neo smart-slide from scratches, impacts and other effects. The step protection is resistant and easy to clean. This means that the sliding door will look good for years to come.

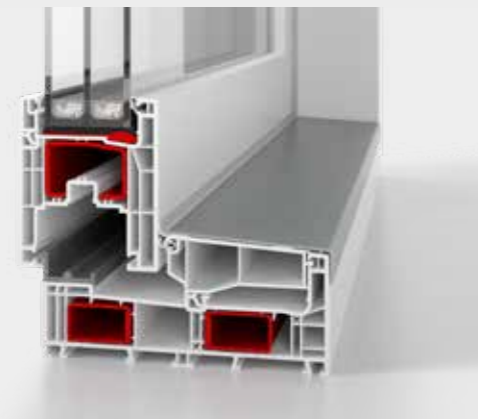

aluplast®



aluplast® - Specialist for window and door systems

aluplast GmbH is one of the leading system providers of PVC windows, main entrance doors, roller shutters and controlled domestic ventilation systems. The family-owned company headquartered in Karlsruhe was founded in 1982 by Manfred J. Seitz. Today, aluplast has 10 production sites worldwide and customers in more than 80 countries. With its wide product portfolio, the company offers almost any possible window construction and variation. Its success is based above all on the company's market proximity that always results in pioneering innovations.

Learn more at www.aluplast.net



aluplast® - Spezialist für Fenster- und Türensyste

neo smart-slide

EN | © aluplast | Subject to technical changes | Version 06.2024 | Pictures: Archive



SIMPLY TO FEEL GOOD

You can now enjoy beautiful views with your new neo smart-slide sliding door. neo smart-slide blends in perfectly between the living space and the outdoor area with its modern cubic design. Large glass surfaces with element formats of up to **6.0 m x 2.5 m** grant you a fantastic view of the outside.

But the neo smart-slide sliding door is not only outstanding visually, but also in terms of its operation. Easy sliding, intuitive closing and the convenient self-closing mechanism speak for themselves. Low effort meets high tightness.



The smart sliding solution
in a modern cubic design.

DESIGN MEETS TECHNOLOGY

neo smart-slide

- low installation depth of 78 mm or 154 mm
- $U_f = 1.3 \text{ W/m}^2\text{K}$
- glass and infill thickness in the sash up to 54 mm (2- to 3-fold glass) possible
- neo system platform
- integrated hardware technology (hardware neutral)
- more safety through additional locking points
- selection of opening mechanisms: schema A + C
- available in numerous decor variants: wooddec, aludec and Farbwelt
- option: bonding inside (adhesive technology)
- application: New construction/renovation

