

PVC木塑/PVC型材生產線


PVC/WPC Profile Production Line

該生產線可連續生產中空或實心的Pvc木塑發泡型材（門框、窗、牆板等）。具有防火、防水、防腐蝕、耐潮濕、不被蟲蛀、不長真菌、耐酸鹼、無毒害、無污染等優良性能，廣泛應用於室內裝修、建築、家具等領域。

The PVC WPC profile extrusion line is suitable for producing hollow or solid PVC WPC foaming profile. This profiles have advantage of fireproof,waterproof,anticaustic,moistureproof,mothproof,mildewproof,non-toxic and environmentally friendly. These profiles are widely used in the fields of interior decoration, furniture making, such as door frame, wall panel, skirting,photo frame, plastic door and window profiles.

Main Technical parameter: 主要技術參數

Model	SJMS51/105	SJMS-65/132	SJMS-80/156
Max product width	200mm	250mm	600mm
Extruder capacity	100-120kg/h	150-180kg/h	250-380kg/h
Main motor power	22kw	37kw	75kw
Vacuum pump power	3kw	7.5*5.5kw	11*7.5kw
Calibrating platform length	4000mm	6000mm	6000mm

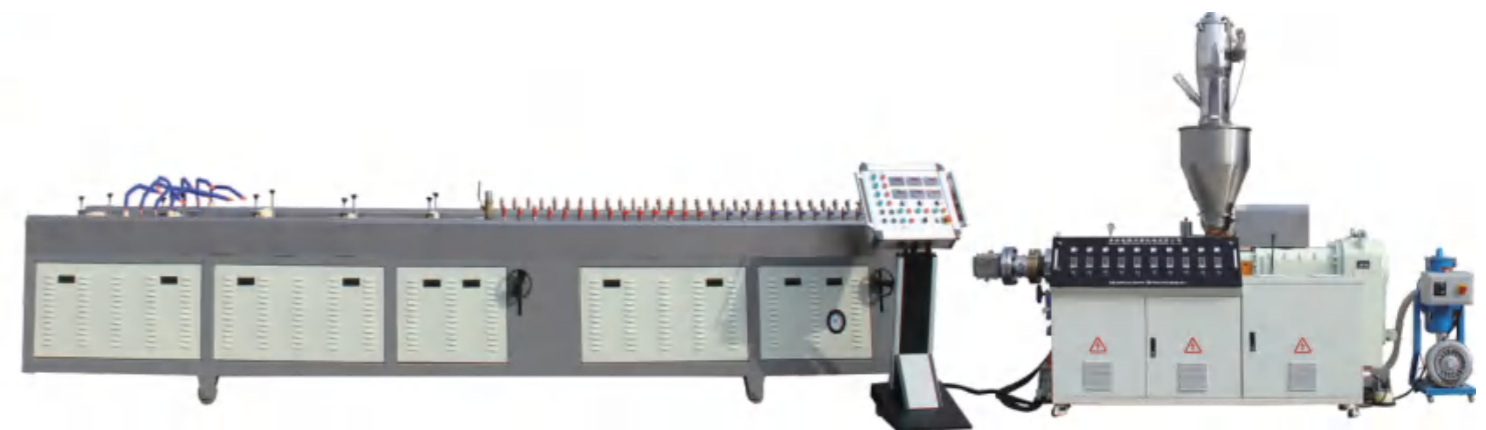

PVC木塑发泡板生产线

PVC/WPC Skinning Foam Board Production Line


SJMSB系列木塑发泡板生产线可连续生产PVC木塑发泡板。PVC木塑发泡板具有防火、防水、防腐蚀、耐潮湿、不被虫蛀、不长真菌、耐酸碱、无毒害、无污染等优良性能，广泛应用于内部装潢用板、建筑屋外墙板、内饰用板、家具、卫浴、广告板、隔断等领域。

SJMSB series PVC/WPC foam board production line can continuously produce PVC WPC foam board. The PVC/WPC foam board has the advantage of fireproof, waterproof, anticaustic, moistureproof, mothproof, mildewproof and enviromentlly friendly, etc. It is widely used in interior decoration, precast exterior wall panels, furniture making, bathroom decoration, poster board, partition, etc.



Main Technical parameter: 主要技术参数

型号 Model	SJMSB-80/156	SJMSB-80/173	SJMSB-92/188
制品厚度 Product thickness	5-18mm	3-30mm	20-40mm
最大宽度 Max width	1220mm	1220mm	1220mm
挤出量 Extrusion capacity	350-380kg/h	420-450kg/h	500-550kg/h
电机功率 Main Motor power	75kw	90kw	110kw

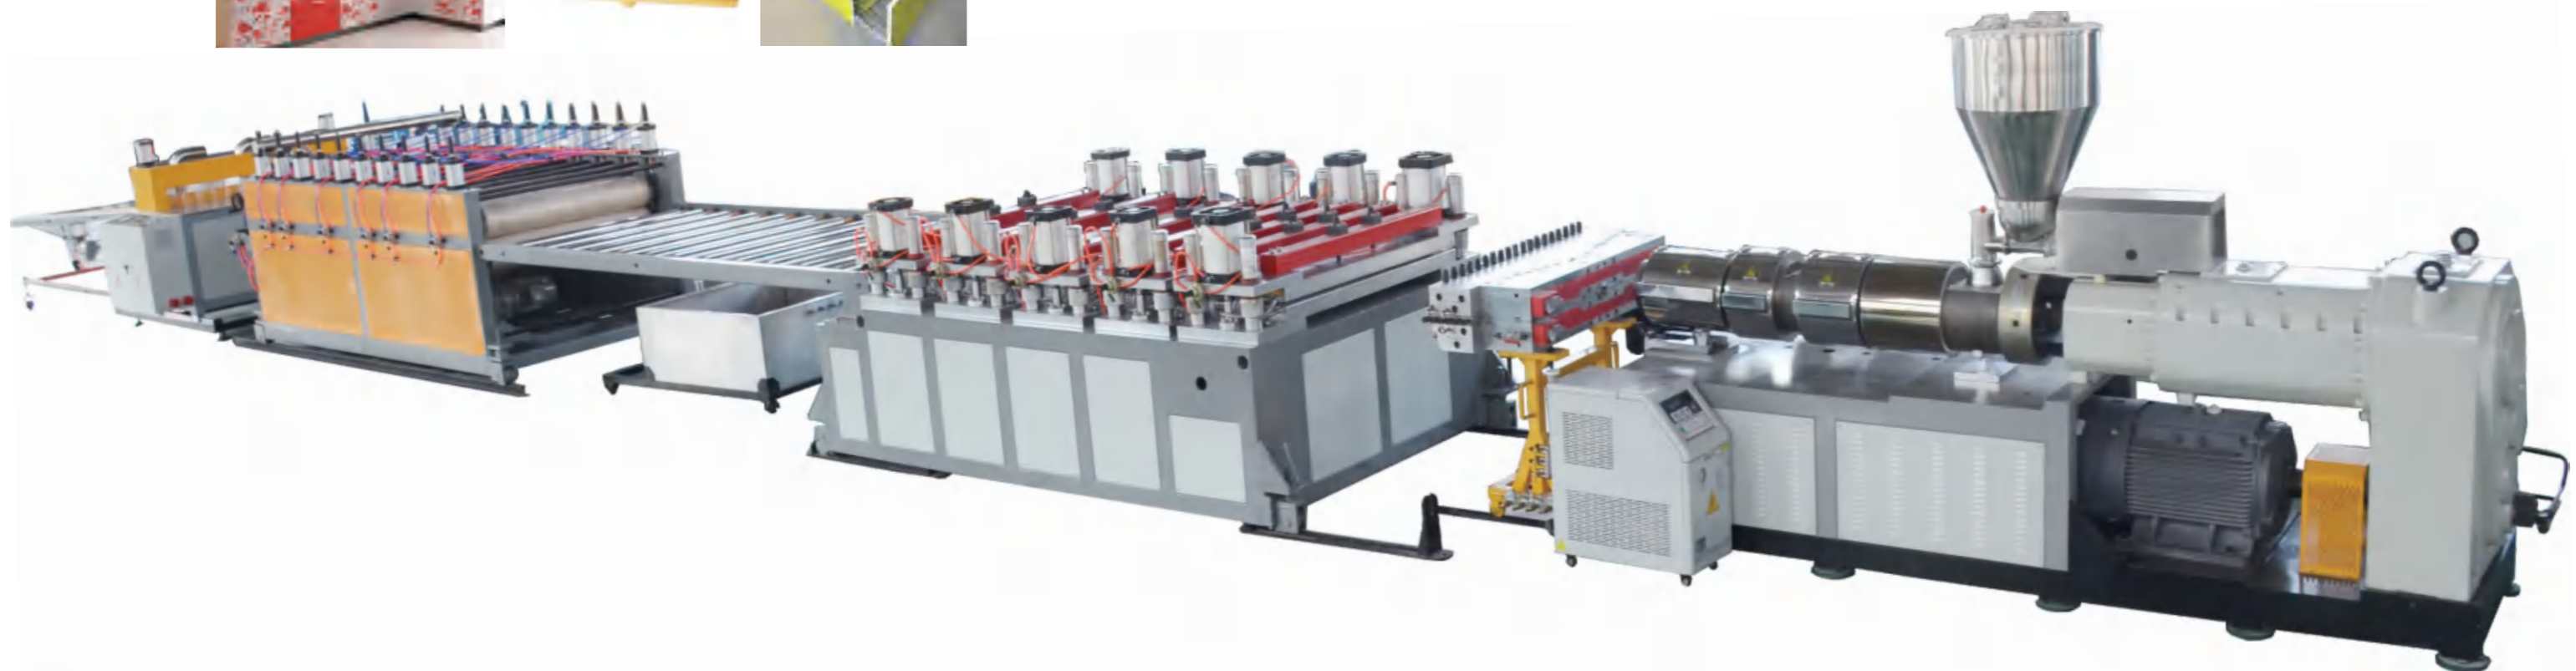

PVC木塑/PVC門板生產線

PVC/WPC Door Panel Production Line


該生產線可連續穩定生產PVC木塑門板半成品，配合木塑型材生產線及後續加工處理設備可加工出完整的門和門套，PVC木塑門板具有色彩多樣、防火、防水、防腐蝕、耐潮濕、不被蟲蛀、不長真菌、耐酸鹼、無害、無污染等優良性能。木塑門可廣泛應用於室內門、醫院門診門、學校教室門。

The PVC WPC door panel extrusion line is suitable for producing the preparatory PVC WPC door panel. We can provide the turnkey project for making complete finished door from raw material. The whole production line includes the PVC WPC door frame extrusion line, WPC door panel extrusion line and subsequent processing equipments. The PVC WPC door has the advantage of fireproof, waterproof, anticaustic, moistureproof, mothproof, mildewproof and environmentally friendly. It can be widely used in interior doors, hospital ward door, school classroom door, various styles can be customized.



Main Technical parameter: 主要技術參數

Model	HGMSMB-800	HGMSMB-1000	HGMSMB-1200
Extruder model	80/156	92/188	92/188
Max.width	800mm	1000mm	1200mm
Max extruder capacity	350-380kg/h	500-550kg/h	500-550kg/h
Main motor power	75kw	110kw	110kw
Door thickness	20-50mm	20-50mm	20-50mm

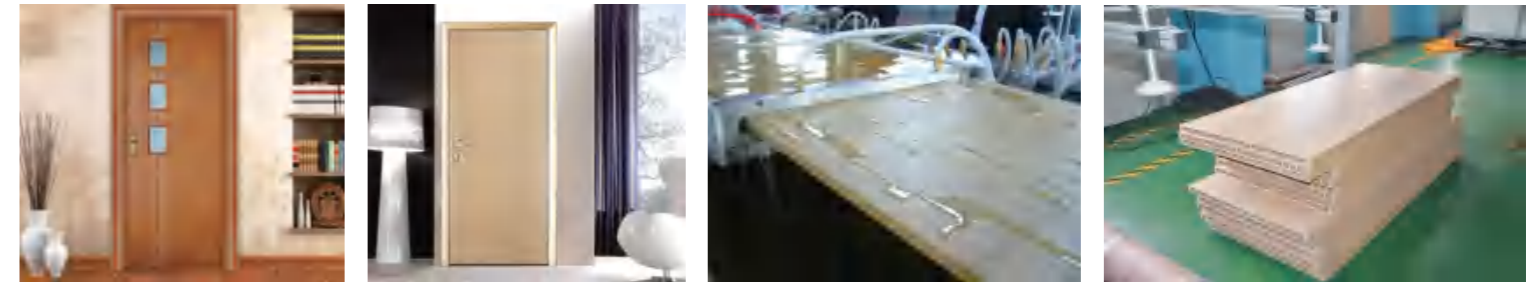

木塑门板加工设备

WPC Door Processing Machine

在线压花机
WPC Profile Online Embossing Machine



砂光机
WPC Sanding Machine



拉毛机
WPC Profile Napping Machine



1300PUR热胶覆膜机
1300PUR hot glue laminating machine



真空覆膜机
Vacuum laminating machine



膜分切机
Film slitting machine



CNC雕刻机
CNC Engraving machine



精密切割锯
Precision cutting machine



立式铣床
Vertical milling machine



双头锁孔机
Double Keyhole machine



欢迎来到同三合固

WELCOME TO TONGSANHEGU

