


## HOT MELT HOSES


### Engineered for Durability and Longevity

As a world leader in adhesive application engineering, Valco Melton is able to offer a larger range of hot melt hoses with improved market standard adaptability. Valco Melton hoses are the ideal solution for quality hot melt transport and optimal benefits.

- Industry standard compatible
- Flexible
- Interchangeable
- Versatile & dependable for all applications
- Proven design & quality guaranteed
- Long lasting design to remain "char" free
- "Nomex" and Flex Foam insulation for the best insulation and temperature stability in the industry

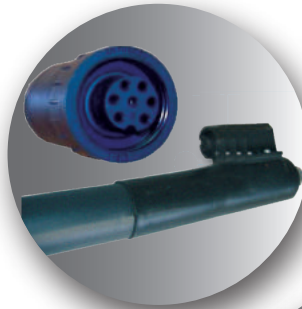

Washdown hoses option available with specialty fittings and rubber covers



Spring accessory and corrugated covers improve hose protection



Dual RTD Hot Melt Hoses



Electrical connections are compatible with market standards




Hoses available with harding connectors



Convertible connectors go from Straight to 90 degrees for easy connections

An ample range of diameters and lengths:


- $\varnothing$ 6mm,  $\varnothing$ 8mm,  $\varnothing$ 10 mm,  $\varnothing$ 12 mm,  $\varnothing$ 16 mm
- Up to 26 m length

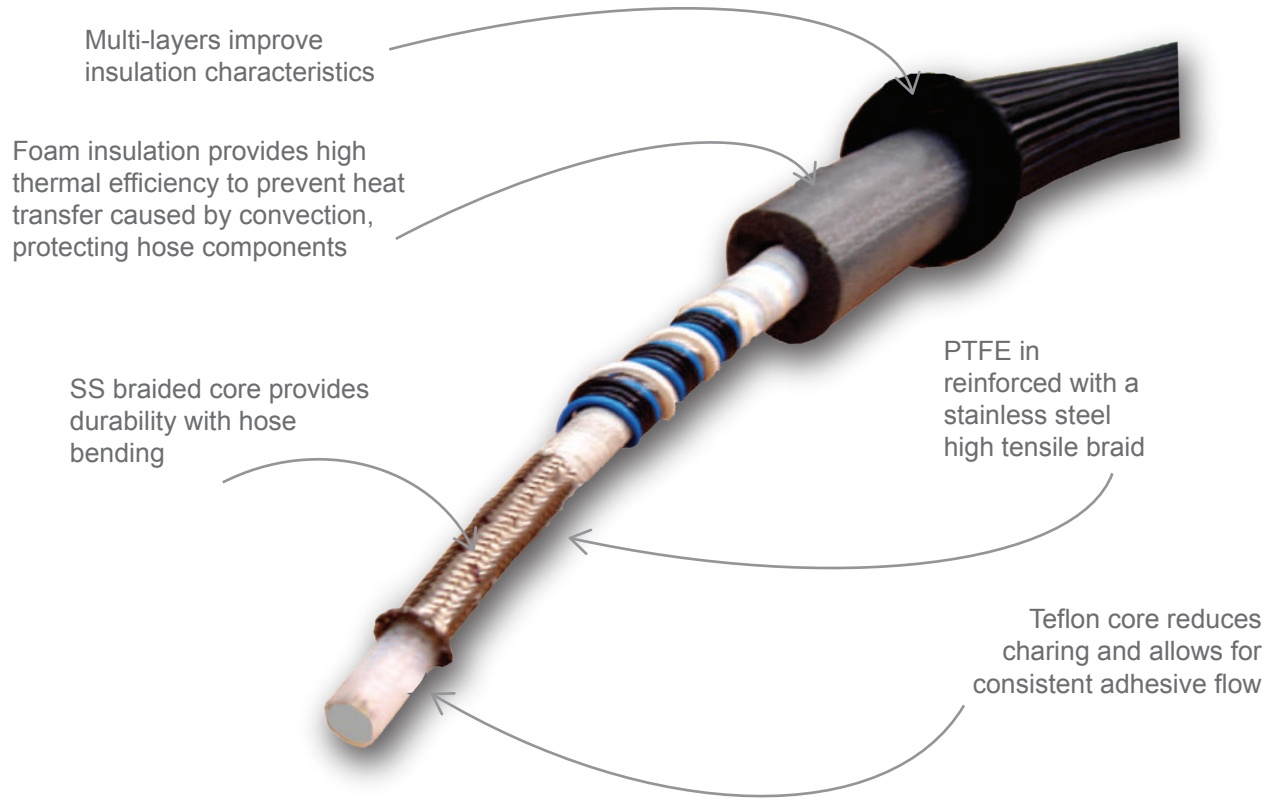

- Valco Melton manufactures hot melt hoses using top of the line market components that are 100% mechanically and electronically interchangeable
- Hot Melt Hoses are temperature sensed by Ni-120 or PT-100 RTD
- Accessories include brackets, fittings, hose protectors, corrugated and braided covers
- Valco Melton hoses are CE certified

## Technical Specifications

Characteristics	Hot Melt Hoses			
Maximum Working Temperature	220°C			
Internal Diameter (mm)	Ø8	Ø13	Ø16	Ø20
Maximum Working Pressure (bar)	100	100	100	80
Power Consumption (W/m)	150	175	195	200
RTD	PT-100/ NI-120/ NTC 1000/ FEKO			
Minimum Curvature Radius (180°)	160 mm			
Voltage	200-240 VAC			

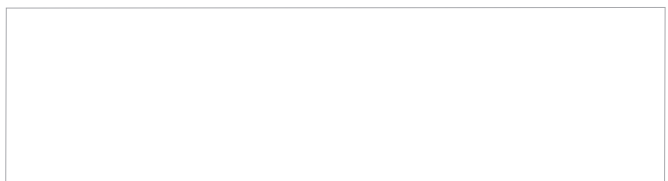

**For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local Valco Melton representative.**  
 World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612  
 Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584  
 Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834  
[info@valcomelton.com](mailto:info@valcomelton.com) • Serving over 76 Countries Worldwide • [valcomelton.com](http://valcomelton.com)