



CREATES
PERMANENT
SOLUTIONS



100E UNIVERSAL SILICONE SEALANT

One-component acetoxy cure silicone sealant for a range of general sealing and glazing applications. It provides a strong adhesion and suitable for use on common non-porous building materials.

Properties

Stays permenantly elastic after curing.

Remains flexible in low and high temperatures.

Resistant to temperature exteremes.

Resistance to aging, cracking and discoloring.

Applications Area


Sealing around windows and doors.

Sealing in DIY applications.

On bathroom, kitchen and plumbing applications.

Connection and expansion joints on glass, porcelain, steel etc.

Sealing electric, telephone etc. sockets and switches.

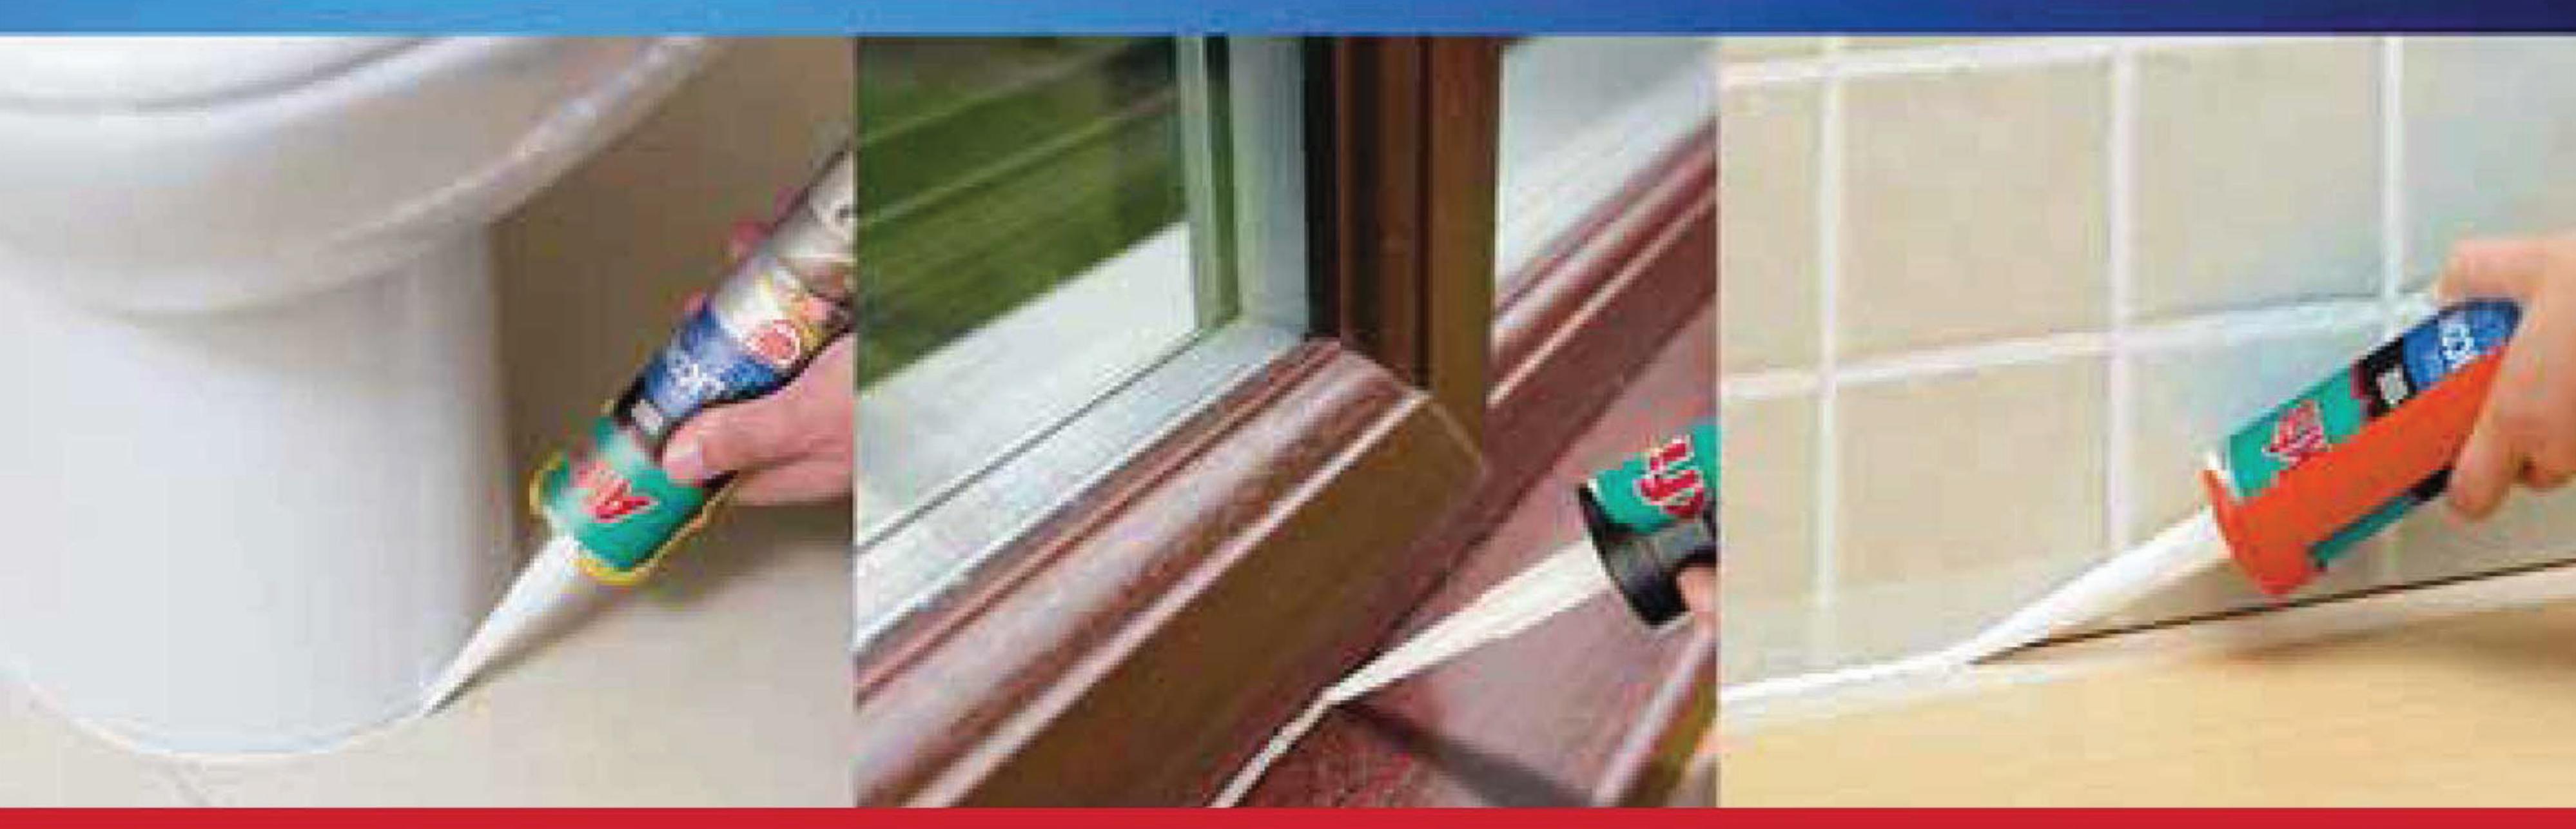











www. Akfix .com info@akfix.com