



Isı Yalıtımlı Sürme Kapı ve Pencere Sistemi SL 92 *Thermal Sliding Door & Window System*




ÖZELLİKLER:

- 92 mm kasa kesit derinliği
- Perdeli kıl fitillerle sızdırmazlık
- 12 ila 24 mm aralığında cam kalınlıkları
- Euro tip aksesuarların tümüne uyumlu
- Özel kilitleme aksesuarları ile yüksek güvenlik
- Elektrostatik toz boyalı veya eloksallı yüzey kaplama

AVANTAJLAR:

- Isı, akustik, su ve hava yalıtımında yüksek performans
- Çok sayıda değişik tip mimari açılım alternatifi
- Hafif strüktür, kolay üretim
- Estetik iç ve dış görünüm
- Tüm pencere ve kapı tipleri ile adaptasyon

AÇILIM TİPLERİ:

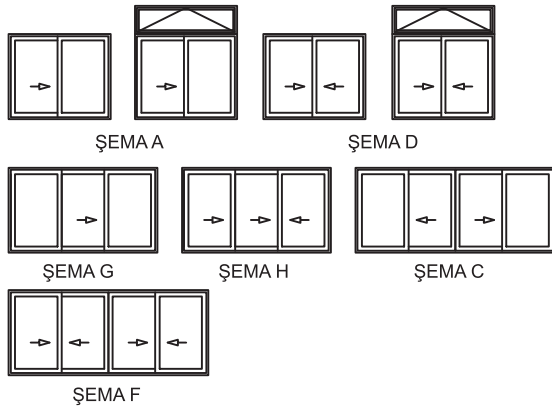

PERFORMANS:

Su sızdırmazlık EN 1027-EN 12208	1A (0Pa)	2A (50Pa)	3A (100Pa)	4A (150Pa)	5A (200Pa)	6A (250Pa)	7A (300Pa)	8A (450Pa)	9A (600Pa)	Exxxx (xxxxPa)
Hava geçirgenlik EN 1026 - EN 12207	1 (150Pa)	2 (300Pa)	3 (600Pa)	4 (600Pa)						
Rüzgar yükü dayanımı EN 12211 - EN 12210	max pressure with deflection	1 (400Pa) A (≤ 1/150)	2 (800Pa) B (≤ 1/200)	3 (1200Pa) C (≤ 1/300)	4 (1600Pa)	5 (2000Pa)	Exxx (>2000Pa)			

Isısal geçirgenlik
Uf W/m² K



Uw W/m² K *



* 2 kanatlı fransız pencere 2500 x 2500 mm; Ug=1.0 W/m² K, psi=0.05 W/m K


FEATURES:

- 92 mm system cross section depth
- Impermeability with Pile Weather Strips
- 12 mm to 24 mm glass thickness range
- Compatible with all Euro-type accessories
- High security with special locking accessories
- Electrostatic powder coating or anodized surfaces

ADVANTAGES:

- High performance in acoustic, water, air and thermal insulation
- Numerous types of architectural detail alternatives
- Light structure, easy processing
- Aesthetic interior and exterior view
- Adoptable to all types of doors and windows

OPENING TYPES:

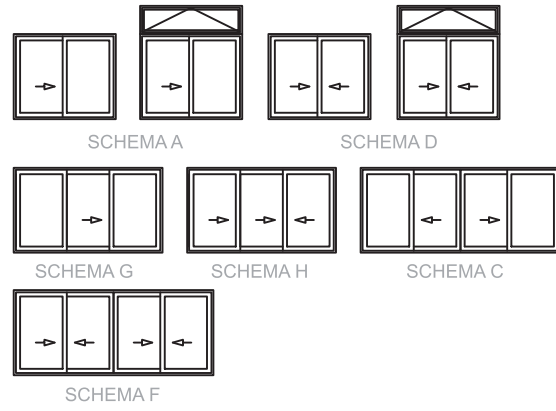

PERFORMANCE:

Watertightness EN 1027 - EN 12208	1A (0Pa)	2A (50Pa)	3A (100Pa)	4A (150Pa)	5A (200Pa)	6A (250Pa)	7A (300Pa)	8A (450Pa)	9A (600Pa)	Exxxx (xxxxPa)
Air permeability EN 1026 - EN 12207	1 (150Pa)	2 (300Pa)	3 (600Pa)	4 (600Pa)						
Resistance to wind load EN 12211 - EN 12210	max pressure with deflection	1 (400Pa) A (≤ 1/150)	2 (800Pa) B (≤ 1/200)	3 (1200Pa) C (≤ 1/300)	4 (1600Pa)	5 (2000Pa)	Exxx (>2000Pa)			




Thermal transmittance
Uf W/m² K



Uw W/m² K *



* Double winged french window 2500 x 2500 mm; Ug=1.0 W/m² K, psi=0.05 W/m K

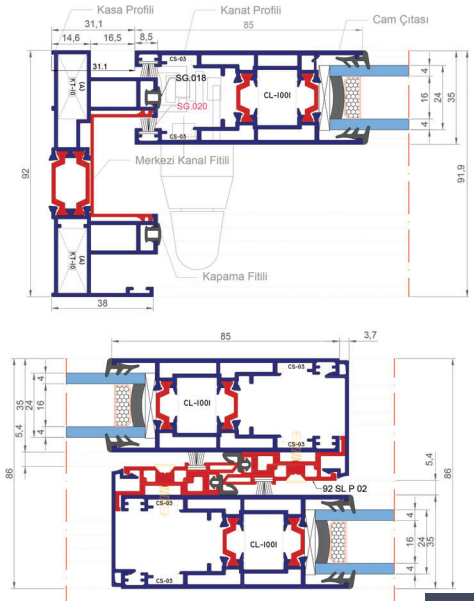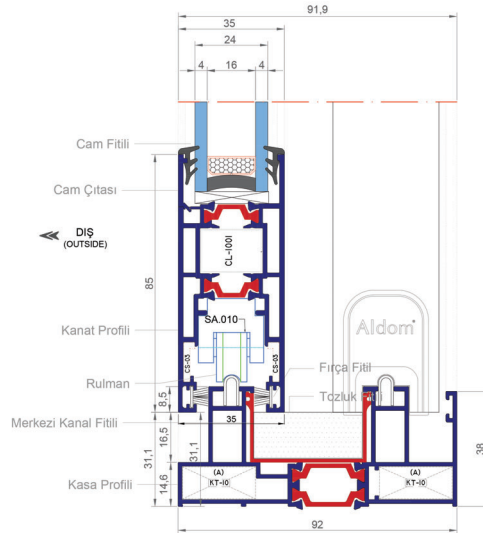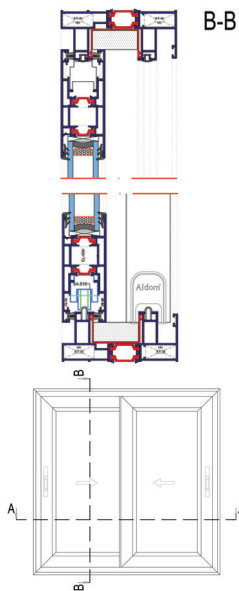



Isı Yalıtımlı Kaldırma Sürme Kapı ve Pencere Sistemi SL 92 HS *Thermal Lift & Slide Door and Window System*




ÖZELLİKLER:

- 92 mm kasa kesit derinliği
- Perdeli kıl fitillerle sızdırmazlık
- 12 ila 24 mm aralığında cam kalınlıkları
- Euro tip aksesuarların tümüne uyumlu
- Özel kilitleme aksesuarları ile yüksek güvenlik
- Elektrostatik toz boyalı veya eloksallı yüzey kaplama

AVANTAJLAR:

- Isı, akustik, su ve hava yalıtımında yüksek performans
- Çok sayıda değişik tip mimari açılım alternatifleri
- Hafif strüktür, kolay üretim
- Estetik iç ve dış görünüm
- Tüm pencere ve kapı tipleri ile adaptasyon

AÇILIM TIPLERİ:

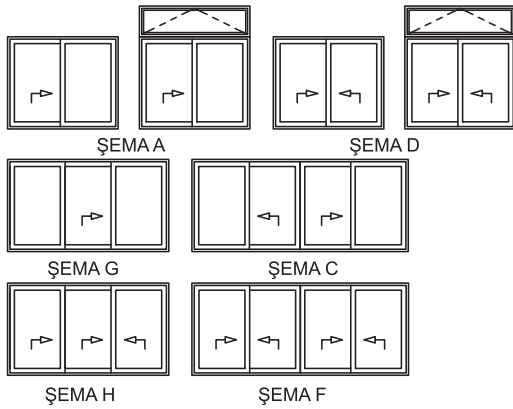


FEATURES:

- 92 mm system cross section depth
- Impermeability with Pile Weather Strips
- 12 mm to 24 mm glass thickness range
- Compatible with all Euro-type accessories
- High security with special locking accessories
- Electrostatic powder coating or anodized surfaces

ADVANTAGES:

- High performance in acoustic, water, air and thermal insulation
- Numerous types of architectural detail alternatives
- Light structure, easy processing
- Aesthetic interior and exterior view
- Adoptable to all types of doors and windows

OPENING TYPES:

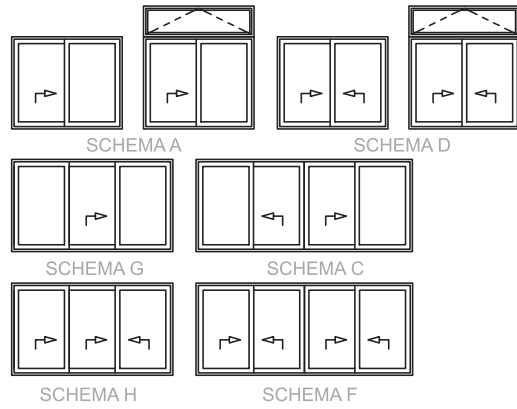

PERFORMANS:

Su sızdırmazlık EN 1027-EN 12208	1A (0Pa)	2A (50Pa)	3A (100Pa)	4A (150Pa)	5A (200Pa)	6A (250Pa)	7A (300Pa)	8A (450Pa)	9A (600Pa)	Exxxx (xxxxPa)
Hava geçirgenlik EN 1026 - EN 12207	1 (150Pa)	2 (300Pa)	3 (600Pa)	4 (600Pa)						
Rüzgar yükü dayanımı EN 12211 - EN 12210	max pressure	1 (400Pa)	2 (800Pa)	3 (1200Pa)	4 (1600Pa)	5 (2000Pa)	Exxx (>2000Pa)			
	with deflection	A (≤ 1/150)	B (≤ 1/200)	C (≤ 1/300)						

Isısal geçirgenlik
Uf W/m² K

Uw W/m² K*

* 2 kanatlı fransız pencere 2500 x 2500 mm; Ug=1.0 W/m² K, psi=0.05 W/m K

PERFORMANCE:

Watertightness EN 1027 - EN 12208	1A (0Pa)	2A (50Pa)	3A (100Pa)	4A (150Pa)	5A (200Pa)	6A (250Pa)	7A (300Pa)	8A (450Pa)	9A (600Pa)	Exxxx (xxxxPa)
Air permeability EN 1026 - EN 12207	1 (150Pa)	2 (300Pa)	3 (600Pa)	4 (600Pa)						
Resistance to wind load EN 12211 - EN 12210	max pressure	1 (400Pa)	2 (800Pa)	3 (1200Pa)	4 (1600Pa)	5 (2000Pa)	Exxx (>2000Pa)			
	with deflection	A (≤ 1/150)	B (≤ 1/200)	C (≤ 1/300)						

Thermal transmittance
Uf W/m² K

Uw W/m² K*

* Double winged french window 2500 x 2500 mm; Ug=1.0 W/m² K, psi=0.05 W/m K

