


FOG INERTIAL MEASUREMENT UNIT

U121D

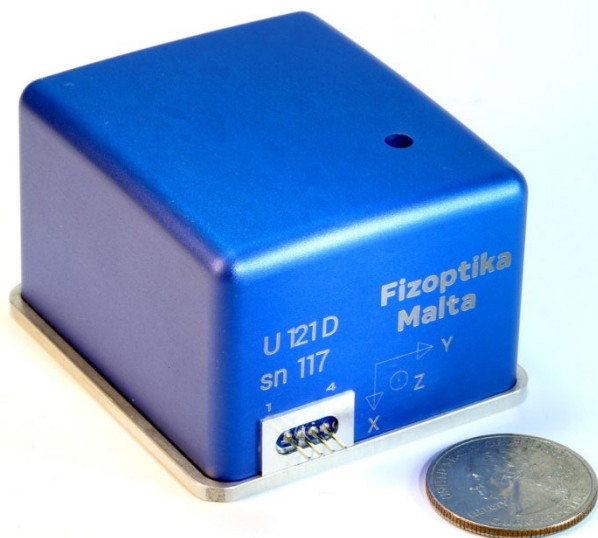

PROVISIONAL DATASHEET

GYROSCOPES PERFORMANCE

Input range	°/s	400	for info
Bias, RMS	°/h	1	Allan variance min
ARW	°/√h	0.05	white noise PSD
Magnetic response	°/h/Gauss	0.3	typical

ACCELEROMETERS PERFORMANCE

Range	g	10
Bias stability	mg	0.2
Bandwidth	Hz	250

ELECTRICAL INTERFACE

Initialization	s	1	
Powering	W	1.5	+5V
Data rate	kHz	4	default
Baud rate	kBd	921.6	RS422, asynchronous

ENVIRONMENT

Operating temperature	°C	-40...+70	
Endurance temperature	°C	-55...+85	> 2 h, non-operating
Vibration, RMS	g	6	20 Hz... 2000 Hz
Shocks	g	350	1 ms half-sine

PHYSICAL PARAMETERS

Dimensions	mm	63x56x40	ISO 2768-m
Weight	gram	145	est
Volume	cl (in ³)	14 (8.5)	
Frame resonance	kHz	> 1	
Housing		Al alloy	