


Yataklı Seri Rulmanları




UC 200



UC 300



SA



SB



CSA




CSB




UK




NA

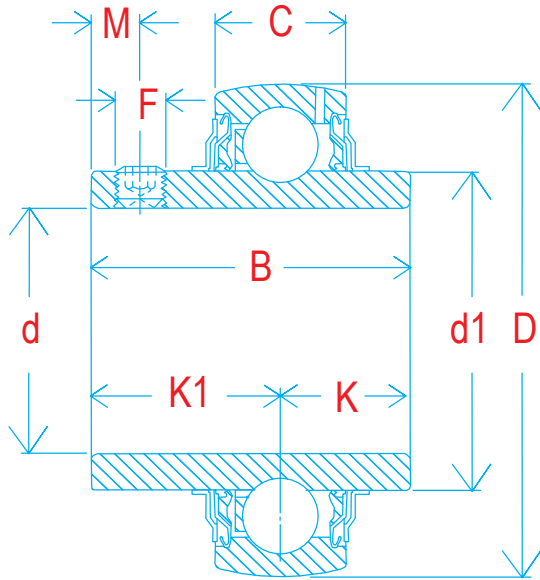


Rulman No	Boyutlar (mm)								Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	K	K1	M	F	Dinamik	Statik		
UC 201	12	47	31,0	17	12,7	18,3	5,0	M6 X 1,00	12,8	6,7	4.000	0,2100
UC 202	15	47	31,0	17	12,7	18,3	5,0	M6 X 1,00	12,8	6,7	4.000	0,1900
UC 203	17	47	31,0	17	12,7	18,3	5,0	M6 X 1,00	12,8	6,7	4.000	0,1800
UC 204	20	47	31,0	17	12,7	18,3	5,0	M6 X 1,00	12,8	6,7	4.000	0,1700
UC 205	25	52	34,1	17	14,3	19,8	5,4	M6 X 1,00	14,0	8,1	3.400	0,1900
UC 206	30	62	38,1	19	15,9	22,2	5,5	M6 X 1,00	19,5	11,4	2.800	0,3100
UC 207	35	72	42,9	20	17,5	25,4	6,9	M8 X 1,00	25,7	15,6	2.400	0,4600
UC 208	40	80	49,2	21	19,0	30,2	8,0	M8 X 1,00	29,5	18,1	2.200	0,6300
UC 209	45	85	49,2	22	19,0	30,2	8,0	M8 X 1,00	31,9	20,8	1.900	0,6800
UC 210	50	90	51,6	24	19,0	32,6	10,0	M10 X 1,25	35,0	23,7	1.800	0,7800
UC 211	55	100	55,6	25	22,2	33,4	10,0	M10 X 1,25	43,3	29,4	1.600	1,0700
UC 212	60	110	65,1	27	25,4	39,7	10,0	M10 X 1,25	47,7	33,4	1.500	1,5100
UC 213	65	120	65,1	28	25,4	39,7	10,0	M10 X 1,25	57,2	40,0	1.400	1,8600
UC 214	70	125	74,6	29	30,2	44,4	12,0	M12 X 1,25	62,2	43,9	1.300	2,1800
UC 215	75	130	77,8	30	33,3	44,5	12,0	M12 X 1,25	62,1	44,8	1.200	2,2100
UC 216	80	140	82,6	33	33,3	49,3	12,0	M12 X 1,25	72,6	53,3	1.100	2,7900
UC 217	85	150	85,7	35	34,1	51,6	12,0	M12 X 1,25	83,2	64,5	1.000	3,3800
UC 218	90	160	96,0	37	39,7	56,3	12,0	M12 X 1,25	95,8	72,6	950	4,4600

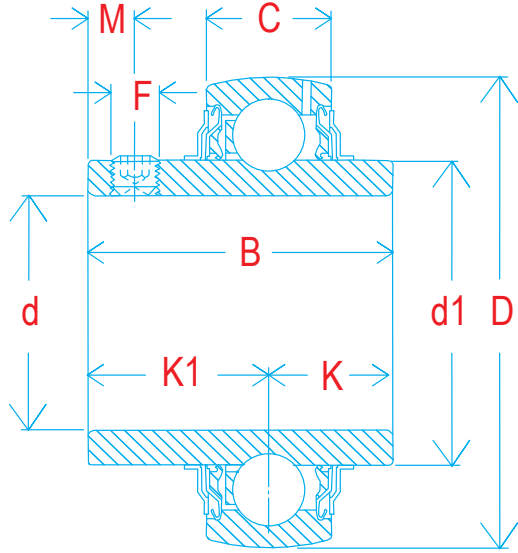


Rulman No	Boyutlar (mm)								Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	K	K1	M	F	Dinamik	Statik		
UC 305	25	62	38	21	15	23	6	M6 X 1,00	22,5	11,6	2.800	0,4400
UC 306	30	72	43	23	17	26	6	M6 X 1,00	27,1	15,2	2.600	0,5600
UC 307	35	80	48	25	19	29	8	M8 X 1,00	33,5	19,2	2.200	0,7100
UC 308	40	90	52	27	19	33	10	M10 X 1,25	41,0	24,0	2.000	1,0000
UC 309	45	100	57	30	22	35	10	M10 X 1,25	53,3	32,2	1.800	1,2800
UC 310	50	110	61	32	22	39	12	M12 X 1,25	62,4	38,3	1.700	1,6500
UC 311	55	120	66	34	25	41	12	M12 X 1,25	72,1	45,0	1.400	2,0700
UC 312	60	130	71	36	26	45	12	M12 X 1,25	82,3	52,2	1.300	2,5900
UC 313	65	140	75	38	30	45	12	M12 X 1,25	94,5	60,8	1.200	3,1500
UC 314	70	150	78	40	33	45	12	M12 X 1,25	104,7	68,1	1.100	3,8300
UC 315	75	160	82	42	32	50	12	M14 X 1,50	114,0	78,7	1.000	4,5900
UC 316	80	170	86	44	34	52	14	M14 X 1,50	123,5	88,2	970	5,4000
UC 317	85	180	96	46	40	56	16	M16 X 1,50	133,2	98,3	950	6,5800
UC 318	90	190	96	48	40	56	16	M16 X 1,50	144,7	110,6	900	7,3400
UC 319	95	200	103	50	41	62	16	M16 X 1,50	156,7	122,1	850	8,7000
UC 320	100	215	108	54	42	66	18	M18 X 1,50	173,1	140,7	800	10,8000
UC 322	110	240	117	60	46	71	18	M18 X 1,50	206,8	179,9	650	14,3000
UC 324	120	260	126	64	51	75	18	M18 X 1,50	228,0	208,6	500	18,5000
UC 326	130	280	135	68	54	81	20	M20 X 1,50	274,2	273,7	400	23,0000
UC 328	140	300	145	72	59	86	20	M20 X 1,50	296,9	306,5	300	28,5000

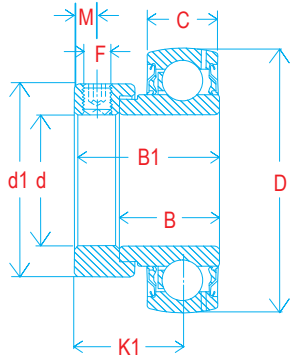


Rulman No	Boyutlar (mm)									Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	K1	B1	d1	M	F	Dinamik	Statik		
SA 201	12	40	19,1	12	22,1	28,1	28,6	5,0	M6 X 1,00	9,6	4,8	4.500	0,2000
SA 202	15	40	19,1	12	22,1	28,1	28,6	5,0	M6 X 1,00	9,6	4,8	4.500	0,2000
SA 203	17	40	19,1	12	22,1	28,1	28,6	5,0	M6 X 1,00	9,6	4,8	4.500	0,2000
SA 204	20	47	21,5	14	24,0	31,0	33,3	5,0	M6 X 1,00	12,8	6,7	4.000	0,2100
SA 205	25	52	22,0	15	23,6	31,1	38,1	5,0	M6 X 1,00	14,0	8,1	3.400	0,2500
SA 206	30	62	23,8	16	27,7	35,7	44,5	6,0	M6 X 1,00	19,5	11,4	2.800	0,3900
SA 207	35	72	25,4	17	30,4	38,9	55,6	6,5	M8 X 1,00	25,7	15,6	2.400	0,6000
SA 208	40	80	30,2	18	34,7	43,7	60,3	6,5	M8 X 1,00	29,5	18,1	2.200	0,7700
SA 209	45	85	30,2	19	34,2	43,7	63,5	6,5	M8 X 1,00	31,9	20,8	1.900	0,8400
SA 210	50	90	30,2	20	33,7	43,7	69,9	6,5	M8 X 1,00	35,0	23,7	1.800	1,0200
SA 211	55	100	32,5	21	37,9	48,4	76,2	8,0	M10 X 1,25	43,3	29,4	1.600	1,3700
SA 212	60	110	37,2	22	42,1	53,1	84,2	8,0	M10 X 1,25	47,7	33,4	1.500	1,8500

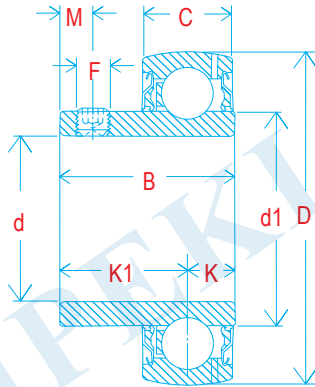


Rulman No	Boyutlar (mm)								Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	K	K1	M	F	Dinamik	Statik		
SB 201	12	40	22	12	6,0	16,0	4,9	M5 X 0,8	9,6	4,8	4.500	0,0900
SB 202	15	40	22	12	6,0	16,0	4,9	M5 X 0,8	9,6	4,8	4.500	0,0800
SB 203	17	40	22	12	6,0	16,0	4,9	M5 X 0,8	9,6	4,8	4.500	0,0700
SB 204	20	47	25	14	7,0	18,0	5,0	M6 X 1,0	12,8	6,7	4.000	0,1200
SB 205	25	52	27	15	7,5	19,5	5,5	M6 X 1,0	14,0	8,1	3.400	0,1800
SB 206	30	62	30	16	8,0	22,0	5,9	M6 X 1,0	19,5	11,4	2.800	0,2600
SB 207	35	72	32	17	8,5	23,5	8,0	M8 X 1,0	25,7	15,6	2.400	0,4300
SB 208	40	80	34	18	9,0	25,0	8,0	M8 X 1,0	29,5	18,1	2.200	0,6000
SB 209	45	85	36	19	9,5	26,5	8,0	M8 X 1,0	31,9	20,8	1.900	0,8000
SB 210	50	90	38	20	10,0	28,0	10,0	M10 X 1,25	35,0	23,7	1.800	0,8300
SB 211	55	100	40	21	10,5	29,5	10,0	M10 X 1,25	43,3	29,4	1.600	1,1200
SB 212	60	110	42	22	11,0	31,0	10,0	M10 X 1,25	47,7	33,4	1.500	1,5500

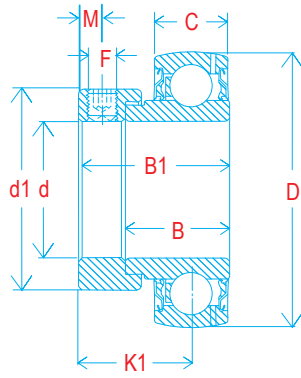


Rulman No	Boyutlar (mm)									Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	K1	B1	d1	M	F	Dinamik	Statik		
CSA 201	12	40	19,1	12	22,1	28,1	28,6	5,0	M6 X 10	9,6	4,8	4.500	0,2000
CSA 202	15	40	19,1	12	22,1	28,1	28,6	5,0	M6 X 10	9,6	4,8	4.500	0,2000
CSA 203	17	40	19,1	12	22,1	28,1	28,6	5,0	M6 X 10	9,6	4,8	4.500	0,2000
CSA 204	20	47	21,5	14	24,0	31,1	33,3	5,0	M6 X 10	12,8	6,7	4.000	0,2100
CSA 205	25	52	22,0	15	23,6	31,1	38,1	5,0	M6 X 10	14,0	8,1	3.400	0,2500
CSA 206	30	62	23,8	16	27,7	35,7	44,5	6,0	M6 X 10	19,5	11,4	2.800	0,3900
CSA 207	35	72	25,4	17	30,4	38,9	55,6	6,5	M8 X 10	25,7	15,6	2.400	0,6000
CSA 208	40	80	30,2	18	34,7	43,7	60,3	6,5	M8 X 10	29,5	18,1	2.200	0,7700
CSA 209	45	85	30,2	19	34,2	43,7	63,5	6,5	M8 X 10	31,9	20,8	1.900	0,8400
CSA 210	50	90	30,2	20	33,7	43,7	69,9	6,5	M8 X 10	35,0	23,7	1.800	1200
CSA 211	55	100	32,5	21	37,9	48,4	76,2	8,0	M10 X 1,25	43,3	29,4	1.600	1,3700
CSA 212	60	110	37,2	22	42,1	53,1	84,2	8,0	M10 X 1,25	47,7	33,4	1.500	1,8500

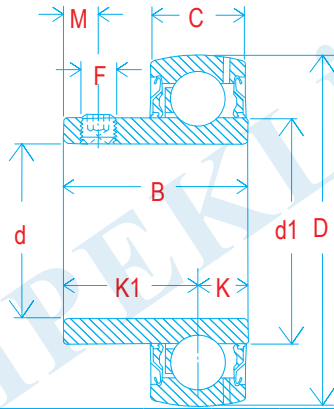


Rulman No	Boyutlar (mm)								Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	K	K1	M	F	Dinamik	Statik		
CSB 201	12	40	22	12	6,0	16,0	4,9	M5 X 0,8	9,6	4,8	4.500	0,0900
CSB 202	15	40	22	12	6,0	16,0	4,9	M5 X 0,8	9,6	4,8	4.500	0,0800
CSB 203	17	40	22	12	6,0	16,0	4,9	M5 X 0,8	9,6	4,8	4.500	0,0700
CSB 204	20	47	25	14	7,0	18,0	5,0	M6 X 1,00	12,8	6,7	4.000	0,1200
CSB 205	25	52	27	15	7,5	19,5	5,5	M6 X 1,00	14,0	8,1	3.400	0,1800
CSB 206	30	62	30	16	8,0	22,0	5,9	M6 X 1,00	19,5	11,4	2.800	0,2600
CSB 207	35	72	32	17	8,5	23,5	8,0	M8 X 1,00	25,7	15,6	2.400	0,4300
CSB 208	40	80	34	18	9,0	25,0	8,0	M8 X 1,00	29,5	18,1	2.200	0,6000
CSB 209	45	85	36	19	9,5	26,5	8,0	M8 X 1,00	31,9	20,8	1.900	0,8000
CSB 210	50	90	38	20	10,0	28,0	10,0	M10 X 1,25	35,0	23,7	1.800	0,8300
CSB 211	55	100	40	21	10,5	29,5	10,0	M10 X 1,25	43,3	29,4	1.600	1,1200
CSB 212	60	110	42	22	11,0	31,0	10,0	M10 X 1,25	47,7	33,4	1.500	1,5500

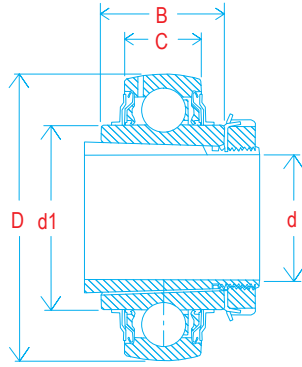








Rulman No	Boyutlar (mm)					Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	d1	D	B	C	Dinamik	Statik		
UK 205	20	25	52	23	17	14,3	8,5	3.400	0,2100
UK 206	25	30	62	26	19	19,5	11,4	2.800	0,3100
UK 207	30	35	72	28	20	25,7	15,6	2.400	0,4600
UK 208	35	40	80	29	21	29,5	18,1	2.200	0,6300
UK 209	40	45	85	30	22	31,9	20,8	1.900	0,6800
UK 210	45	50	90	32	24	35,0	23,7	1.800	0,7800
UK 211	50	55	100	36	25	43,3	29,4	1.600	1,0700
UK 212	55	60	110	38	27	47,7	33,4	1.500	1,5100
UK 213	60	65	120	40	28	57,2	40,0	1.400	1,8600
UK 215	65	75	130	43	30	62,1	44,8	1.200	2,2100
UK 216	70	80	140	45	33	72,6	53,3	1.100	2,7900
UK 217	75	85	150	46	35	83,2	65,5	1.000	3,3800
UK 218	80	90	160	47	37	95,8	72,6	950	4,4600

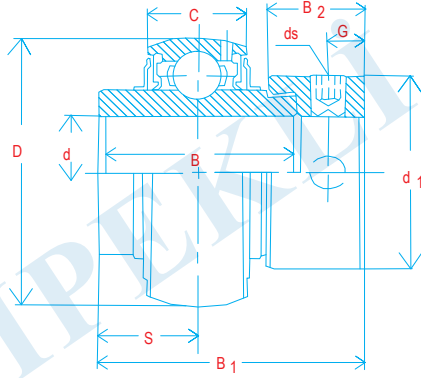


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	s	B1	B2	d1	G	ds	Dinamik	Statik		
NA 204	20	47	34,2	17	17,1	43,7	13,5	33,3	5,0	M6 X 1,00	12,8	6,7	2.800	0,2100
NA 205	25	52	34,9	17	17,1	44,4	13,5	38,1	5,0	M6 X 1,00	14,0	8,1	2.500	0,2500
NA 206	30	62	36,5	19	18,3	48,4	15,9	44,5	6,0	M6 X 1,00	19,5	11,4	2.100	0,3900
NA 207	35	72	37,6	20	18,8	51,1	17,5	55,6	6,5	M8 X 1,00	25,7	15,6	1.900	0,6000
NA 208	40	80	42,8	21	21,4	56,3	18,3	60,3	6,5	M8 X 1,00	29,5	18,1	1.700	0,7700
NA 209	45	85	42,8	22	21,4	56,3	18,3	63,5	6,5	M8 X 1,00	31,9	20,8	1.600	0,8400
NA 210	50	90	49,2	24	24,6	62,7	18,3	69,9	6,5	M8 X 1,00	35,0	23,7	1.400	1,0200
NA 211	55	100	55,5	25	27,8	71,4	20,7	76,2	8,0	M10 X 1,25	43,3	29,4	1.300	1,3700
NA 212	60	110	61,9	27	31,0	77,8	22,3	84,2	8,0	M10 X 1,25	47,7	33,4	1.200	1,8500
NA 213	65	120	68,6	28	34,3	85,7	23,5	86,0	8,5	M10 X 1,25	57,2	40,0	1.000	2,1000
NA 214	70	125	68,6	29	34,3	85,7	23,5	90,0	8,5	M10 X 1,25	62,2	43,9	900	2,3400
NA 215	75	130	75,0	30	37,3	92,1	23,5	102,0	8,5	M10 X 1,25	62,1	44,8	800	2,5000


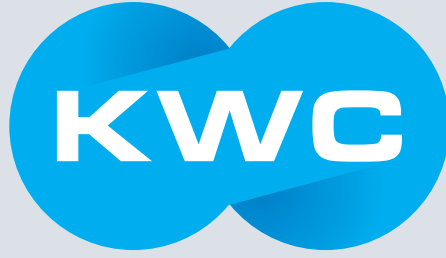


Yataklı Rulmanlar (Döküm)





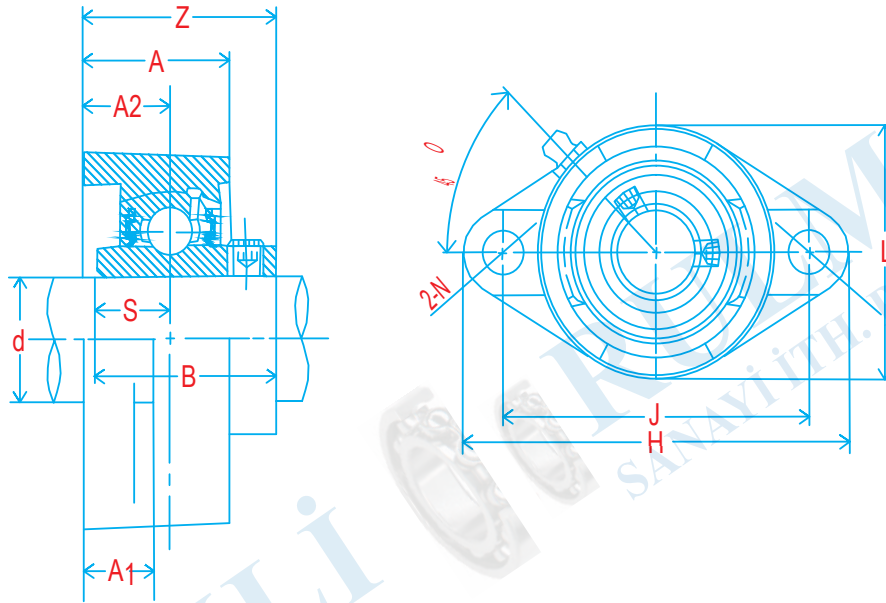



Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	H	J	A2	A1	A	N	L	B	s	z	Dinamik	Statik			
UCFL 201	12	113	90	15	11	25,5	12	60	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,51
UCFL 202	15	113	90	15	11	25,5	12	60	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,51
UCFL 203	17	113	90	15	11	25,5	12	60	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,51
UCFL 204	20	113	90	15	11	25,5	12	60	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,51
UCFL 205	25	130	99	16	13	27,0	16	68	34,1	14,3	35,8	14,03	8,05	3.400	M14	0,60
UCFL 206	30	148	117	18	13	31,0	16	80	38,1	15,9	40,2	19,47	11,43	2.800	M14	0,90
UCFL 207	35	160	130	19	15	34,0	16	90	42,9	17,5	44,4	25,69	15,55	2.400	M14	1,20
UCFL 208	40	175	144	21	15	36,0	16	100	49,2	19,0	51,2	29,51	18,14	2.200	M14	1,50
UCFL 209	45	188	148	22	16	38,0	19	108	49,2	19,0	52,2	31,85	20,80	1.900	M16	1,90
UCFL 210	50	197	157	22	16	40,0	19	115	51,6	19,0	54,6	34,99	23,70	1.800	M16	2,20
UCFL 211	55	224	184	25	18	43,0	19	125	55,6	22,2	58,4	43,34	29,39	1.600	M16	3,00
UCFL 212	60	250	202	29	18	48,0	23	140	65,1	25,4	68,7	47,68	33,43	1.500	M20	4,00
UCFL 213	65	258	210	30	22	50,0	23	155	65,1	25,4	69,7	57,20	40,01	1.400	M20	5,00
UCFL 214	70	265	216	31	22	54,0	23	160	74,6	30,2	75,4	62,19	43,90	1.300	M20	5,60
UCFL 215	75	275	225	34	22	56,0	23	165	77,8	33,3	78,5	62,08	44,82	1.200	M20	6,20
UCFL 216	80	290	233	34	22	58,0	25	180	82,6	33,3	83,3	72,62	53,34	1.100	M22	7,80
UCFL 217	85	305	248	36	24	63,0	25	190	85,7	34,1	87,6	83,15	64,54	1.000	M22	9,80
UCFL 218	90	320	265	40	24	68,0	25	205	96,0	39,7	96,3	95,84	72,64	950	M22	12,40

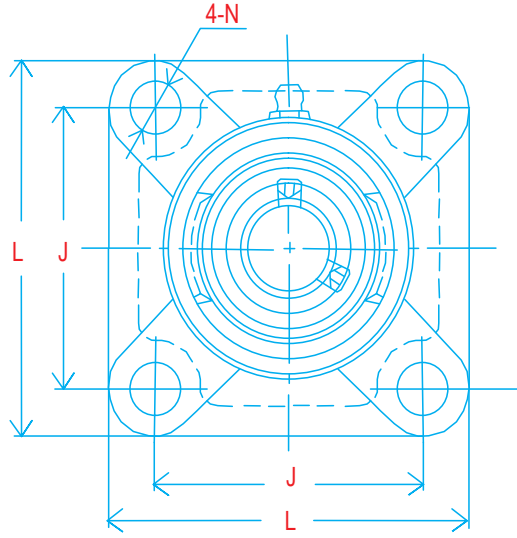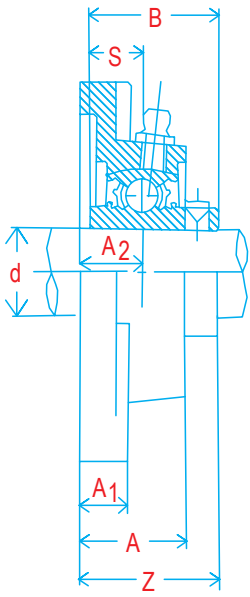



Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	L	J	A2	A1	A	N	B	S	Z	Dinamik	Statik			
UCF 201	12	86	64	15	12	25,5	12	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,61
UCF 202	15	86	64	15	12	25,5	12	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,61
UCF 203	17	86	64	15	12	25,5	12	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,61
UCF 204	20	86	64	15	12	25,5	12	31,0	12,7	33,3	12,82	6,65	4.000	M10	0,61
UCF 205	25	95	70	16	14	27	12	34,1	14,3	35,8	14,03	8,05	3.400	M10	0,80
UCF 206	30	108	83	18	14	31	12	38,0	15,9	40,2	19,47	11,43	2.800	M10	1,00
UCF 207	35	117	92	19	16	34	14	42,9	17,5	44,4	25,69	15,55	2.400	M12	1,40
UCF 208	40	130	102	21	16	36	16	49,2	19,0	51,2	29,51	18,14	2.200	M14	1,80
UCF 209	45	137	105	22	18	38	16	49,2	19,0	52,2	31,85	20,80	1.900	M14	2,20
UCF 210	50	143	111	22	18	40	16	51,6	19,0	54,6	34,99	23,70	1.800	M14	2,40
UCF 211	55	162	130	25	20	43	19	55,6	22,2	58,4	43,34	29,39	1.600	M16	3,50
UCF 212	60	175	143	29	20	48	19	65,1	25,4	68,7	47,68	33,43	1.500	M16	4,20
UCF 213	65	187	149	30	22	50	19	65,1	25,4	69,7	57,20	40,01	1.400	M16	5,30
UCF 214	70	193	152	31	22	54	19	74,6	30,2	75,4	62,19	43,90	1.300	M16	5,90
UCF 215	75	200	159	34	22	56	19	77,8	33,3	78,5	62,08	44,82	1.200	M16	6,30
UCF 216	80	208	165	34	22	58	23	82,6	33,3	83,3	72,62	53,34	1.100	M20	7,30
UCF 217	85	220	175	36	24	63	23	85,7	34,1	87,6	83,15	64,54	1.000	M20	8,90
UCF 218	90	235	187	40	25	68	23	96,0	39,7	96,3	95,84	72,64	950	M20	11,60

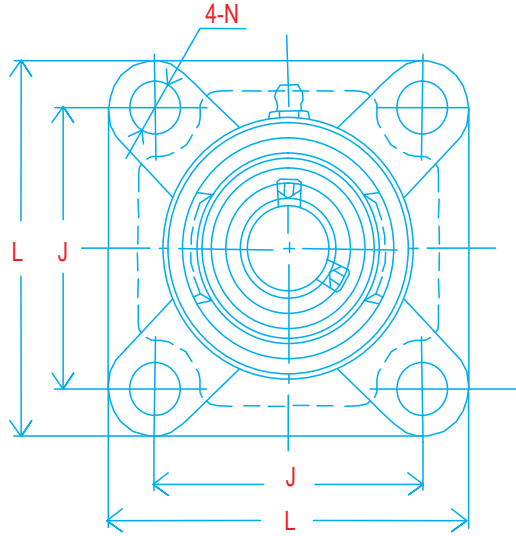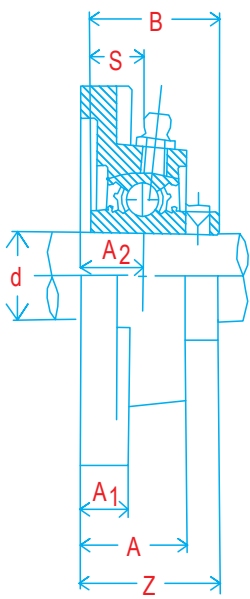


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	L	J	A2	A1	A	N	B	s	z	Dinamik	Statik			
UCF 305	25	110	80	16	13	29	16	38	15	39	22,46	11,57	2.800	M14	1,20
UCF 306	30	125	95	18	15	32	16	43	17	44	27,14	15,20	2.600	M14	1,80
UCF 307	35	135	100	20	16	36	19	48	19	49	33,53	19,22	2.200	M16	2,20
UCF 308	40	150	112	23	17	40	19	52	19	56	40,96	24,01	2.000	M16	2,90
UCF 309	45	160	125	25	18	44	19	57	22	61	53,33	32,19	1.800	M16	3,50
UCF 310	50	175	132	28	19	48	23	61	22	67	62,38	38,32	1.700	M20	4,80
UCF 311	55	185	140	30	20	52	23	66	25	71	72,05	44,97	1.400	M20	5,60
UCF 312	60	193	150	33	22	56	23	71	26	78	82,33	52,16	1.300	M20	6,70
UCF 313	65	208	166	33	22	58	23	75	30	78	94,54	60,82	1.200	M20	7,80
UCF 314	70	226	178	36	25	61	25	78	33	81	104,70	68,13	1.100	M22	10,10
UCF 315	75	236	184	39	25	66	25	82	32	89	113,97	78,66	1.000	M22	11,10
UCF 316	80	250	196	38	27	68	31	86	34	90	123,46	88,18	970	M27	12,80
UCF 317	85	260	204	44	27	74	31	96	40	100	133,16	98,25	950	M27	15,40
UCF 318	90	280	216	44	30	76	35	96	40	100	144,67	110,59	900	M30	19,00
UCF 319	95	290	228	59	30	94	35	103	41	121	156,68	122,07	850	M30	20,60
UCF 320	100	310	242	59	32	94	38	108	42	125	173,14	140,67	800	M33	25,70
UCF 321	105	310	242	59	32	94	38	112	44	128	189,41	165,62	750	M33	25,60
UCF 322	110	340	266	60	35	96	41	117	46	131	206,80	179,90	650	M36	38,00
UCF 324	120	370	290	65	40	110	41	126	51	140	228,00	208,60	500	M36	50,00
UCF 326	130	410	320	65	45	115	41	135	54	146	274,20	273,70	400	M36	66,00
UCF 328	140	450	350	75	55	125	41	145	59	141	296,90	306,50	300	M36	90,00

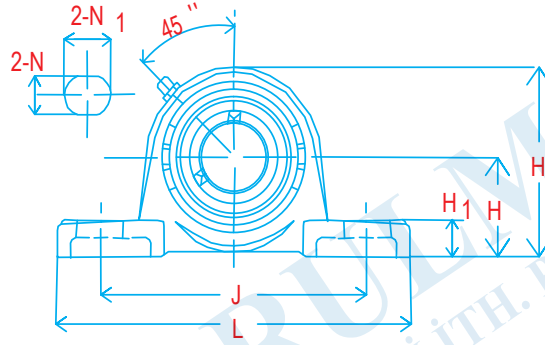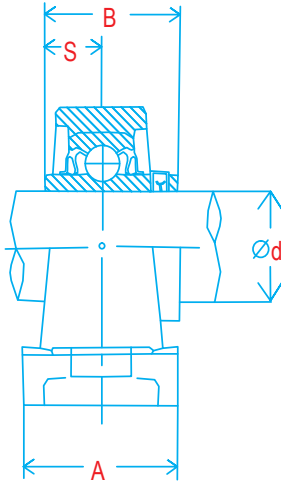


Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	N	N1	H1	Ho	B	S	Dinamik	Statik			
UCP 201	12	30,2	127	95	38	13	19	14	61	31,0	12,7	12,82	6,65	4.000	M10	0,76
UCP 202	15	30,2	127	95	38	13	19	14	61	31,0	12,7	12,82	6,65	4.000	M10	0,74
UCP 203	17	30,2	127	95	38	13	19	14	61	31,0	12,7	12,82	6,65	4.000	M10	0,72
UCP 204	20	33,3	127	95	38	13	19	14	64	31,0	12,7	12,82	6,65	4.000	M10	0,70
UCP 205	25	36,5	140	105	38	13	19	15	71	34,1	14,3	14,03	8,05	3.400	M10	0,76
UCP 206	30	42,9	160	121	44	17	21	16	82	38,1	15,9	19,47	11,43	2.800	M14	1,25
UCP 207	35	47,6	167	126	48	17	21	17	92	42,9	17,5	25,69	15,55	2.400	M14	1,55
UCP 208	40	49,2	180	137	52	17	21	18	99	49,2	19,0	29,51	18,14	2.200	M14	1,90
UCP 209	45	54,0	190	146	54	17	21	20	106	49,2	19,0	31,85	20,80	1.900	M14	2,20
UCP 210	50	57,2	206	159	60	20	25	21	114	51,6	19,0	34,99	23,70	1.800	M16	2,75
UCP 211	55	63,5	217	172	60	20	25	23	125	55,6	22,2	43,34	29,39	1.600	M16	3,30
UCP 212	60	69,9	238	186	70	20	25	24	137	65,1	25,4	47,68	33,43	1.500	M16	4,70
UCP 213	65	76,2	262	203	70	25	30	26	149	65,1	25,4	57,20	40,01	1.400	M20	5,60
UCP 214	70	79,4	266	210	72	25	30	27	155	74,6	30,2	62,19	43,90	1.300	M20	6,60
UCP 215	75	82,6	274	217	74	25	30	28	162	77,8	33,3	62,08	44,82	1.200	M20	7,30
UCP 216	80	88,9	292	232	78	25	30	30	174	82,6	33,3	72,62	53,34	1.100	M20	9,00
UCP 217	85	95,2	310	247	83	25	28	32	186	85,7	34,1	83,15	64,54	1.000	M20	10,80
UCP 218	90	101,6	326	262	88	27	30	33	198	96,0	39,7	95,84	72,64	950	M22	13,00
UCP 220	100	115,0	380	305	95	30	36	40	225	108,0	42,0	122,00	92,80	800	M24	16,00

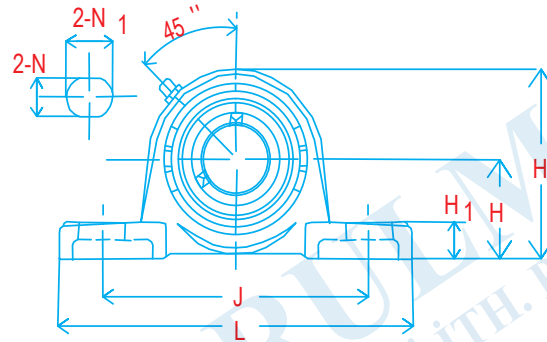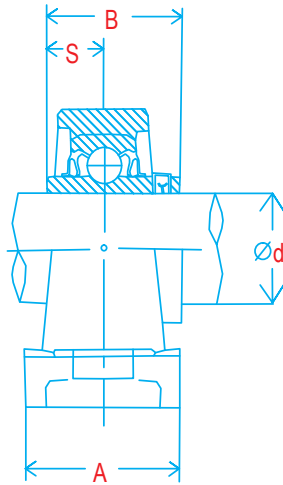



Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	N	N1	H1	Ho	B	s	Dinamik	Statik			
UCP 305	25	45	175	132	45	17	20	16	85	38	15	22,5	11,6	2.800	M14	1,40
UCP 306	30	50	180	140	50	17	20	18	95	43	17	27,1	15,2	2.600	M14	1,80
UCP 307	35	56	210	160	56	17	25	20	106	48	19	33,5	19,2	2.200	M14	2,80
UCP 308	40	60	220	170	60	17	25	24	116	52	19	41,0	24,0	2.000	M14	3,08
UCP 309	45	67	245	190	67	20	30	25	129	57	22	53,3	32,2	1.800	M16	4,10
UCP 310	50	75	275	212	75	20	35	27	143	61	22	62,4	38,3	1.700	M16	6,00
UCP 311	55	80	310	236	80	20	38	30	154	66	25	72,1	45,0	1.400	M16	7,40
UCP 312	60	85	330	250	85	25	38	32	165	71	26	82,3	52,2	1.300	M20	9,40
UCP 313	65	90	335	260	90	25	38	33	176	75	30	94,5	60,8	1.200	M20	10,00
UCP 314	70	95	360	280	90	27	40	35	187	78	33	104,7	68,1	1.100	M22	12,00
UCP 315	75	100	380	290	100	27	40	35	198	82	32	114,0	78,7	1.000	M22	14,00
UCP 316	80	106	400	300	110	27	40	40	210	86	34	123,5	88,2	970	M22	18,00
UCP 317	85	112	420	320	110	33	45	40	220	96	40	133,2	98,3	950	M27	20,00
UCP 318	90	118	430	330	110	33	45	45	235	96	40	144,7	110,6	900	M27	24,00
UCP 319	95	125	470	360	120	36	50	46	250	103	41	156,7	122,1	850	M30	26,50
UCP 320	100	140	490	380	120	36	50	50	275	108	42	173,1	140,7	800	M30	34,30
UCP 321	105	140	490	380	120	36	50	50	280	112	44	189,4	165,6	750	M30	36,30
UCP 322	110	150	520	400	140	40	55	55	300	117	46	206,8	179,9	650	M33	42,50
UCP 324	120	160	570	450	140	40	55	65	320	126	51	228,0	208,6	500	M33	53,50
UCP 326	130	180	600	480	140	40	55	75	355	135	54	274,2	273,7	400	M33	72,10
UCP 328	140	200	620	500	140	40	55	75	390	145	59	296,9	306,5	300	M33	89,10

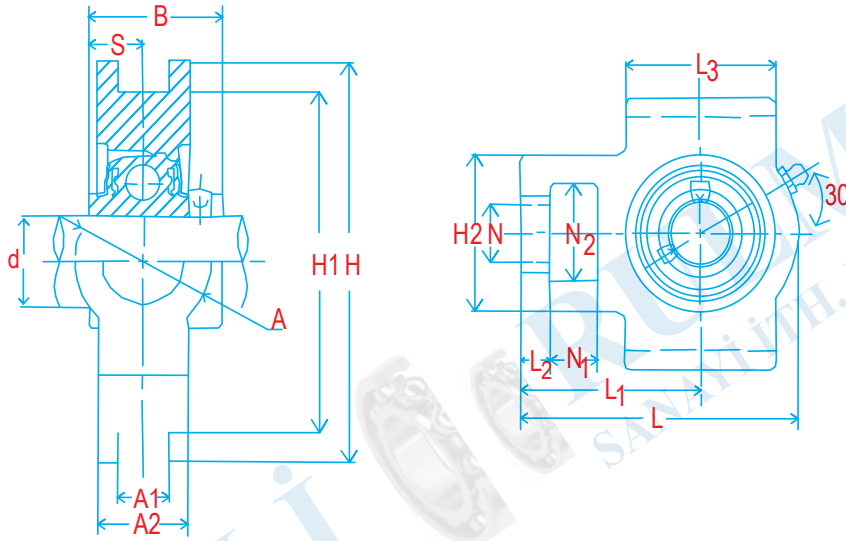



Rulman No	Boyutlar (mm)																Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	N1	L2	H2	N2	N	L3	A1	H1	H	L	A	A2	L1	B	S	Dinamik	Statik		
UCT 201	12	16	10	51	32	19	51	12	76	89	94	32	21	61	31,0	12,7	12,82	6,65	4.000	0,80
UCT 202	15	16	10	51	32	19	51	12	76	89	94	32	21	61	31,0	12,7	12,82	6,65	4.000	0,79
UCT 203	17	16	10	51	32	19	51	12	76	89	94	32	21	61	31,0	12,7	12,82	6,65	4.000	0,78
UCT 204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31,0	12,7	12,82	6,65	4.000	0,72
UCT 205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34,1	14,3	14,03	8,05	3.400	0,80
UCT 206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38,1	15,9	19,47	11,43	2.800	1,26
UCT 207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42,9	17,5	25,69	15,55	2.400	1,68
UCT 208	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49,2	19,0	29,51	18,14	2.200	2,28
UCT 209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49,2	19,0	31,85	20,8	1.900	2,52
UCT 210	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51,6	19,0	34,99	23,7	1.800	2,75
UCT 211	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55,6	22,2	43,34	29,39	1.600	4,10
UCT 212	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65,1	25,4	47,68	33,43	1.500	4,90
UCT 213	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65,1	25,4	57,2	40,01	1.400	6,70
UCT 214	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74,6	30,2	62,19	43,9	1.300	6,90
UCT 215	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77,8	33,3	62,08	44,82	1.200	7,40
UCT 216	80	32	21	111	70	41	121	26	165	184	235	70	51	140	82,6	33,3	72,62	53,34	1.100	8,10
UCT 217	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85,7	34,1	83,15	64,54	1.000	11,00
UCT 218	90	40	30	130	80	48	140	30	190	215	275	80	55	170	96,0	39,7	95,84	72,64	950	12,20

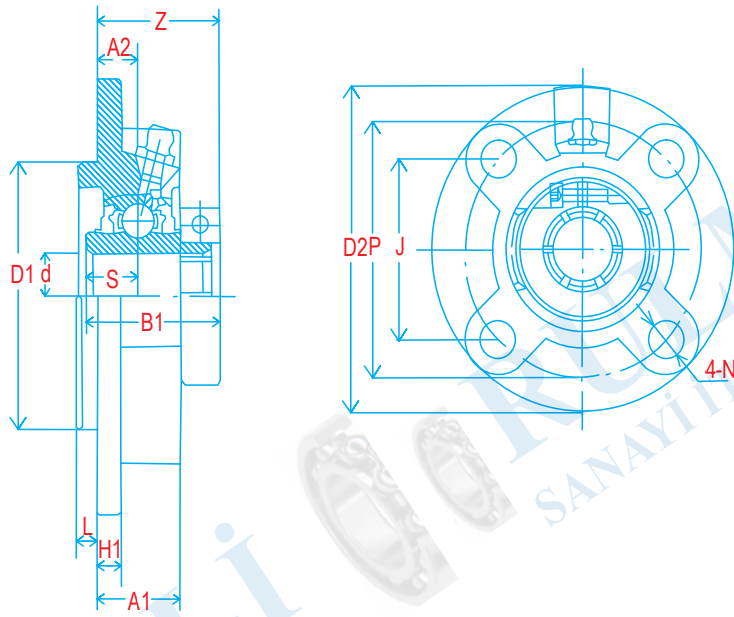




Rulman No	Boyutlar (mm)													Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	D2	P	J	A2	N	L	H1	A1	D1	B1	S	Z	Dinamik	Statik			
UCFC 204	20	100	78	55,1	10	12	5	7	20,5	62	31,0	12,7	28,3	12,82	6,65	4.000	M10	0,75
UCFC 205	25	115	90	63,6	10	12	6	7	21,0	70	34,1	14,3	29,8	14,03	8,05	3.400	M10	1,00
UCFC 206	30	125	100	70,7	10	12	8	8	23,0	80	38,1	15,9	32,2	19,47	11,43	2.800	M10	1,30
UCFC 207	35	135	110	77,8	11	14	8	9	26,0	90	42,9	17,5	36,4	25,69	15,55	2.400	M12	1,75
UCFC 208	40	145	120	84,8	11	14	10	9	26,0	100	49,2	19,0	41,2	29,51	18,14	2.200	M12	2,00
UCFC 209	45	160	132	93,3	10	16	12	14	26,0	105	49,2	19,0	40,2	31,85	20,80	1.900	M14	2,50
UCFC 210	50	165	138	97,6	10	16	12	14	28,0	110	51,6	19,0	42,6	34,99	23,70	1.800	M14	2,95
UCFC 211	55	185	150	106,1	13	19	12	15	30,0	125	55,6	22,2	46,4	43,34	29,39	1.600	M16	4,00
UCFC 212	60	195	160	113,1	17	19	12	15	35,0	135	65,1	25,4	56,7	47,68	33,43	1.500	M16	4,90
UCFC 213	65	205	170	120,2	16	19	14	15	36,0	145	65,1	25,4	55,7	57,20	40,01	1.400	M16	5,35
UCFC 214	70	215	177	125,1	17	19	14	18	38,0	150	74,6	30,2	61,4	62,19	43,90	1.300	M16	6,90
UCFC 215	75	220	184	130,1	18	19	16	18	39,0	160	77,8	33,3	62,5	62,08	44,82	1.200	M16	7,50
UCFC 216	80	240	200	141,4	18	23	16	18	42,0	170	82,6	33,3	67,3	72,62	53,34	1.100	M20	8,70
UCFC 217	85	250	208	147,1	18	23	18	20	45,0	180	85,7	34,1	69,6	83,15	64,54	1.000	M20	10,30
UCFC 218	90	265	220	155,5	22	23	18	20	50,0	190	96,0	39,7	78,3	95,84	72,64	950	M20	13,50

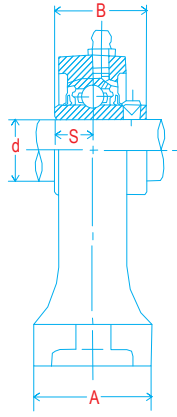


Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	N	N1	H1	Ho	B	s	Dinamik	Statik			
UCPH 201	12	70	127	95	40	13	19	15	101	31,0	12,1	12,82	6,65	4.000	M10	0,96
UCPH 202	15	70	127	95	40	13	19	15	101	31,0	12,1	12,82	6,65	4.000	M10	0,96
UCPH 203	17	70	127	95	40	13	19	15	101	31,0	12,1	12,82	6,65	4.000	M10	0,96
UCPH 204	20	70	127	95	40	13	19	15	101	31,0	12,1	12,82	6,65	4.000	M10	0,96
UCPH 205	25	80	140	105	50	13	19	16	114	34,1	14,0	14,03	8,05	3.400	M10	1,20
UCPH 206	30	90	165	121	50	17	21	18	130	38,1	15,1	19,47	11,43	2.800	M14	1,60
UCPH 207	35	95	167	127	60	17	21	19	140	42,9	17,1	25,69	15,55	2.400	M14	2,10
UCPH 208	40	100	178	137	70	17	21	20	150	49,2	19,0	29,51	18,14	2.200	M14	2,70
UCPH 209	45	105	190	146	70	17	21	20	158	49,2	19,0	31,85	20,80	1.900	M14	3,10
UCPH 210	50	110	206	159	70	20	23	22	165	51,6	19,0	34,99	23,70	1.800	M16	3,50
UCPH 211	55	120	219	171	75	20	23	23	181	55,6	22,0	43,34	29,39	1.600	M16	4,07
UCPH 212	60	130	235	186	85	20	23	24	197	65,1	25,0	47,68	33,43	1.500	M16	6,31

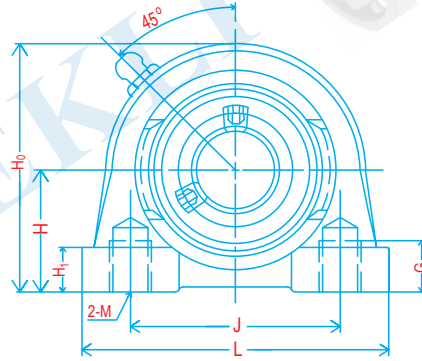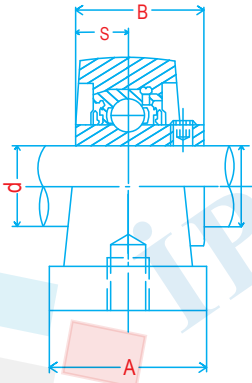


Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	G	H1	Ho	M	B	S	Dinamik	Statik			
UCPA 201	12	30,2	76	52	38	13	11	62	M10	31,0	12,07	12,82	6,65	4.000	M10	0,67
UCPA 202	15	30,2	76	52	38	13	11	62	M10	31,0	12,07	12,82	6,65	4.000	M10	0,63
UCPA 203	17	30,2	76	52	38	13	11	62	M10	31,0	12,07	12,82	6,65	4.000	M10	0,62
UCPA 204	20	30,2	76	52	38	13	11	62	M10	31,0	12,07	12,82	6,65	4.000	M10	0,60
UCPA 205	25	36,5	84	56	38	15	12	72	M10	34,1	14,03	14,03	8,05	3.400	M10	0,81
UCPA 206	30	42,9	94	66	48	18	12	84	M14	38,1	15,09	19,47	11,43	2.800	M14	1,20
UCPA 207	35	47,6	110	80	48	20	13	95	M14	42,9	17,05	25,69	15,55	2.400	M14	1,70
UCPA 208	40	49,2	116	84	54	20	13	100	M14	49,2	19,00	29,51	18,14	2.200	M14	1,90
UCPA 209	45	54,2	120	90	54	25	13	108	M14	49,2	19,00	31,85	20,80	1.900	M14	2,20
UCPA 210	50	57,2	130	94	60	25	14	116	M16	51,6	19,00	34,99	23,70	1.800	M16	2,60
UCPA 211	55	63,5	140	104	66	25	14	125	M16	55,6	22,02	43,34	29,39	1.600	M16	3,00
UCPA 212	60	69,9	150	114	68	25	17	138	M16	65,1	25,04	47,68	33,43	1.500	M16	4,24

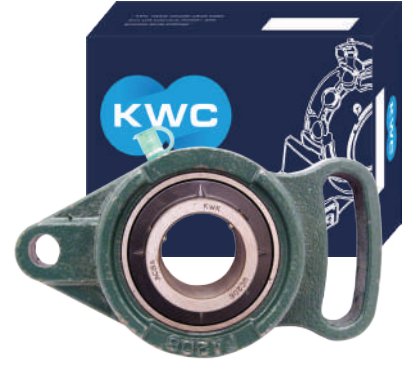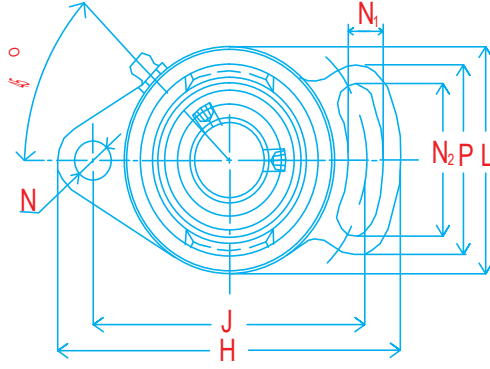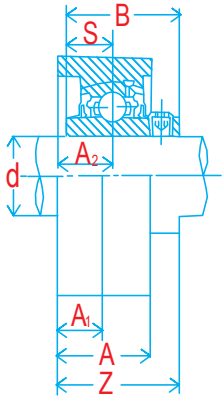


Rulman No	Boyutlar (mm)														Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	H	J	A2	A1	A	N	N1	N2	L	P	B	S	Z	Dinamik	Statik			
UCFA 201	12	98	78	15	12	25,5	10	10	40	60	50	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,53
UCFA 202	15	98	78	15	12	25,5	10	10	40	60	50	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,49
UCFA 203	17	98	78	15	12	25,5	10	10	40	60	50	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,48
UCFA 204	20	98	78	15	12	25,5	10	10	40	60	50	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,46
UCFA 205	25	125	98	16	14	27,0	12	13	51	70	65	34,1	14,0	35,8	14,03	8,05	3.400	M10	0,69
UCFA 206	30	142	117	18	14	31,0	12	13	58	83	72	38,1	15,1	40,2	19,47	11,43	2.800	M10	1,00
UCFA 207	35	154	130	19	16	34,0	15	15	66	95	82	42,9	17,1	44,4	25,69	15,55	2.400	M12	1,50
UCFA 208	40	172	144	21	16	38,0	15	15	71	105	87	49,2	19,0	51,2	29,51	18,14	2.200	M12	1,80
UCFA 209	45	180	148	22	18	40,0	15	15	72	110	90	49,2	19,0	52,2	31,85	20,80	1.900	M14	2,10
UCFA 210	50	190	157	22	18	40,0	15	15	76	115	94	51,6	19,0	54,6	34,99	23,70	1.800	M14	2,30
UCFA 211	55	216	184	25	20	43,0	16	17	86	132	104	55,6	22,2	58,4	43,34	29,39	1.600	M14	3,60
UCFA 212	60	250	202	29	20	48,0	18	19	100	140	120	65,1	25,4	68,7	52,50	32,80	1.400	M16	4,20

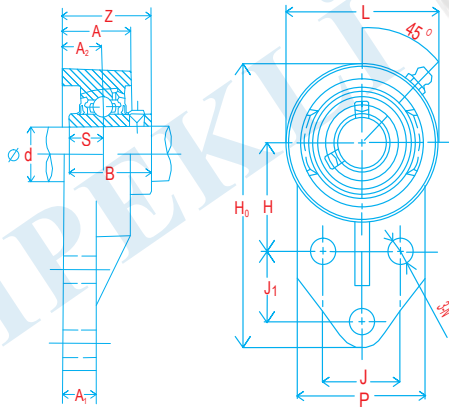



Rulman No	Boyutlar (mm)														Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	Ho	H	J	J1	A2	A1	A	N	L	P	B	S	Z	Dinamik	Statik			
UCFB 201	12	110	42	32	27	15	13	25,5	10	62	52	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,62
UCFB 202	15	110	42	32	27	15	13	25,5	10	62	52	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,58
UCFB 203	17	110	42	32	27	15	13	25,5	10	60	52	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,57
UCFB 204	20	110	42	32	27	15	13	25,5	10	62	52	31,0	12,1	33,3	12,82	6,65	4.000	M8	0,62
UCFB 205	25	116	45	34	27	16	13	27,0	10	68	56	34,1	14,0	35,7	14,03	8,05	3.400	M8	0,69
UCFB 206	30	130	50	40	29	18	13	31,0	10	78	65	38,1	15,1	40,2	19,47	11,43	2.800	M8	0,93
UCFB 207	35	144	55	46	32	19	15	34,0	10	90	70	42,9	17,1	44,4	25,69	15,55	2.400	M8	1,30
UCFB 208	40	164	60	50	41	21	16	36,0	12	100	78	49,2	19,0	51,2	29,51	18,14	2.200	M10	1,80
UCFB 209	45	174	65	54	43	22	18	38,0	12	106	80	49,2	19,0	52,2	31,85	20,80	1.900	M10	2,00
UCFB 210	50	184	68	58	46	22	18	40,0	12	112	86	51,6	19,0	54,6	34,99	23,70	1.800	M10	2,30

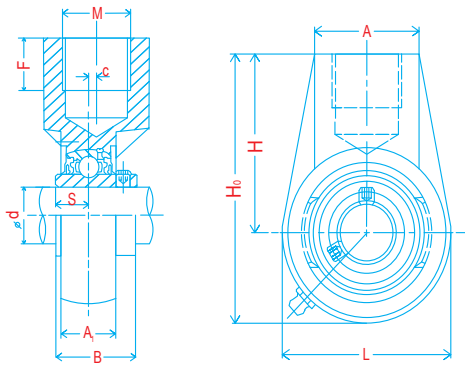



Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	L	Ho	H	A	M(in)	F	C	A1	B	S	Dinamik	Statik		
UCHA 204	20	64	96	64	40	G3/4	19	0,0	21	31,0	12,7	12,82	6,65	4.000	0,70
UCHA 205	25	78	103	64	40	G3/4	19	0,0	24	34,1	14,3	12,82	6,65	4.000	0,74
UCHA 206	30	78	103	64	40	G3/4	19	0,0	28	38,1	15,9	12,82	6,65	4.000	0,91
UCHA 207	35	92	116	70	40	G3/4	19	0,0	30	42,9	17,5	12,82	6,65	4.000	1,19
UCHA 208	40	100	123	73	40	G3/4	19	2,0	33	49,2	19,0	143	8,05	3.400	1,36
UCHA 209	45	108	136	82	48	G1	21	5,0	35	49,2	19,0	19,47	11,43	2.800	1,78
UCHA 210	50	119	142	83	48	G1	21	5,0	37	51,6	19,0	25,69	15,55	2.400	1,93
UCHA 211	55	126	150	87	60	G5/4	25	7,0	38	55,6	22,2	29,51	18,14	2.200	3,50
UCHA 212	60	142	173	102	60	G5/4	28	9,0	42	65,1	25,4	31,85	20,80	1.900	3,90
UCHA 213	65	166	200	117	70	G1-1/2	32	9,5	44	65,1	25,4	34,99	23,70	1.800	4,40

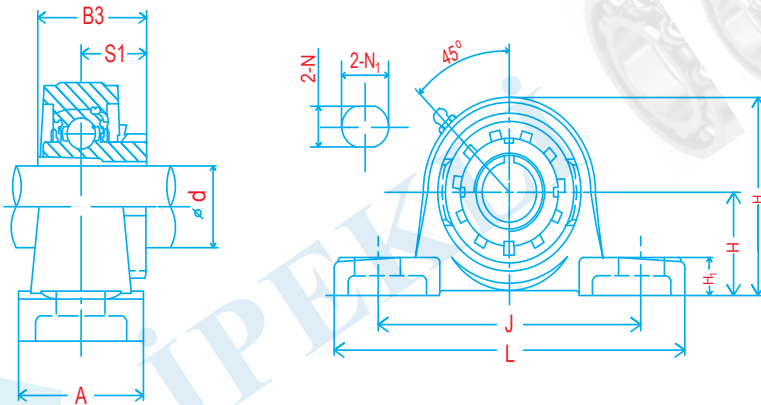



Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir-Hız Sınırı (dev./dak.)	Cıvata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	N	N1	H1	Ho	B3	S1	Dinamik	Statik			
UKP 205	20	36,5	140	105	38	13	19	15	71	35	18,1	14,03	8,05	3.400	M10	0,83
UKP 206	25	42,9	160	121	44	17	21	6	82	38	20,1	19,47	11,43	2.800	M14	1,30
UKP 207	30	47,6	167	126	48	17	21	17	92	43	22,1	25,69	15,55	2.400	M14	1,50
UKP 208	35	49,2	180	137	53	17	21	18	99	46	24,1	29,51	18,14	2.200	M14	2,00
UKP 209	40	54,0	190	146	54	17	21	20	106	50	26,0	31,85	20,80	1.900	M14	2,30
UKP 210	45	57,2	206	159	60	20	25	21	114	55	27,1	34,99	23,70	1.800	M16	3,00
UKP 211	50	63,5	217	172	60	20	25	23	125	59	28,1	43,34	29,39	1.600	M16	3,50
UKP 212	55	69,9	238	186	70	20	25	25	137	62	31,0	47,68	33,43	1.500	M16	4,70
UKP 213	60	76,2	262	203	70	25	30	26	149	65	32,0	57,20	40,01	1.400	M20	5,90
UKP 215	65	82,6	274	217	74	25	30	28	162	73	35,5	62,08	44,82	1.200	M20	7,60
UKP 216	70	88,9	292	232	78	25	30	30	174	78	39,0	72,62	53,34	1.100	M20	9,20
UKP 217	75	95,2	310	247	83	25	28	32	186	82	40,0	83,15	64,54	1.000	M20	10,93
UKP 218	80	101,6	326	262	88	27	30	33	198	86	42,0	95,84	72,64	950	M22	12,65

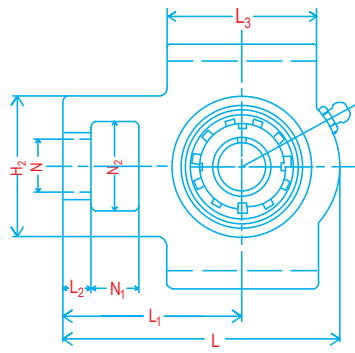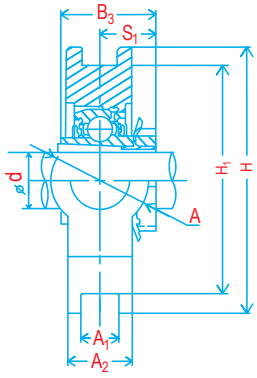


Rulman No	Boyutlar (mm)																Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	N1	L2	H2	N2	N	L3	A1	H1	H	L	A	A2	L1	B3	S1	Dinamik	Statik			
UKT 205	20	16	10	51	32	19	51	12	76	89	97	32	24	62	35	18,1	14,03	8,05	3.400	0,80	0,96
UKT 206	25	16	10	56	37	22	57	12	89	102	113	37	28	70	38	20,1	19,47	11,43	2.800	1,26	0,96
UKT 207	30	16	13	64	37	22	64	12	89	102	129	37	30	78	43	22,1	25,69	15,55	2.400	1,68	0,96
UKT 208	35	19	16	83	49	29	83	16	102	114	144	49	33	88	46	24,1	29,51	18,14	2.200	2,28	0,96
UKT 209	40	19	16	83	49	29	83	16	102	117	144	49	35	87	50	26,0	31,85	20,80	1.900	2,52	1,20
UKT 210	45	19	16	83	49	29	86	16	102	117	149	49	37	90	55	27,1	34,99	23,70	1.800	2,75	1,60
UKT 211	50	25	19	102	64	35	95	22	130	146	171	64	38	106	59	28,1	43,34	29,39	1.600	4,10	2,10
UKT 212	55	32	19	102	64	35	102	22	130	146	194	64	42	119	62	31,0	47,68	33,43	1.500	4,90	2,70
UKT 213	60	32	21	111	70	41	121	26	151	167	224	70	44	137	65	32,0	57,20	40,01	1.400	6,70	3,10
UKT 215	65	32	21	111	70	41	121	26	151	167	232	70	48	140	73	35,5	62,19	43,90	1.200	7,40	3,50
UKT 216	70	32	21	111	70	41	121	26	165	184	235	70	51	140	78	39,0	62,08	44,82	1.100	8,10	4,07
UKT 217	75	38	29	124	73	48	157	30	173	198	260	73	54	162	82	40,0	72,62	53,34	1.000	11,00	6,31

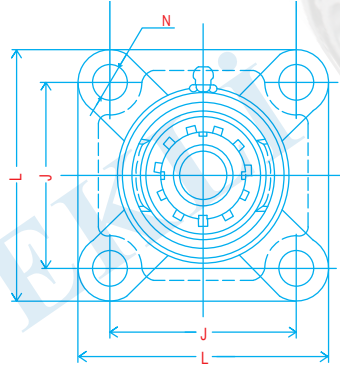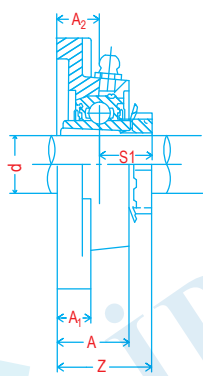


Rulman No	Boyutlar (mm)									Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	L	J	A2	A1	A	N	S1	z	Dinamik	Statik			
UKF 205	20	95	70	16	14	27	12	18,1	34,5	14,03	8,05	3.400	M10	0,84
UKF 206	25	108	83	18	14	31	12	20,1	38,5	19,47	11,43	2.800	M10	1,10
UKF 207	30	117	92	19	16	34	14	22,1	41,5	25,69	15,55	2.400	M12	1,60
UKF 208	35	130	102	21	16	36	16	24,1	45,5	29,51	18,14	2.200	M14	1,90
UKF 209	40	137	105	22	18	38	16	26,0	48,0	31,85	20,80	1.900	M14	2,30
UKF 210	45	143	111	22	18	40	16	27,1	49,5	34,99	23,70	1.800	M14	2,60
UKF 211	50	162	130	25	20	43	19	28,1	53,5	43,34	29,39	1.600	M16	3,40
UKF 212	55	175	143	29	20	48	19	31,0	60,0	47,68	33,43	1.500	M16	4,10
UKF 213	60	187	149	30	22	50	19	32,0	62,0	57,20	40,01	1.400	M16	5,50
UKF 215	65	200	159	34	22	56	19	35,5	69,5	62,19	43,90	1.200	M16	6,70
UKF 216	70	208	165	34	22	58	23	39,0	73,0	62,08	44,82	1.100	M20	7,50
UKF 217	75	220	175	36	24	63	23	40,0	76,0	72,62	53,34	1.000	M20	9,10
UKF 218	80	235	187	40	25	68	23	42,0	82,0	83,15	64,54	950	M20	11,80

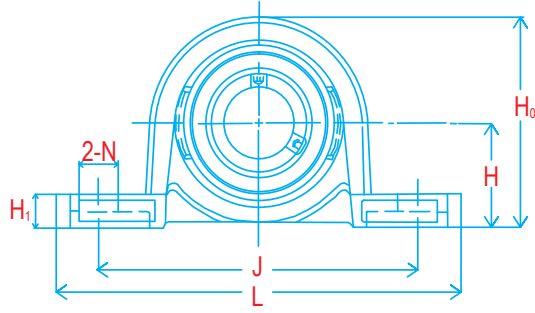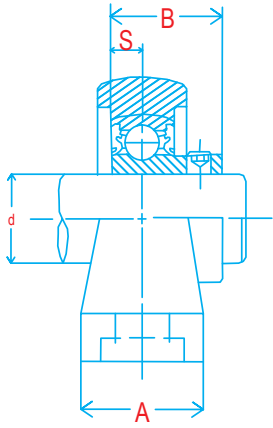


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Cıvata Ölçüsü	Rulman No	Yatak No	Ağırlık (kg)
	d	H	L	J	A	H1	Ho	N	S	B	Dinamik	Statik				
UP 000	10	18	67	53	16	6	35	7	4,0	17,7	4,55	1,50	M6	U000	P000	0,08
UP 001	12	19	71	56	16	6	38	7	4,0	17,7	5,10	2,40	M6	U001	P001	0,10
UP 002	15	22	80	63	16	7	43	7	4,5	18,7	5,60	2,85	M6	U002	P002	0,14
UP 003	17	24	85	67	18	7	47	7	5,0	20,7	6,00	3,25	M6	U003	P003	0,17
UP 004	20	28	100	80	20	9	55	10	6,0	24,7	9,40	5,05	M8	U004	P004	0,26
UP 005	25	32	112	90	20	10	62	10	6,0	25,0	10,10	5,85	M8	U005	P005	0,33
UP 006	30	36	132	106	26	11	70	13	6,5	26,0	13,20	8,25	M10	U006	P006	0,50

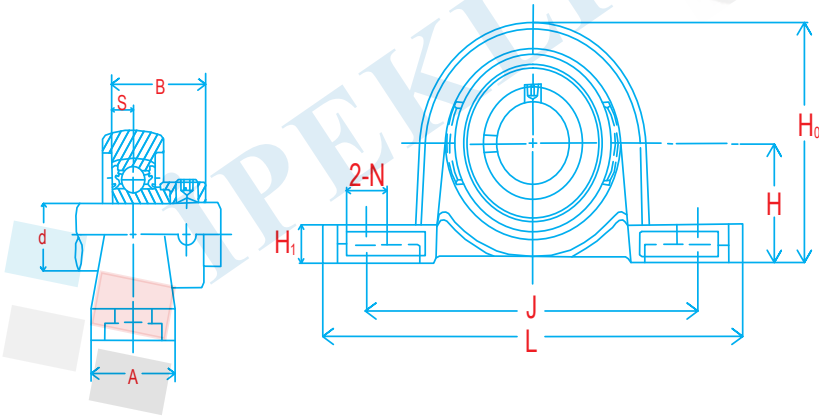


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Cıvata Ölçüsü	Rulman No	Yatak No	Ağırlık (kg)
	d	H	L	J	A	H1	Ho	N	S	B	Dinamik	Statik				
KP 000	10	18	67	53	16	6	35	7	4	14,0	4,60	2,00	M6	K000	P000	0,08
KP 001	12	19	71	56	16	6	38	7	4	14,5	5,10	2,40	M6	K001	P001	0,10
KP 002	15	22	80	63	16	7	43	7	4,5	16,5	5,60	2,80	M6	K002	P002	0,14
KP 003	17	24	85	67	18	7	47	7	5	17,5	6,00	3,30	M6	K003	P003	0,17
KP 004	20	28	100	80	20	9	55	10	6	21,0	9,35	5,10	M8	K004	P004	0,25
KP 005	25	32	112	90	20	10	62	10	6	22,5	10,10	5,80	M8	K005	P005	0,33
KP 006	30	36	132	106	26	11	70	13	6,5	24,5	13,20	8,30	M10	K006	P006	0,50

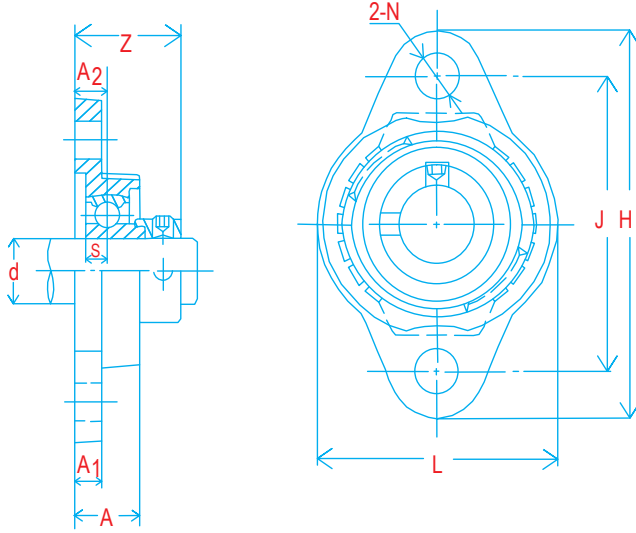





Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Cıvata Ölçüsü	Rulman No	Yatak No	Ağırlık (kg)
	d	H	J	A2	A1	A	N	L	s	Z	Dinamik	Statik				
UFL 000	10	60	45	6,0	6,0	12	7	36	4	19,7	4,55	1,50	M6	U000	FL000	0,07
UFL 001	12	63	48	6,0	6,0	12	7	38	4	19,7	5,10	2,40	M6	U001	FL001	0,08
UFL 002	15	67	53	6,5	6,5	13	7	42	4,5	20,7	5,60	2,85	M6	U002	FL002	0,11
UFL 003	17	71	56	7,0	7,0	14	7	46	5	22,7	6,00	3,25	M6	U003	FL003	0,14
UFL 004	20	90	71	8,0	8,0	16	10	55	6	24,2	9,40	5,05	M8	U004	FL004	0,23
UFL 005	25	95	75	8,0	8,0	16	10	60	6	27,0	10,10	5,85	M8	U005	FL005	0,27
UFL 006	30	112	85	9,0	9,0	18	13	70	6,5	28,5	13,20	8,25	M10	U006	FL006	0,39

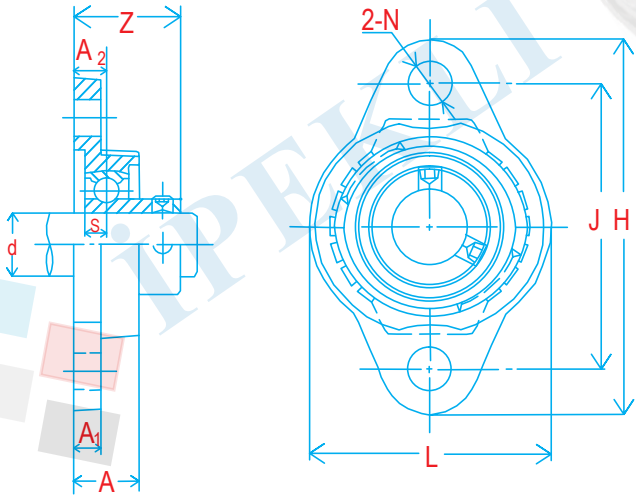


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Cıvata Ölçüsü	Rulman No	Yatak No	Ağırlık (kg)
	d	H	J	A2	A1	A	N	L	S	Z	Dinamik	Statik				
KFL 000	10	60	45	6	6	12	7	36	4	16,0	4,60	2,00	M6	K000	FL000	0,07
KFL 001	12	63	48	6	6	12	7	38	4	16,5	5,10	2,40	M6	K001	FL001	0,08
KFL 002	15	67	53	6,5	6,5	13	7	42	4,5	18,5	5,60	2,80	M6	K002	FL002	0,11
KFL 003	17	71	56	7	7	14	7	46	5	19,5	6,00	3,30	M6	K003	FL003	0,14
KFL 004	20	90	71	8	8	16	10	55	6	23,0	9,35	5,10	M8	K004	FL004	0,23
KFL 005	25	95	75	8	8	16	10	60	6	24,5	10,10	5,80	M8	K005	FL005	0,27
KFL 006	30	112	85	9	9	18	13	70	6,5	27,0	13,20	8,30	M10	K006	FL006	0,39

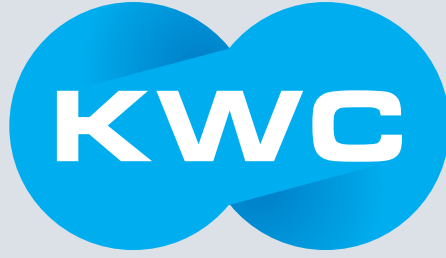


Yataklı Rulmanlar (Sac)

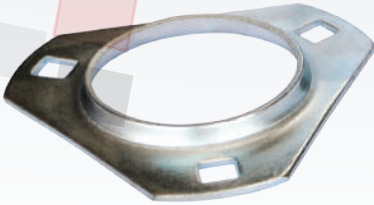


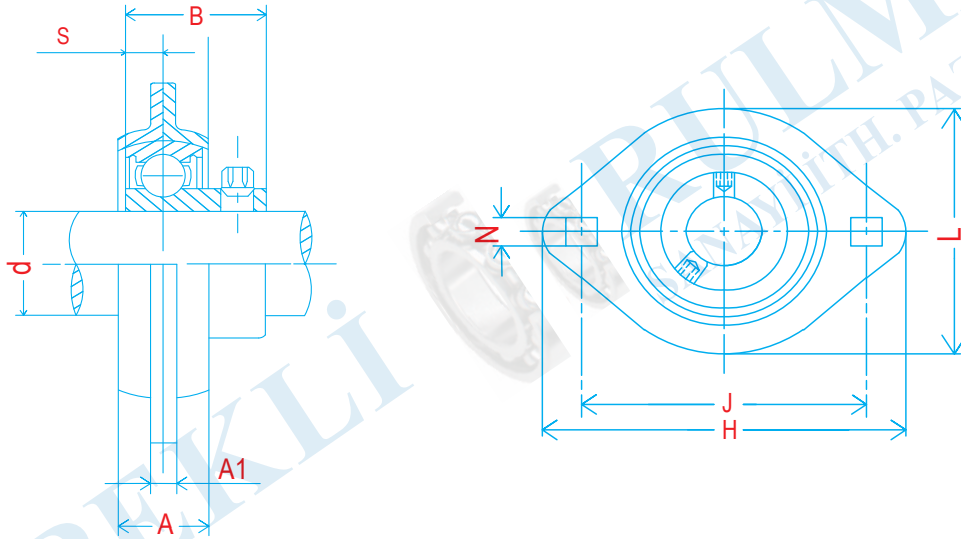


Rulman No	Boyutlar (mm)									Yük Sayısı (KN)		Civata Ölçüsü	Ağırlık (kg)
	d	H	J	L	A	A1	N	B	S	Dinamik	Statik		
SBPFL 201	12	81	63,5	59	14	4	7,0	22	6,0	9,60	4,60	M6	0,23
SBPFL 202	15	81	63,5	59	14	4	7,0	22	6,0	9,60	4,60	M6	0,23
SBPFL 203	17	81	63,5	59	14	4	7,0	22	6,0	9,60	4,60	M6	0,23
SBPFL 204	20	90	71,5	67	16	4	9,0	25	7,0	12,80	6,65	M8	0,26
SBPFL 205	25	95	76,0	71	18	4	9,0	27	7,5	14,00	7,85	M8	0,35
SBPFL 206	30	113	90,5	84	18	5	11,0	30	8,0	19,50	11,30	M10	0,46
SBPFL 207	35	122	100,0	94	20	5	11,0	32	8,5	25,70	15,30	M10	0,73
SBPFL 208	40	147	119,0	106	23	7	13,5	34	9,0	29,50	18,10	M12	0,94

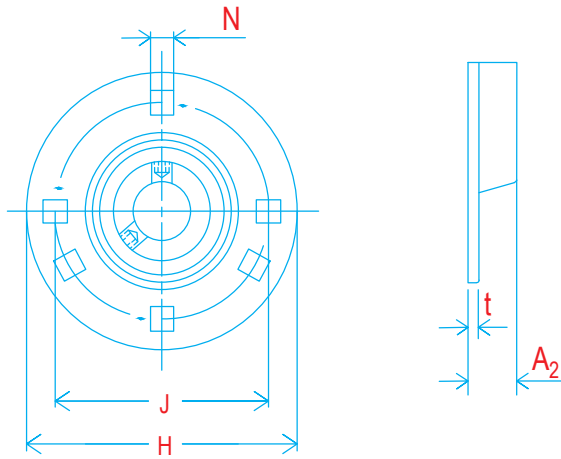


Rulman No	Boyutlar (mm)						Ağırlık (kg)
	d	H	J	t	N	A2	
PF 201	12,0	82,0	64,0	2,0	7,5	7,0	0,08
PF 202	15,0	82,0	64,0	2,0	7,5	7,0	0,08
PF 203	17,0	82,0	64,0	2,0	7,5	7,0	0,08
PF 204	20,0	91,0	71,0	2,0	9,0	8,0	0,08
PF 205	25,0	95,0	76,0	2,0	9,0	9,0	0,08
PF 206	30,0	113,0	90,0	2,5	10,5	9,0	0,10
PF 207	35,0	122,0	100,0	2,5	10,5	10,0	0,12
PF 208	40,0	148,0	119,0	3,5	14,0	12,0	0,12

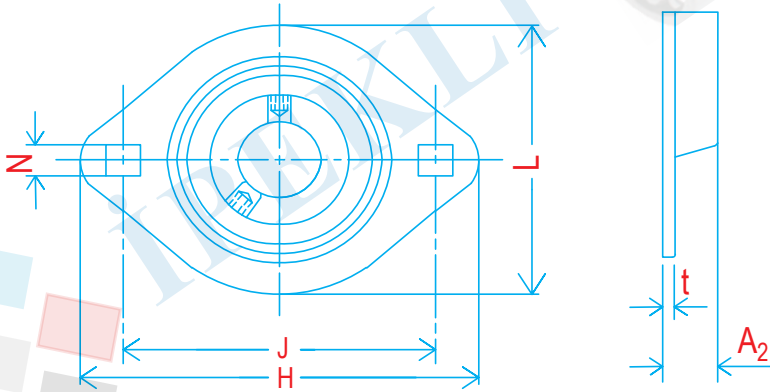


Rulman No	Boyutlar (mm)							Ağırlık (kg)
	d	H	J	L	N	t	A2	
PFL 201	12,0	81,0	63,5	59,0	7,0	2,0	7,0	0,07
PFL 202	15,0	81,0	63,5	59,0	7,0	2,0	7,0	0,07
PFL 203	17,0	81,0	63,5	59,0	7,0	2,0	7,0	0,08
PFL 204	20,0	90,0	71,5	67,0	9,0	2,0	8,0	0,08
PFL 205	25,0	95,0	76,0	71,0	9,0	2,0	9,0	0,08
PFL 206	30,0	113,0	90,5	84,0	10,5	2,5	9,0	0,10
PFL 207	35,0	122,0	100,0	94,0	10,5	2,5	10,0	0,10
PFL 208	40,0	148,0	119,0	100,0	13,5	3,5	12,0	0,12

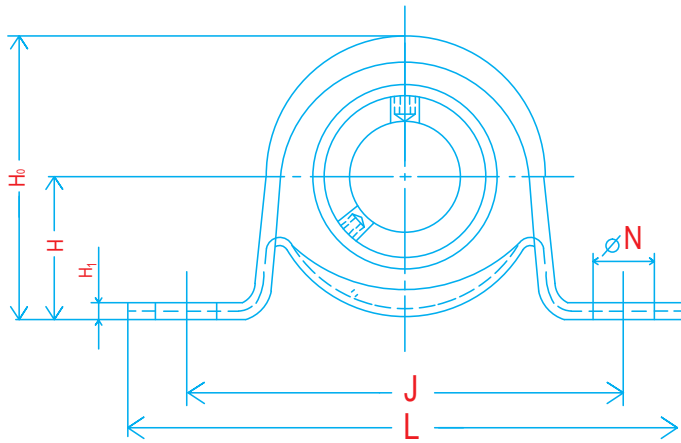

Rulman No	Boyutlar (mm)							Ağırlık (kg)
	d	L	H	H1	H0	J	N	
PP 201	12,0	85,7	22,2	2,4	43,2	68,0	9,0	0,15
PP 202	15,0	85,7	22,2	2,4	43,2	68,0	9,0	0,15
PP 203	17,0	85,7	22,2	2,4	43,2	68,0	9,0	0,15
PP 204	20,0	98,4	25,4	2,4	49,9	76,0	9,0	0,15
PP 205	25,0	108,0	28,6	2,8	55,8	86,0	11,0	0,15
PP 206	30,0	117,5	33,3	3,6	65,7	95,0	11,0	0,15
PP 207	35,0	128,6	39,7	4,4	77,5	106,0	11,0	0,15
PP 208	40,0	148,0	43,7	5,0	85,8	120,0	12,0	0,30

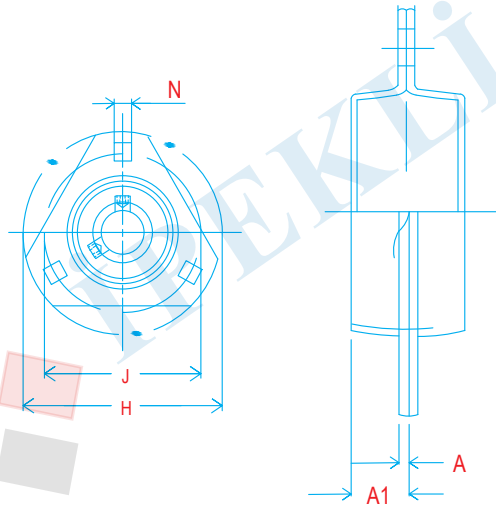


Rulman No	Boyutlar (mm)						Ağırlık (kg)
	d	H	J	N	A	A1	
PFT 201	12,0	81,0	63,5	8,7	2,0	4,0	0,15
PFT 202	15,0	81,0	63,5	8,7	2,0	4,0	0,15
PFT 203	17,0	81,0	63,5	8,7	2,0	4,0	0,15
PFT 204	20,0	90,2	71,5	8,7	2,0	4,0	0,15
PFT 205	25,0	95,2	76,0	8,7	2,0	4,0	0,15
PFT 206	30,0	112,7	90,5	10,5	2,5	5,0	0,15
PFT 207	35,0	122,2	100,0	10,5	2,5	5,0	0,15
PFT 208	40,0	148,0	119,0	13,5	2,5	5,0	0,30

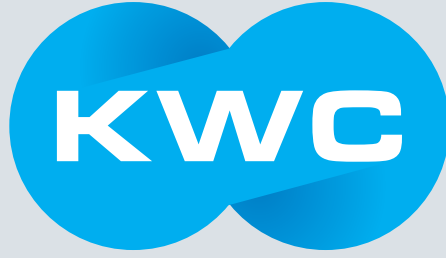

Yataklı Rulmanlar (Plastik Yatak Paslanmaz Rulman)



SUC




SUCF




SUCP



SUCT



SUCFL




SUCFC




SUCPA





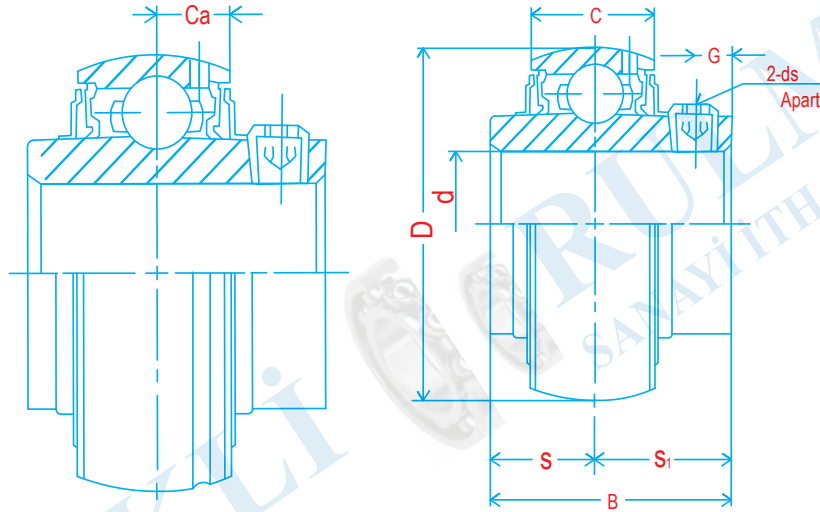



Rulman No	Boyutlar (mm)								Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Ağırlık (kg)
	d	D	B	C	S	S1	G	Ca	Dinamik	Statik		
SUC 201	12	47	31,0	17	12,7	18,3	5,0	4,3	12,82	6,65	4.000	0,21
SUC 202	15	47	31,0	17	12,7	18,3	5,0	4,3	12,82	6,65	4.000	0,19
SUC 203	17	47	31,0	17	12,7	18,3	5,0	4,3	12,82	6,65	4.000	0,18
SUC 204	20	47	31,0	17	12,7	18,3	5,0	4,3	12,82	6,65	4.000	0,16
SUC 205	25	52	34,1	17	14,3	19,8	5,4	4,2	14,03	8,05	3.400	0,18
SUC 206	30	62	38,1	19	15,9	22,2	5,5	5,3	19,47	11,43	2.800	0,33
SUC 207	35	72	42,9	20	17,5	25,4	6,9	5,8	25,69	15,55	2.400	0,49
SUC 208	40	80	49,2	21	19,0	30,2	8,0	6,2	29,51	18,14	2.200	0,65
SUC 209	45	85	49,2	22	19,0	30,2	8,0	6,5	31,85	20,80	1.900	0,71
SUC 210	50	90	51,6	24	19,0	32,6	10,0	7,0	34,99	23,70	1.800	0,80
SUC 211	55	100	55,6	25	22,2	33,4	10,0	7,4	43,34	29,39	1.600	1,08
SUC 212	60	110	65,1	27	25,4	39,7	10,0	7,6	47,68	33,43	1.500	1,51

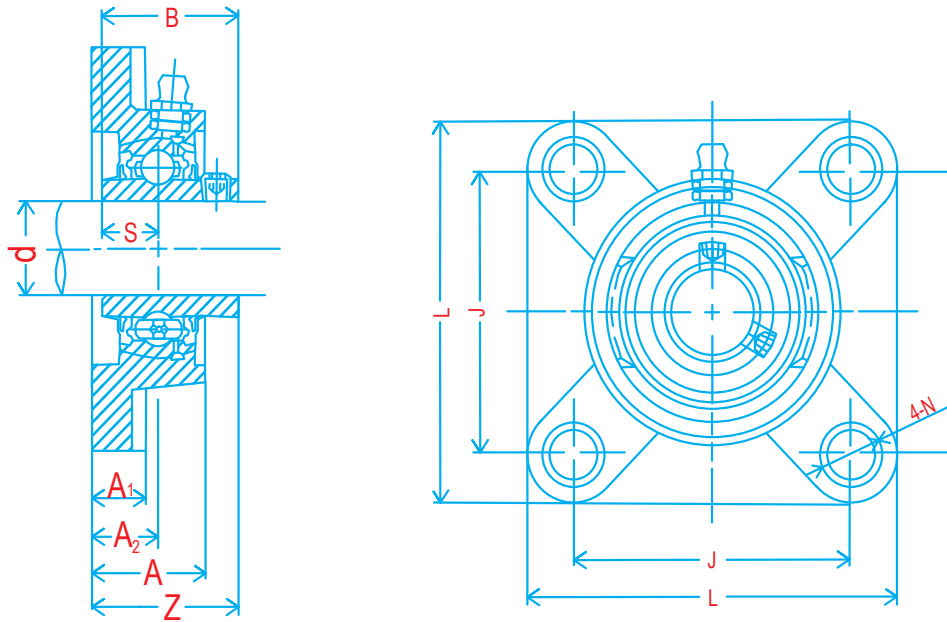



Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	L	J	A2	A1	A	N	B	S	Z	Dinamik	Statik			
SUCF 201	12	86	63,5	18,0	13	27,1	11	31,0	12,1	36,3	12,82	6,65	4.000	M10	0,29
SUCF 202	15	86	63,5	18,0	13	27,1	11	31,0	12,1	36,3	12,82	6,65	4.000	M10	0,29
SUCF 203	17	86	63,5	18,0	13	27,1	11	31,0	12,1	36,3	12,82	6,65	4.000	M10	0,29
SUCF 204	20	86	63,5	18,0	13	27,1	11	31,0	12,1	36,3	12,82	6,65	4.000	M10	0,29
SUCF 205	25	95	70,0	17,0	14	28,0	11	34,1	14,0	36,7	14,03	8,05	3.400	M10	0,32
SUCF 206	30	108	83,0	19,0	14	31,1	11	38,1	15,1	41,4	19,47	11,43	2.800	M10	0,54
SUCF 207	35	118	92,0	21,1	15	34,8	13	42,9	17,1	46,9	25,69	15,55	2.400	M12	0,75
SUCF 208	40	130	102,0	23,0	18	37,5	14	49,2	19,0	53,2	29,51	18,14	2.200	M12	0,99
SUCF 209	45	137	105,0	24,0	19	41,0	17	49,2	19,0	54,2	31,85	20,80	1.900	M16	1,12
SUCF 210	50	143	111,0	25,0	21	43,0	17	51,6	19,0	57,6	34,99	23,70	1.800	M16	1,24
SUCF 211	55	162	130,0	25,0	20	43,0	17	55,6	22,0	58,4	43,34	29,39	1.600	M16	1,58
SUCF 212	60	175	143,0	29,0	19	48,0	17	65,1	25,0	68,7	47,68	33,43	1.500	M16	2,10

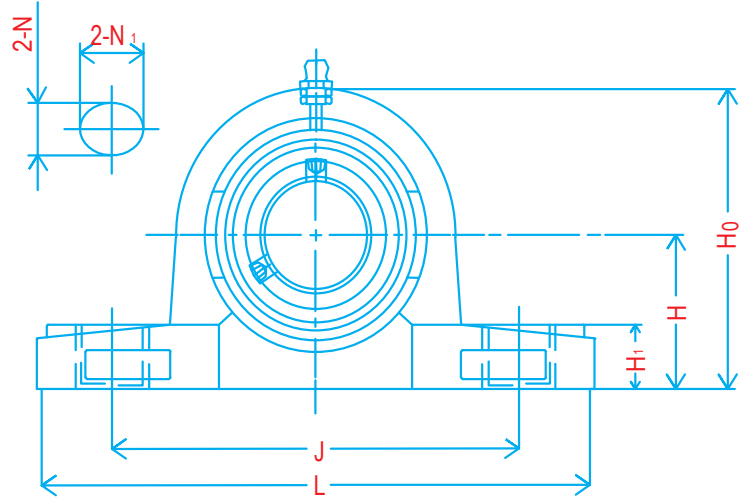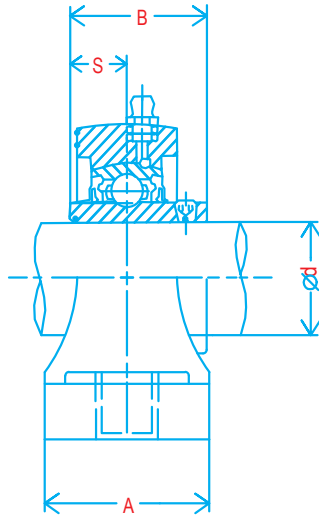


Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	N	N1	H1	Ho	B	S	Dinamik	Statik			
SUCP 201	12	33,3	127	95	38	11	14	15,0	65,5	31,0	12,1	12,82	6,65	4.000	M10	0,29
SUCP 202	15	33,3	127	95	38	11	14	15,0	65,5	31,0	12,1	12,82	6,65	4.000	M10	0,29
SUCP 203	17	33,3	127	95	38	11	14	15,0	65,5	31,0	12,1	12,82	6,65	4.000	M10	0,29
SUCP 204	20	33,3	127	95	38	11	14	15,0	65,5	31,0	12,1	12,82	6,65	4.000	M10	0,29
SUCP 205	25	36,5	140	105	38	11	14	16,0	71,0	34,1	14,0	14,03	8,05	3.400	M10	0,32
SUCP 206	30	42,9	163	119	46	14	18	18,0	84,0	38,1	15,1	19,47	11,43	2.800	M12	0,58
SUCP 207	35	47,6	168	127	48	14	18	18,0	94,5	42,9	17,1	25,69	15,55	2.400	M12	0,76
SUCP 208	40	49,2	184	137	54	14	18	19,5	99,0	49,2	19,0	29,51	18,14	2.200	M12	0,97
SUCP 209	45	54,0	192	146	54	17	20	23,0	106,0	49,2	19,0	31,85	20,80	1.900	M16	1,08
SUCP 210	50	57,2	206	159	60	17	20	24,0	114,0	51,6	19,0	34,99	23,70	1.800	M16	1,24
SUCP 211	55	63,5	217	172	60	17	20	22,0	124,0	55,6	22,0	43,34	29,39	1.600	M16	1,60
SUCP 212	60	69,9	238	186	66	18	24	24,0	137,0	65,1	25,0	47,68	33,43	1.500	M16	2,40

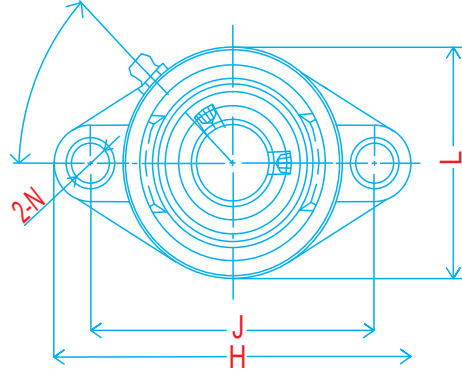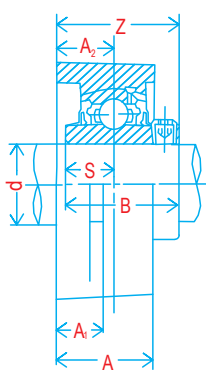


Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	J	A2	A1	A	N	L	B	S	Z	Dinamik	Statik			
SUCFL 201	12	113	90	15,0	14	26,1	11	65	31,0	12,1	33,7	6,65	4.000	M10	0,25	0,29
SUCFL 202	15	113	90	15,0	14	26,1	11	65	31,0	12,1	33,7	6,65	4.000	M10	0,25	0,29
SUCFL 203	17	113	90	15,0	14	26,1	11	65	31,0	12,1	33,7	6,65	4.000	M10	0,25	0,29
SUCFL 204	20	113	90	15,0	14	26,1	11	65	31,0	12,1	33,7	6,65	4.000	M10	0,25	0,29
SUCFL 205	25	131	99	17,0	14	29,0	11	69	34,1	14,0	36,7	8,05	3.400	M10	0,32	0,32
SUCFL 206	30	148	117	19,0	14	31,0	11	80	38,1	15,1	41,2	11,43	2.800	M10	0,50	0,58
SUCFL 207	35	166	130	18,0	16	32,0	13	92	42,9	17,1	43,4	15,55	2.400	M12	0,70	0,76
SUCFL 208	40	176	144	21,1	20	37,5	14	101	49,2	19,0	51,7	18,14	2.200	M12	0,89	0,97
SUCFL 209	45	189	148	24,0	21	41,0	17	108	49,2	19,0	54,2	20,80	1.900	M16	1,01	1,08
SUCFL 210	50	197	157	25,0	21	43,0	17	116	51,6	19,0	57,6	23,70	1.800	M16	1,13	1,24
SUCFL 211	55	224	184	25,0	20	43,0	17	130	55,6	22,0	58,1	29,39	1.600	M16	1,50	1,60
SUCFL 212	60	250	202	29,0	20	48,0	18	140	65,1	25,0	68,7	33,43	1.500	M16	2,10	2,40

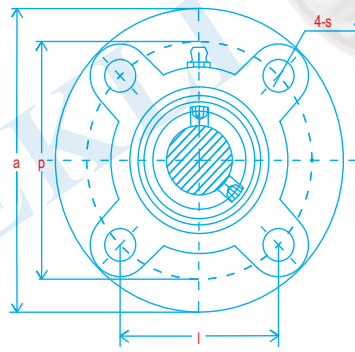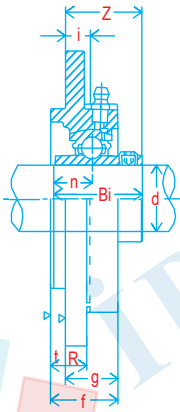


Rulman No	Boyutlar (mm)													Yük Sayısı (KN)		Devir - Hız Sınırı (dev/dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	a	p	i	l	s	t	R	g	f	z	Bi	n	Dinamik	Statik			
SUCFC 202	15	100	78	10	25,5	12	5	7	20,5	62	28,3	31,0	12,7	10,90	5,30	4.000	M10	0,39
SUCFC 203	17	100	78	10	25,5	12	5	7	20,5	62	28,3	31,0	12,7	10,90	5,30	4.000	M10	0,39
SUCFC 204	20	100	78	10	25,5	12	5	7	20,5	62	28,3	31,0	12,7	10,90	5,30	4.000	M10	0,39
SUCFC 205	25	115	90	10	27,0	12	6	7	21,0	70	29,8	34,1	14,3	11,90	8,30	3.400	M10	0,47
SUCFC 206	30	125	100	10	31,0	12	8	8	23,0	80	32,2	38,1	15,9	16,70	9,05	2.800	M10	0,70
SUCFC 207	35	135	110	11	34,0	14	8	9	26,0	90	36,4	42,9	17,5	22,00	12,30	2.400	M12	0,85
SUCFC 208	40	145	120	11	36,0	14	10	9	26,0	100	41,2	49,2	19,0	24,90	14,31	2.200	M12	1,00
SUCFC 209	45	160	132	10	38,0	16	12	10	26,0	105	40,2	49,2	19,0	28,10	16,40	1.900	M14	1,40
SUCFC 210	50	165	138	10	40,0	16	12	14	28,0	110	42,6	51,6	19,0	30,20	18,60	1.800	M14	1,50
SUCFC 211	55	185	150	13	42,0	19	12	15	31,0	125	46,4	55,6	22,2	34,00	25,50	1.600	M16	2,00
SUCFC 212	60	195	160	17	48,0	19	12	15	36,0	135	56,7	65,1	25,4	41,00	31,50	1.500	M16	2,35

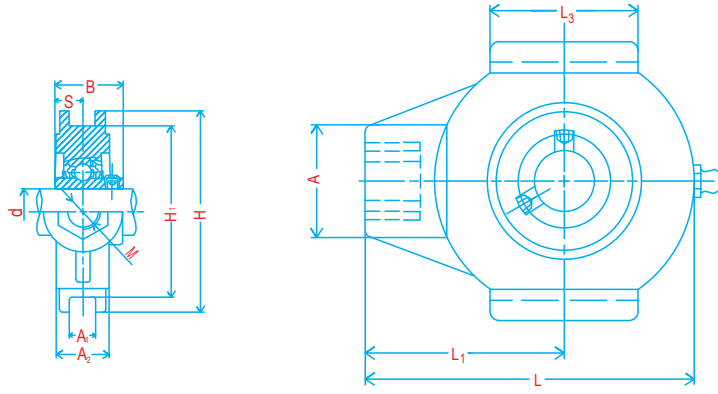



Rulman No	Boyutlar (mm)												Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	L	A2	A1	L1	H	H1	M	A	L3	B	S	Dinamik	Statik			
SUCT 201	12	99	27,1	12	64	88	76	M16	36	47	31,0	12,1	12,82	6,65	4.000	0,33	0,29
SUCT 202	15	99	27,1	12	64	88	76	M16	36	47	31,0	12,1	12,82	6,65	4.000	0,33	0,29
SUCT 203	17	99	27,1	12	64	88	76	M16	36	47	31,0	12,1	12,82	6,65	4.000	0,33	0,29
SUCT 204	20	99	27,1	12	64	88	76	M16	36	47	31,0	12,1	12,82	6,65	4.000	0,33	0,29
SUCT 205	25	99	27,1	12	64	88	76	M16	36	47	34,1	14,0	14,03	8,05	3.400	0,34	0,32
SUCT 206	30	125	34,5	12	76	102	89	M16	40	63	38,1	15,1	19,47	11,43	2.800	0,62	0,58
SUCT 207	35	125	34,5	12	76	102	89	M16	40	63	42,9	17,1	25,69	15,55	2.400	0,73	0,76
SUCT 208	40	140	34,5	16	85	114	102	M16	40	80	49,2	19,0	29,51	18,14	2.200	0,96	0,97
SUCT 209	45	149	40,0	16	90	116	102	M20	50	85	49,2	19,0	31,85	20,80	1.900	1,14	1,08
SUCT 210	50	149	40,0	16	90	116	102	M20	50	85	51,6	19,0	34,99	23,70	1.800	1,17	1,24
SUCT 211	55	171	42,0	22	106	146	130	M20	64	95	55,6	22,0	43,34	29,39	1.600	1,98	1,60
SUCT 212	60	194	42,0	22	119	146	130	M20	64	102	65,1	25,0	47,68	33,43	1.500	2,45	2,40

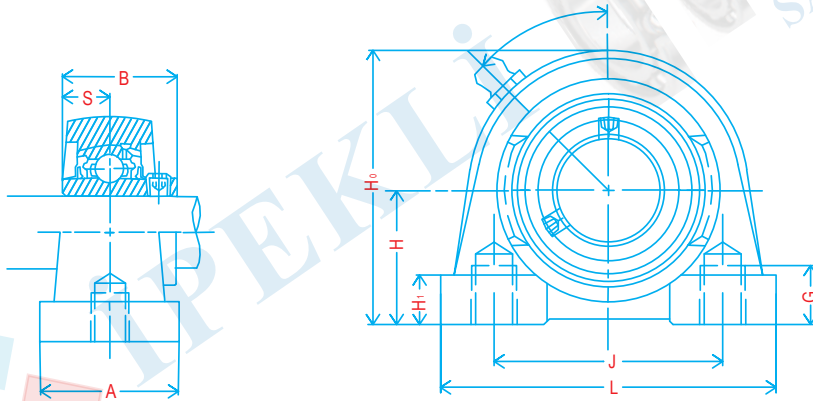


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	Ho	G	H1	B	S	Dinamik	Statik			
SUCPA 201	12	33,3	76	52	38	64	10	13	31,0	12,1	12,82	6,65	4.000	M8	0,26
SUCPA 202	15	33,3	76	52	38	64	10	13	31,0	12,1	12,82	6,65	4.000	M8	0,26
SUCPA 203	17	33,3	76	52	38	64	10	13	31,0	12,1	12,82	6,65	4.000	M8	0,26
SUCPA 204	20	33,3	76	52	38	64	10	13	31,0	12,1	12,82	6,65	4.000	M8	0,26
SUCPA 205	25	36,5	84	56	38	72	12	14	34,1	14,3	14,03	8,05	3.400	M10	0,32
SUCPA 206	30	42,9	95	66	48	84	12	16	38,1	15,1	19,47	11,43	2.800	M10	0,53
SUCPA 207	35	47,6	110	80	48	95	12	18	42,9	17,1	25,69	15,55	2.400	M10	0,73
SUCPA 208	40	49,2	116	84	54	100	15	18	49,2	19,0	29,51	18,14	2.200	M12	0,93
SUCPA 209	45	54,2	120	90	54	108	15	20	49,2	19,0	31,85	20,80	1.900	M12	1,06
SUCPA 210	50	57,2	130	94	60	116	18	21	51,6	19,0	34,99	23,70	1.800	M16	1,25


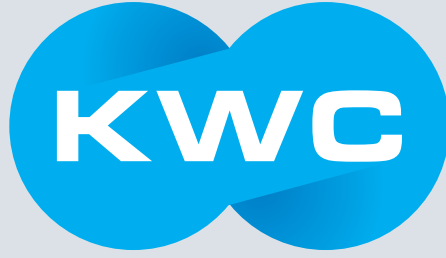


Yataklı Rulmanlar (Komple Paslanmaz)





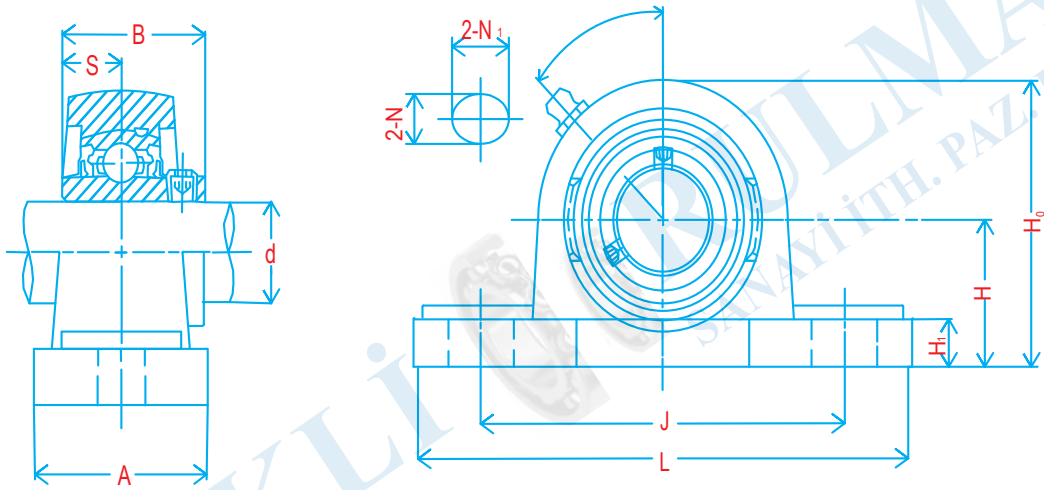


Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir - Hız Sınırı (dev/dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	L	J	A	N	N1	H1	H0	B	S	Dinamik	Statik			
SSUCP 204	20	33,3	127	95,0	38	13	19	15,0	64,0	31,0	12,1	12,82	6,65	4.000	M10	0,79
SSUCP 205	25	36,5	140	105,0	38	13	19	16,1	70,0	34,1	14,0	14,03	8,05	3.400	M10	0,95
SSUCP 206	30	42,9	165	121,0	48	17	21	18,0	82,0	38,1	15,1	19,47	11,43	2.800	M12	1,49
SSUCP 207	35	47,6	167	127,0	48	17	21	19,0	92,0	42,9	17,1	25,69	15,55	2.400	M12	1,93
SSUCP 208	40	49,2	184	137,0	54	17	22	19,0	99,0	49,2	19,0	29,51	18,14	2.200	M12	2,26
SSUCP 209	45	54,0	190	146,0	54	17	22	20,0	108,0	49,2	19,0	31,85	20,80	1.900	M12	2,76
SSUCP 210	50	57,2	206	159,0	60	20	25	22,0	112,0	51,6	19,0	34,99	23,70	1.800	M16	3,31
SSUCP 211	55	63,5	219	171,0	60	20	25	23,0	124,0	55,6	22,0	43,34	29,39	1.600	M16	3,98
SSUCP 212	60	69,9	238	184,0	70	20	25	25,0	137,0	65,1	25,0	47,68	33,43	1.500	M16	5,42

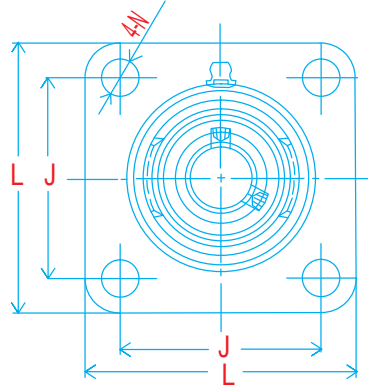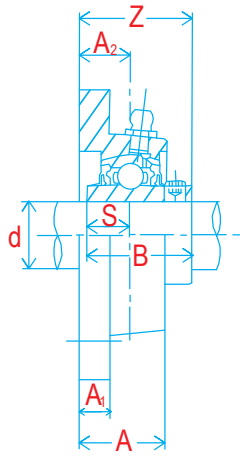


Rulman No	Boyutlar (mm)										Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	L	J	A2	A1	A	N	Z	B	S	Dinamik	Statik			
SSUCF 204	20	86	64	15	11	25,1	12	33,3	31,0	12,1	12,82	6,65	4.000	M10	0,71
SSUCF 205	25	95	70	16	13	28,0	12	35,8	34,1	14,0	14,03	8,05	3.400	M10	0,97
SSUCF 206	30	108	83	18	13	31,0	12	40,2	38,1	15,1	19,47	11,43	2.800	M10	1,41
SSUCF 207	35	117	92	19	15	34,0	14	44,4	42,9	17,1	25,69	15,55	2.400	M12	1,86
SSUCF 208	40	130	102	21	15	36,0	16	51,2	49,2	19,0	29,51	18,14	2.200	M14	2,3
SSUCF 209	45	137	105	22	16	38,0	16	52,2	49,2	19,0	31,85	20,80	1.900	M14	2,71
SSUCF 210	50	143	111	22	16	40,0	16	54,6	51,6	19,0	34,99	23,70	1.800	M14	2,93
SSUCF 211	55	162	130	25	18	43,0	19	58,4	55,6	22,0	43,34	29,39	1.600	M16	4,13
SSUCF 212	60	175	143	29	18	48,0	19	68,7	65,1	25,0	47,68	33,43	1.500	M16	5,51

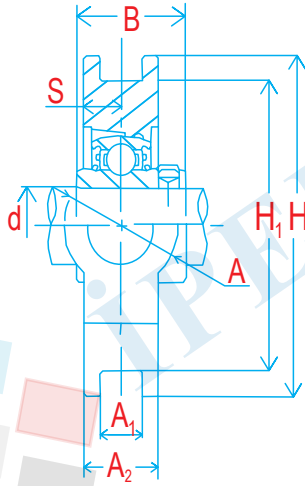

Rulman No	Boyutlar (mm)																Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	N1	L2	H2	N2	N	L3	A1	H1	H	L	A	A2	L1	B	S	Dinamik	Statik			
SSUCT 204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31,0	12,1	12,82	6,65	4.000	M10	0,79
SSUCT 205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34,1	14,0	14,03	8,05	3.400	M14	0,84
SSUCT 206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38,1	15,1	19,47	11,43	2.800	M14	1,32
SSUCT 207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42,9	17,1	25,69	15,55	2.400	M14	1,72
SSUCT 208	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49,2	19,0	29,51	18,14	2.200	M14	2,52
SSUCT 209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49,2	19,0	31,85	20,80	1.900	M16	2,52
SSUCT 210	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51,6	19,0	34,99	23,70	1.800	M16	2,69
SSUCT 211	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55,6	22,0	43,30	29,40	1.600	M16	4,04
SSUCT 212	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65,1	25,0	47,70	33,40	1.500	M16	5,00

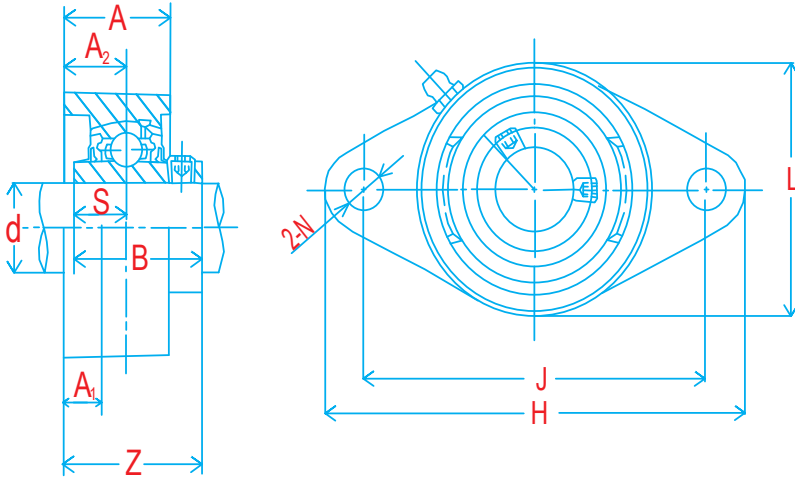

Rulman No	Boyutlar (mm)											Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	H	J	A2	A1	A	N	L	Z	B	S	Dinamik	Statik			
SSUCFL 204	20	113	90	15	11	27	12,0	60	33,3	31,0	12,1	12,82	6,65	4.000	M10	0,50
SSUCFL 205	25	130	99	16	13	28	12,1	68	35,8	34,1	14,0	14,03	8,05	3.400	M14	0,71
SSUCFL 206	30	148	117	18	13	31	12,1	79	40,2	38,1	15,1	19,47	11,43	2.800	M14	1,04
SSUCFL 207	35	161	130	19	14	34	14,0	90	44,4	42,9	17,1	25,69	15,55	2.400	M14	1,38
SSUCFL 208	40	175	144	21	15	36	14,0	100	51,2	49,2	19,0	29,51	18,14	2.200	M14	1,73
SSUCFL 209	45	187	148	22	16	38	16,0	108	52,2	49,2	19,0	31,85	20,8	1.900	M16	2,07
SSUCFL 210	50	195	157	22	16	40	16,0	115	54,6	51,6	19,0	34,99	23,7	1.800	M16	2,47
SSUCFL 211	55	224	184	25	18	43	19,0	130	58,1	55,6	22,2	43,34	29,39	1.600	M16	3,10
SSUCFL 212	60	250	202	29	18	48	23,0	140	68,7	65,1	25,4	47,68	33,43	1.500	M16	4,19

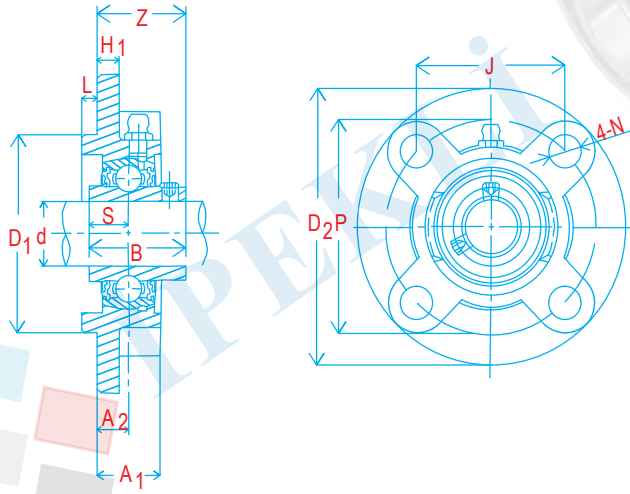

Rulman No	Boyutlar (mm)													Yük Sayısı (KN)		Devir - Hız Sınırı (dev./dak.)	Civata Ölçüsü	Ağırlık (kg)
	d	D2	P	J	A2	N	L	H1	A1	D1	B	S	Z	Dinamik	Statik			
SSUCFC 204	20	100	78	55,1	10	12	5	7	21	62	31,0	12,7	28,3	12,82	6,65	4.000	M10	0,77
SSUCFC 205	25	115	90	63,6	10	12	6	7	21	70	34,1	14,3	29,7	14,03	8,05	3.400	M10	1,13
SSUCFC 206	30	125	100	70,7	10	12	8	8	23	80	38,1	15,9	32,2	19,47	11,43	2.800	M10	1,47
SSUCFC 207	35	135	110	77,8	11	14	8	9	26	90	42,9	17,5	36,4	25,69	15,55	2.400	M12	1,86
SSUCFC 208	40	145	120	84,8	11	14	10	9	26	100	49,2	19,0	41,2	29,51	18,14	2.200	M12	2,17
SSUCFC 209	45	160	132	93,3	10	16	12	10	26	105	49,2	19,0	40,2	31,85	20,8	1.900	M14	2,50
SSUCFC 210	50	165	138	97,6	10	16	12	14	28	110	51,6	19,0	42,6	34,99	23,7	1.800	M14	2,95
SSUCFC 211	55	185	150	106,1	13	19	12	13	30	125	55,6	22,2	46,4	43,3	29,4	1.600	M16	4,00
SSUCFC 212	60	195	160	113,1	17	19	12	15	35	135	65,1	25,4	56,7	47,7	33,4	1.500	M16	4,90