

Plastic Washing System

Our system solutions cover a wide range of recycling applications.
Genox specialize in providing customized designs for your specific recycling projects.



www.genotech.com

We reserve the right to make technical changes without prior announcement. All rights reserved.
©2019 GENOX RECYCLING TECH (CHINA) CO., LTD.

GENOX

GENOX RECYCLING TECH (CHINA) CO., LTD.

#11 of No.3 Guangzhu road, Dongchong, Nansha, Guangzhou, China
Tel. +86 20 66851345 #810 Fax. +86 20 66851347
e-mail. info@genotech.com



GENOX

Plastic Washing System

Features

The PE/PP Film system is designed for washing plastic films with contamination levels exceeding 80% Minimizing the recycling water flow rate and evaporation losses.

- 1 Pre-shredding and pre-washing system removes a large percentage of abrasive materials (sand, grit etc.) to protect the rest of the system.
- 2 Under water force-washing paddles in our washing tanks maximize the washing efficiency.
- 3 High speed washing system optimized according to the specific material type liberates and separates contamination from film flakes.

- 4 Mechanical (centrifugal and squeezing) systems control the moisture content of the finished product at < 5% moisture the material is suitable for high quality pelletizing.

Intelligent system automation ensures that components actions are sequenced and monitored.

Applications

- Agricultural films
- Recovered films from MSW or MRF's
- Films recovered from Landfills
- Post-industrial or post-consumer films
- Big bags (Raffia)



Film Press



Float-Sink Washing Tank




Centrifugal Dryer



Inclined Friction Washer



Pre-Washer

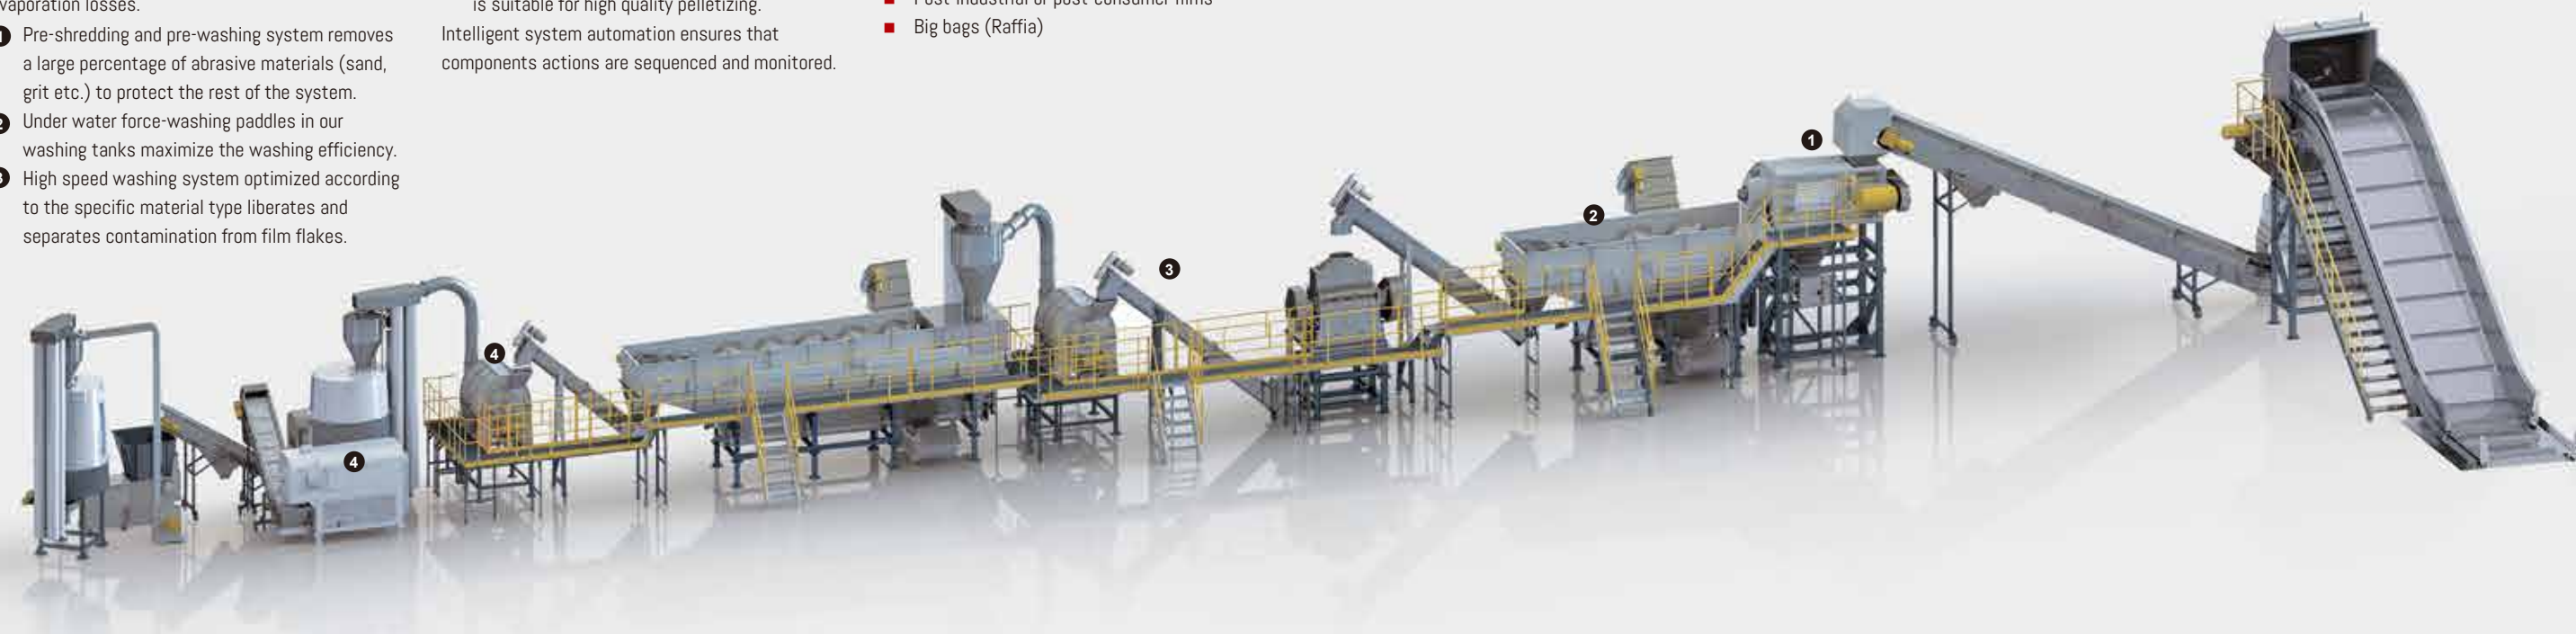

Pre-washer		
Model	GRD6025	GRD8025
Dimension (L x W x H) (mm)	3020 × 4060 × 2400	3600 × 4160 × 2400
Rotation Speed (RPM)	760	760
Rotation Diameter (mm)	555	755
Moter Power (kw)	45	55
Weight (kg)	4330	5600

Inclined Friction Washer	
Model	GFW5030
Dimension (L x W x H) (mm)	2985×1065×3700
Speed (RPM)	980
Rotation Diameter (mm)	500
Moter Power (kw)	18.5
Weight (kg)	1450

Centrifugal Dryer		
Model	GSW650R	GSW800R
Dimension (L x W x H) (mm)	3420 × 1415 × 1825	3860 × 1535 × 2045
Rotation Speed (RPM)	1450	1450
Rotation Diameter (mm)	650	800
Moter Power (kw)	55	90
Weight (kg)	2600	4500

Float-Sink Washing Tank			
Model	GSF1260M	GSF1580M	GSF1880M
Dimension (L x W x H) (mm)	7790 × 5170 × 3640	8640 × 5170 × 3640	8640 × 5170 × 3640
Tank Width(mm)	1200	1500	1800
Number of Rollers (PCS)	5	6	6
Moter Power (kw)	4.6	6.3	6.3
Weight (kg)	4060	4930	5750

Film Press	
Model	GXJ400
Dimension (L x W x H) (mm)	3430 × 1470 × 2055
Rotation Speed (RPM)	49
Rotation Diameter (mm)	360
Moter Power (kw)	55
Weight (kg)	5630